



# NEWEX

**Experience New**

## NEWEX INTERNATIONAL CO., LTD

**PHILEXI is a trademark of NEWEX INTERNATIONAL CO., LTD**

Sourcing Manager/ Sales Manager: Mr. Justin

Whatsapp/Mobile/Wechat: +8613928822021

Skype ID: liangshizong

Email: [justin@philexi.com](mailto:justin@philexi.com), [justin.liang@newexintl.com](mailto:justin.liang@newexintl.com)

***Hongkong Office Address:***

FLAT/RM 02, 7/F, SPA CENTRE,  
NO.53-55 LOCKHART ROAD,  
WAN CHAI, HONG KONG

***Guangzhou Office Address:***

Room 505, BLDG A, Hengda Business  
Center, 3rd Bigui Road, Luopu Street,  
Panyu District, Guangzhou, China

# Copeland Scroll™ ZW Compressor for Heat Pump Water Heating




Product catalogue

**COPELAND™**

  
**EMERSON™**



## Over 10 years of heat pump technology and expertise

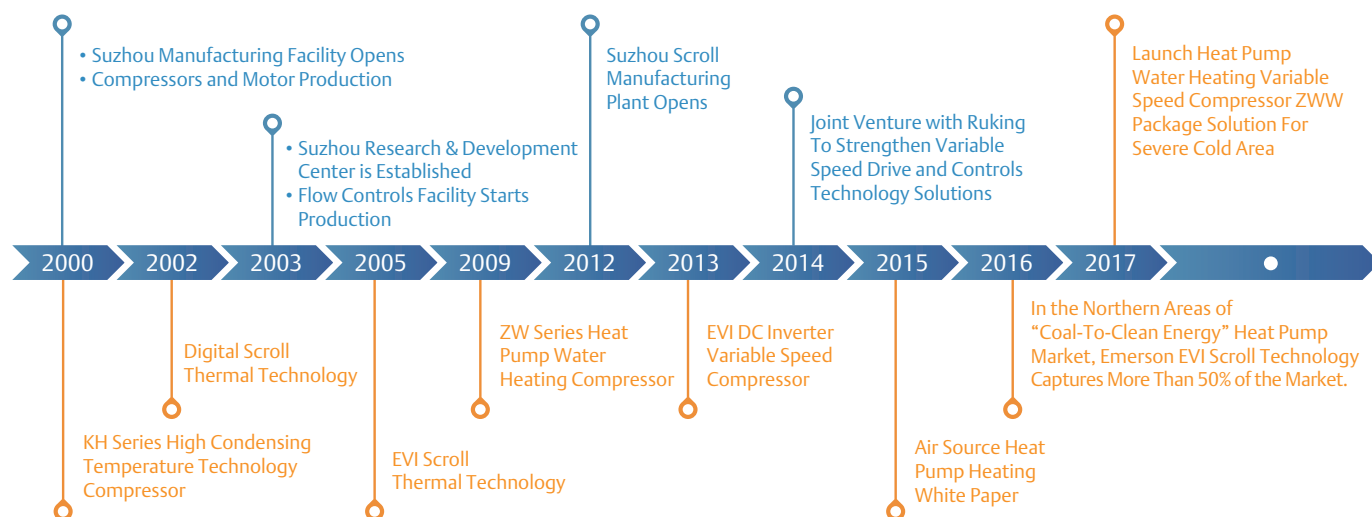

## Table of contents

Overview	01
Bill of material	02
Nomenclature	02
Operating envelopes	05
Compressor model overview	06
Contact lists	55



# Copeland Scroll™ ZW for heat pump water heating



Compared to conventional electric heaters or fuel boilers, Copeland Scroll ZW compressors have a higher energy efficiency ratio, and are widely used for sanitary water heating, residential heating, drying, electroplating and other industrial fields. Backed with experience of over 100 million scroll compressors produced, Emerson is recognized as an industry leader with unmatched reliability and efficiency.

Copeland Scroll ZW compressors for heat pumps use Copeland EVI (Enhanced Vapor Injection) scroll heating technology and a host of new design features to create a strong core for any heat pump system. With Emerson's EVI scroll heating technology, heat range for heat pumps and water heating systems are reliably extended to -30°C ambient temperature. Heating capacity and energy efficiency are increased by about 40% and 22% respectively. Copeland Scroll ZW compressors not only can produce quality sanitary heating for residential applications but also can produce 85°C of hot water for industrial applications.



Copeland Scroll ZW compressors are uniquely designed for scroll and axial compliance which in turn make ZW scroll compressors attain higher compression ratios and greater pressure difference. Compared with normal heat pump air conditioning compressors, it offers a wider range of operations. Equipped with a highly efficient and powerful motor, ZW compressor meets the demand for heat pump and water heating under extreme conditions. ZW compressors can also be installed in tandem to meet with larger capacity heating requirements while oil and gas balance ports ensure proper operation.

ZW Digital Scroll™ compressors utilize radial and axial compliance to allow capacity adjustment by forcing the scroll set to disengage. The refrigerant compression can be stopped without turning off the compressor. When the scrolls are in the “unloaded” state, the compressor capacity is 0% and while they are in the “loaded” state, the compressor capacity output is at a 100%. In a certain period (such as 15 seconds), the output capacity is the sum of the average time in the “unloaded” and “loaded” states. The Copeland Digital Scroll compressor can adjust from 10% to 100% capacity (or vice versa) instantaneously by varying the relative durations of loaded and unloaded cycle times to allow for accurate temperature control.

In addition, ZW compressors can use environmentally friendlier zero ODP refrigerants and in combination with high efficiency technology solutions effectively reduce CO<sub>2</sub> emissions to minimize environmental impact.

## Heated swimming pool



## Hot water



## Space heating



# The advantages of Emerson Copeland Scroll™ ZW

Performance	Normal air conditioning scroll	Normal heating scroll	Copeland scroll ZW EVI
Heating capacity	Benchmark	Over benchmark 10%	Over benchmark 40%
Minimum ambient temperature	0°C	0°C	-30°C
HCOP	Benchmark	Over benchmark 5%	Over benchmark 20%
Maximum water temperature	45°C	55°C	65°C


## Bill of material (BOM)

Compressor model	BOM code	Suction/ Displacement brazing connection	EVI Brazing connection
ZW30KS(E)	582	✓	✓
ZW30KA(E)	582	✓	
ZW34KS(E)	582	✓	✓
ZW34KA(E)	582	✓	
ZW42KS(E)	522	✓	✓
ZW52KS(E)	522	✓	✓
ZW52KA(E)	522	✓	
ZW61KS(E)	522	✓	✓
ZW61KA(E)	522/52E	✓	
ZW61KBE	522	✓	
ZW68KS(E)	522	✓	✓
ZW72KA(E)	52E	✓	
ZW72KBE	522	✓	
ZW79KS(E)	522	✓	✓
ZW79KA(E)	522	✓	
ZW79KBE	522	✓	
ZW108KS(E)	522	✓	✓



Compressor model	BOM code	Suction/ Displacement brazing connection	EVI Brazing connection
ZW108KA(E)	522	✓	
ZW124KS(E)	52E	✓	✓
ZW124KA(E)	52E	✓	
ZW125KS(E)	522	✓	✓
ZW125KA(E)	522	✓	
ZW125KBE	522	✓	
ZW150KS(E)	522	✓	✓
ZW150KA(E)	522	✓	
ZW150KBE	522	✓	
ZWD61KA(E)	532	✓	
ZWD61KBE	522	✓	
ZWD72KA(E)	53E	✓	
ZWD72KBE	532	✓	
ZWD81KA(E)	532	✓	
ZWD81KBE	532	✓	
ZW059HSP	582	✓	✓
ZW096HSP	522	✓	✓

Compressor model	BOM code	Suction/ Displacement brazing connection	EVI Brazing connection
ZW102HSP	522	✓	✓
ZW126HSP	522	✓	✓
ZW166HAP	522	✓	
ZW188HAP	522	✓	
ZW258HSP	522	✓	✓
ZW286HSP	522	✓	✓
ZW430HSP	522	✓	✓
ZW520HSP	522	✓	✓
ZW28KWP	58E	✓	
ZW31KWP	522	✓	
ZW42KWP	522/52E	✓	
ZW51KWP	522	✓	
ZW54KWP	52E	✓	
ZW72KWP	52E	✓	
ZW83KWP	522	✓	
VPW038DE	571	✓	✓
ZWW050SP	522	✓	✓

## Nomenclature

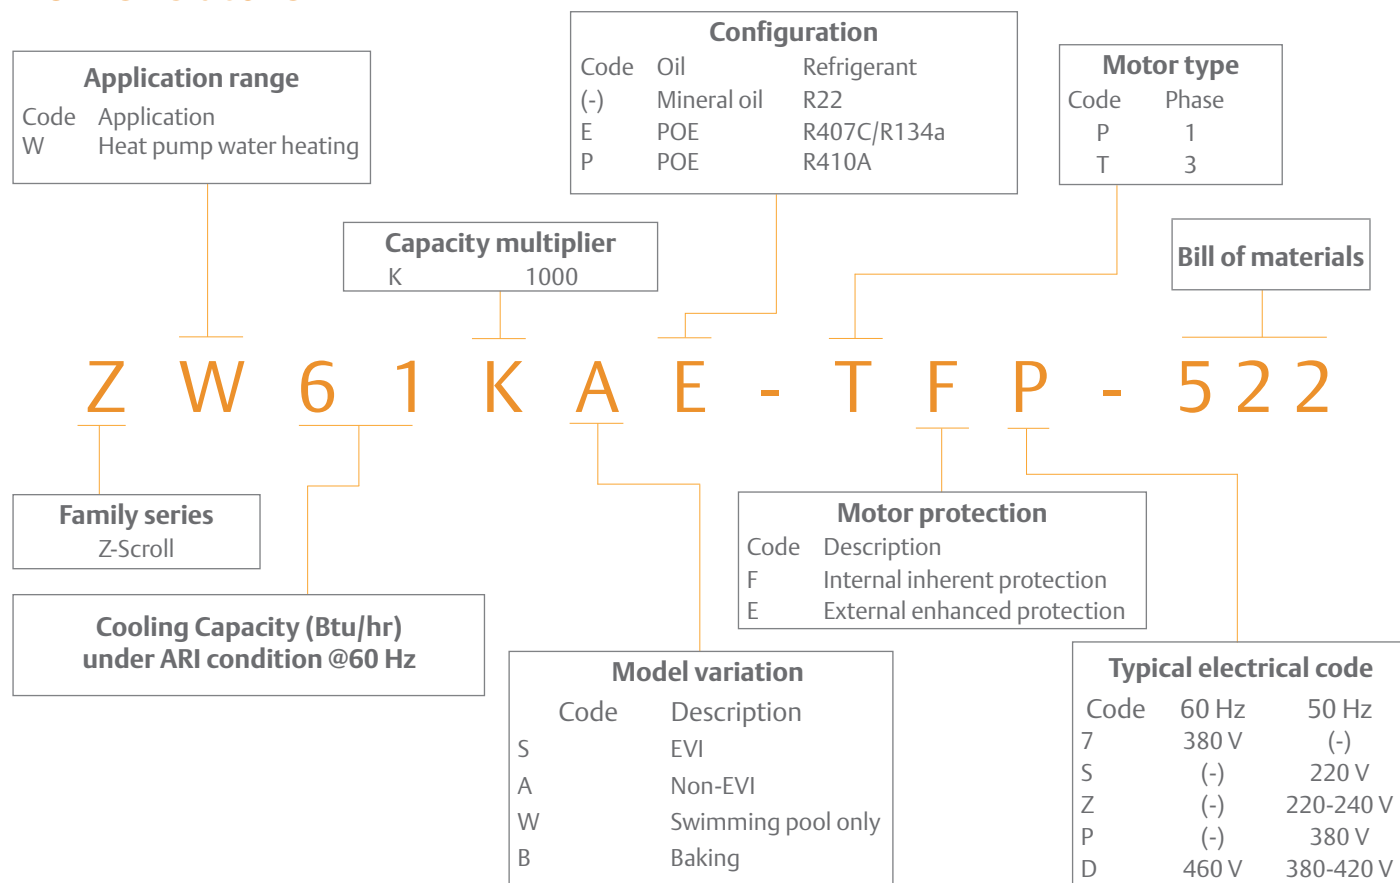

# Nomenclature

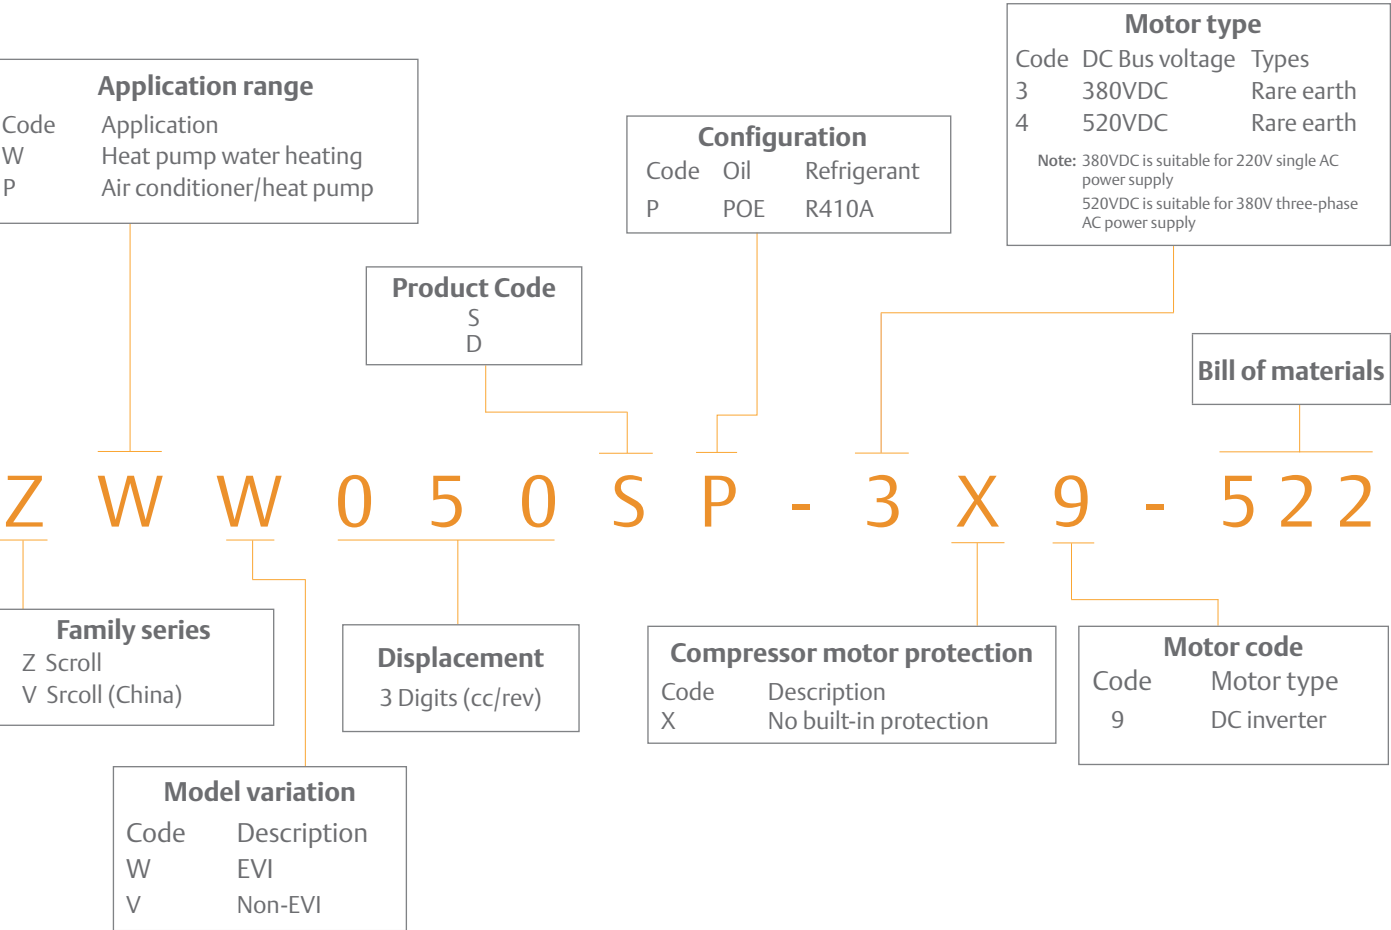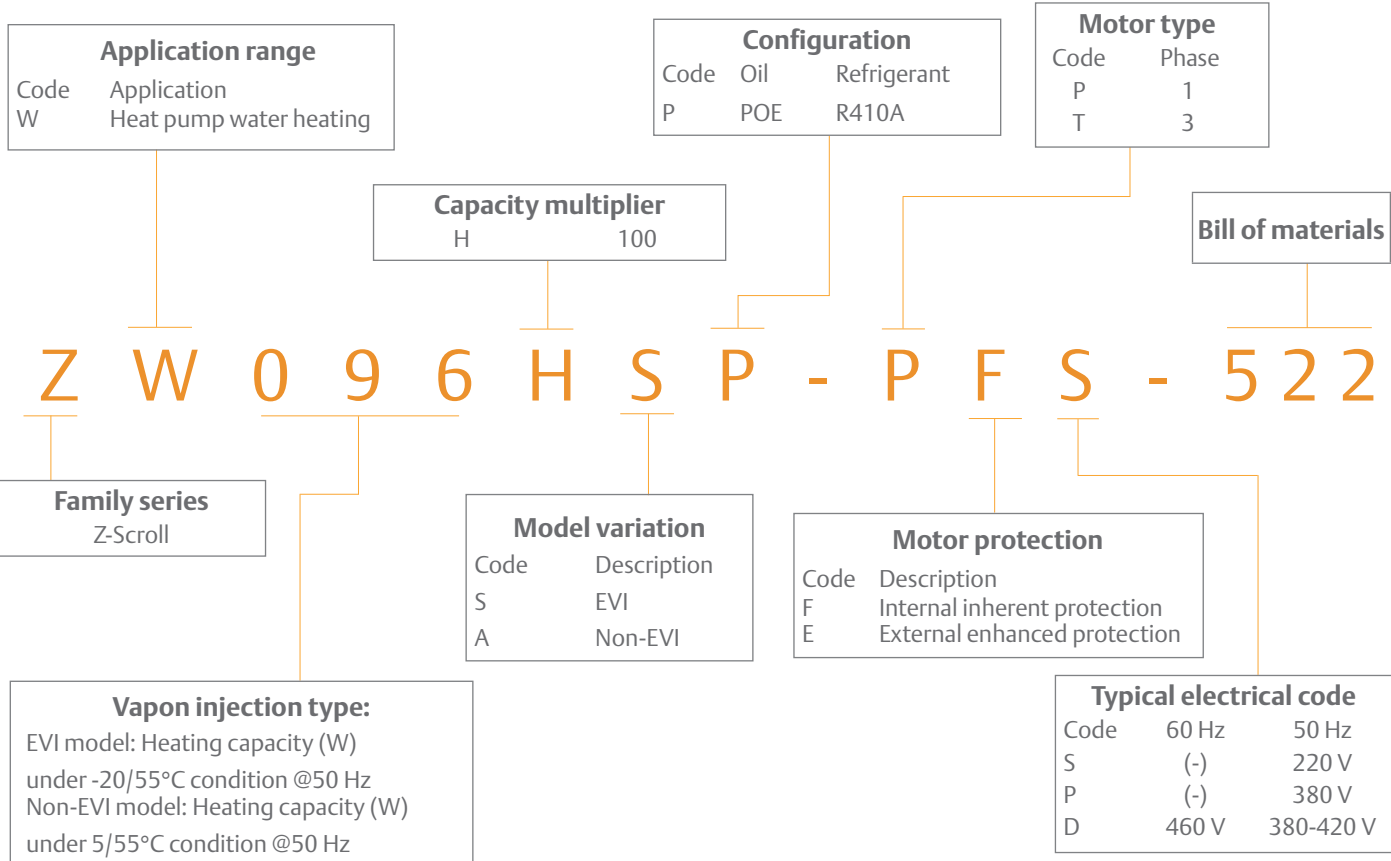



## Compressor model


Refrigerant	Compressor model	Power supply	EVI	Rated heating capacity (kW)	Performance table	Specification
R22	ZW30KA-PFS-582	1Φ/220 V/50 Hz		9.0	P11	P27
	ZW30KS-PFS-582		✓	10.1	P6	P26
	ZW34KA-PFS-582			10.1	P11	P27
	ZW34KS-PFS-582		✓	11.6	P6	P26
	ZW52KA-PFS-522			15.8	P11	P27
	ZW34KA-TFP-582	3Φ/380 V/50 Hz		10.1	P12	P27
	ZW34KS-TFP-582		✓	11.2	P7	P26
	ZW57KH-TFP-522			17.1	P14	P27
	ZW61KA-TFP-522			18.1	P12	P27
	ZW61KA-TFP-52E			18.1	P12	P27
	ZW61KH-TFP-522			18.2	P14	P27
	ZW61KS-TFP-522		✓	20.3	P7	P26
	ZW72KA-TFP-52E			21.4	P12	P27
	ZW79KA-TFP-522			24.7	P12	P27
	ZW79KS-TFP-522		✓	25.8	P7	P26
	ZW108KA-TFP-522			31.2	P12	P27
	ZW108KS-TFP-522		✓	35.9	P7	P26
	ZW124KA-TFP-52E			37.2	P13	P27
	ZW124KS-TFP-52E		✓	42.6	P8	P26
	ZW125KA-TFP-522			36.8	P13	P27
	ZW125KS-TFP-522		✓	41.6	P8	P26
	ZW150KA-TFP-522			45.4	P13	P27
	ZW150KS-TFP-522		✓	50.4	P8	P26
	ZW34KS-TF7-582	3Φ/380 V/60 Hz	✓	13.5	P7	P26
	ZW61KA-TF7-542			21.9	P12	P27
	ZW108KS-TF7-522		✓	43.1	P7	P26
R407C	ZW30KAE-PFS-582	1Φ/220 V/50 Hz		8.8	P15	P28
	ZW34KAE-PFS-582			9.3	P15	P28
	ZW52KAE-PFS-522			15.3	P15	P28
	ZW34KAE-TFP-582	3Φ/380 V/50 Hz		9.8	P16	P28
	ZW34KSE-TFP-582		✓	10.8	P9	P26
	ZW61KAE-TFP-522			17.7	P16	P28
	ZW61KAE-TFP-52E			17.7	P16	P28
	ZW61KSE-TFP-522		✓	19.6	P9	P26
	ZW72KAE-TFP-52E			21.2	P16	P28
	ZW79KAE-TFP-522			24.8	P16	P28
	ZW79KSE-TFP-522		✓	26.1	P9	P26
	ZW108KAE-TFP-522			30.9	P16	P28
	ZW108KSE-TFP-522		✓	35.6	P9	P26
	ZW124KAE-TFP-52E			36	P17	P28
	ZW124KSE-TFP-52E		✓	41.76	P10	P26
	ZW125KAE-TFP-522			35.6	P17	P28
	ZW125KSE-TFP-522		✓	40.9	P10	P26
	ZW150KAE-TFP-522			44.2	P17	P28
	ZW34KSE-TF7-582	3Φ/380 V/60 Hz	✓	13	P9	P30
	ZW61KAE-TF7-542			21.2	P16	P30
	ZW61KSE-TF7-542		✓	23.8	P9	P30
	ZW108KSE-TF7-522		✓	42.8	P9	P30
R410A	ZW28KWP-PFZ-58E	1Φ/220-240 V/50 Hz		8.7	P18	P28
	ZW31KWP-PFZ-522			9.3	P18	P28
	ZW42KWP-PFZ-522			12.8	P18	P28
	ZW51KWP-PFZ-522			15.2	P19	P28
	ZW42KWP-TFD-52E	3Φ/380-420 V/50 Hz or 3Φ/460 V/60 Hz		12.7	P20/P25	P28/P30
	ZW54KWP-TFD-52E			16.1	P20/P25	P28/P30
	ZW72KWP-TFD-52E			21.4	P20/P25	P28/P30
	ZW83KWP-TFD-522			24.7	P21/P25	P28/P30
	ZW102HSP-TFP-522	3Φ/380 V/50 Hz	✓	18.9	P22	P29
	ZW166HAP-TFP-522			16.6	P21	P29
	ZW188HAP-TEP-522			18.4	P21	P29
	ZW430HSP-TE7-522	3/380V/60Hz	✓	81.5		P30



# Operating envelopes


ZW30KS, ZW34KS(E)-TFP, ZW61KS(E),  
ZW79KS(E), ZW124KS(E), ZW125KS(E),  
ZW150KS

R22/R407C

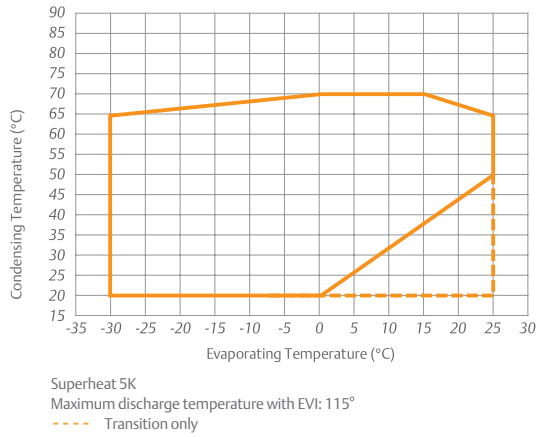


ZW166HAP, ZW188HAP

R410A

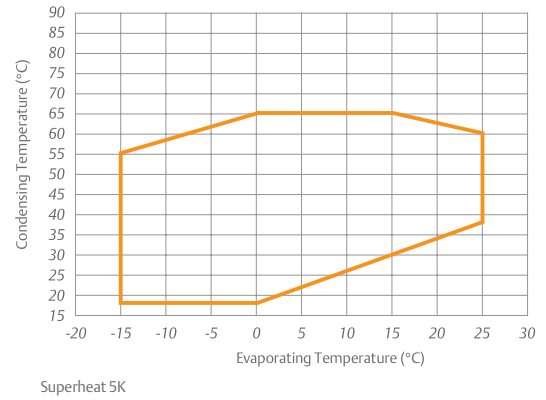


ZW30KA(E), ZW34KA(E), ZW52KA(E),  
ZW61KA(E), ZW72KA(E), ZW79KA(E),  
ZW108KA(E), ZW124KA(E), ZW125KA(E),  
ZW150KA(E), ZW57KH, ZW61KH

R22/R407C

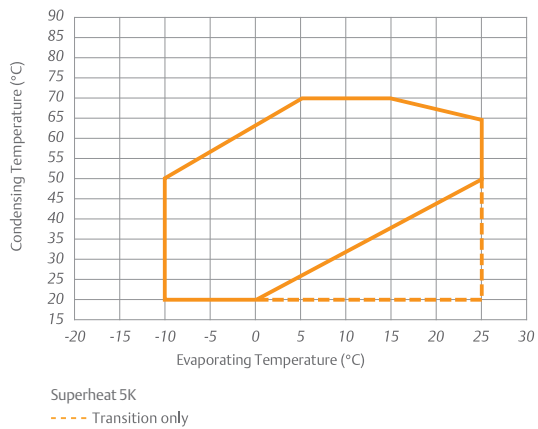


ZW28KWP, ZW31KWP, ZW42KWP,  
ZW51KWP, ZW54KWP, ZW72KWP,  
ZW83KWP

R410A

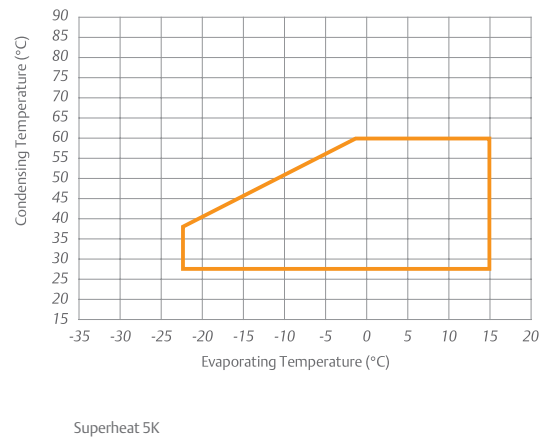

ZW102HSP, ZW430HSP-TF7

R410A

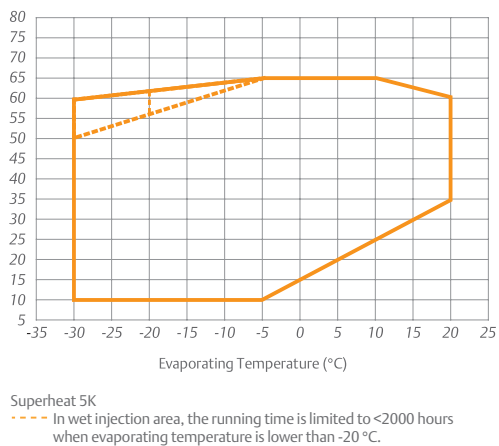

# ZW KS Heating capacity

R22 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Single phase

220V

Model		Condensing temperature °C	Evaporating temperature °C									
			-30	-25	-20	-15	-10	-5	0	5	10	15
ZW30KS	Q	65	4.62	5.20	5.85	6.57	7.36	8.25	9.22	10.30	11.48	12.78
		55	4.28	4.85	5.49	6.22	7.04	7.96	8.99	10.12	11.38	12.68
		45	4.07	4.63	5.29	6.04	6.90	7.86	8.95	10.16	11.50	12.98
		35	3.89	4.47	5.14	5.93	6.83	7.65	9.01	10.30	11.73	
		25	3.66	4.25	4.96	5.79	6.74	7.83	9.07			
	P	65	2.86	2.94	3.00	3.06	3.10	3.14	3.15	3.16	3.14	3.11
		55	2.37	2.41	2.44	2.47	2.50	2.52	2.53	2.53	2.51	2.48
		45	1.99	2.00	2.01	2.03	2.04	2.05	2.05	2.05	2.04	2.02
		35	1.68	1.67	1.66	1.67	1.68	1.68	1.69	1.70	1.70	
		25	1.39	1.37	1.36	1.36	1.36	1.38	1.40			
ZW34KS	Q	65				7.44	8.34	9.33	10.43			
		55	4.77	5.52	6.31	7.16	8.09	9.12	10.27	11.57	13.02	
		45	4.56	5.29	6.08	6.94	7.89	8.95	10.14	11.49	13.00	
		35	4.48	5.18	5.96	6.81	7.77	8.85	10.07	11.46	13.02	
		25	4.56	5.23	5.98	6.82	7.78	8.87	10.11			
	P	65				3.74	3.83	3.87	3.86			
		55	2.43	2.64	2.78	2.88	2.93	2.96	2.97	2.96	2.96	
		45	2.00	2.10	2.16	2.19	2.21	2.21	2.22	2.24	2.28	
		35	1.80	1.79	1.76	1.72	1.69	1.67	1.67	1.70	1.77	
		25	1.88	1.75	1.61	1.50	1.40	1.35	1.33			

Note: Superheat 11K, Subcooling 8.3K

EVI Controls:

DLT<115°C, Economizer superheat 6K

DLT>115°C, Adjust the injection volume to control discharge temperature ≤115°C

# ZW KS Heating capacity

R22 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C									
			-30	-25	-20	-15	-10	-5	0	5	10	15
ZW34KS	Q	65	4.92	5.64	6.42	7.26	8.16	9.14	10.20	11.35	12.60	13.96
		55	4.70	5.39	6.15	6.97	7.88	8.88	9.98	11.18	12.50	13.94
		45	4.84	5.15	5.90	6.74	7.68	8.72	9.87	11.14	12.55	14.09
		35	4.25	4.92	5.68	6.55	7.53	8.63	9.86	11.23	12.73	
		25	3.98	4.67	5.47	6.39	7.43	8.61	9.94			
	P	65	3.44	3.50	3.56	3.60	3.63	3.65	3.66	3.66	3.65	3.62
		55	2.66	2.71	2.75	2.78	2.80	2.81	2.82	2.82	2.81	2.79
		45	2.04	2.08	2.10	2.13	2.14	2.15	2.16	2.17	2.16	2.16
		35	1.56	1.58	1.60	1.62	1.64	1.65	1.66	1.67	1.68	
		25	1.18	1.20	1.21	1.23	1.25	1.27	1.29			
ZW61KS	Q	65	9.95	10.86	11.91	13.13	14.54	16.17	18.04	20.18	22.61	25.35
		55	8.85	9.91	11.12	12.51	14.09	15.90	17.95	20.28	22.90	25.84
		45	8.15	9.34	10.68	12.20	13.92	15.87	18.08	20.56	23.34	26.45
		35	7.74	9.01	10.45	12.07	13.91	15.97	18.29	20.90	23.81	
		25	7.46	8.80	10.30	12.00	12.90	16.05	18.46			
	P	65	5.79	5.82	5.88	5.95	6.03	6.10	6.17	6.22	6.23	6.21
		55	4.47	4.50	4.56	4.64	4.73	4.82	4.89	4.95	4.98	4.98
		45	3.51	3.54	3.59	3.67	3.76	3.86	3.94	4.01	4.05	4.05
		35	2.80	2.82	2.87	2.95	3.04	3.13	3.22	3.29	3.33	
		25	2.24	2.26	2.30	2.37	2.45	2.54	2.62			
ZW79KS	Q	65	12.11	13.64	15.25	16.98	18.87	20.97	23.32	25.97	28.95	32.31
		55	10.23	12.06	13.95	15.94	18.08	20.41	22.97	25.81	28.97	32.49
		45	9.24	11.26	13.32	15.48	17.75	20.21	22.87	25.80	29.03	32.60
		35	8.77	10.88	13.01	15.21	17.53	20.00	22.66	25.57	28.76	
		25	8.47	10.56	12.66	14.80	17.04	19.42	21.98			
	P	65	7.51	7.41	7.38	7.42	7.51	7.64	7.81	7.99	8.18	8.37
		55	5.86	5.80	5.82	5.88	6.00	6.14	6.31	6.48	6.65	6.81
		45	4.62	4.61	4.66	4.76	4.89	5.05	5.21	5.38	5.53	5.66
		35	8.77	10.88	13.01	15.21	17.53	20.00	22.66	25.57	28.76	
		25	2.77	2.86	2.99	3.15	3.33	3.50	3.67			
ZW108KS	Q	65		15.86	18.87	21.99	25.26	28.67	32.22	35.92	39.76	43.76
		55		15.42	18.66	21.82	25.28	28.64	32.20	35.88	39.66	43.55
		45		15.83	19.20	22.65	26.15	29.72	33.36	37.07	40.85	44.71
		35		16.23	19.90	27.31	27.31	31.05	34.83	38.64	42.48	
		25		15.75	19.77	27.76	27.76	31.74	35.72			
	P	65		9.83	10.02	10.32	10.32	10.40	10.43	10.39	10.39	10.10
		55		7.81	7.97	8.21	8.21	8.28	8.31	8.29	8.21	8.06
		45		6.33	6.45	6.64	6.64	6.71	6.74	6.73	6.68	6.56
		35		5.19	5.27	5.42	5.42	5.48	5.52	5.52	5.49	
		25		4.20	4.24	4.35	4.35	4.40	4.45			

Note: Superheat 11K, Subcooling 8.3K

EVI Controls:

DLT<115°C, Economizer superheat 6K

DLT>115°C, Adjust the injection volume to control discharge temperature ≤115°C

# ZW KS Heating capacity

R22 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C									
			-30	-25	-20	-15	-10	-5	0	5	10	15
ZW124KS	Q	65	17.86	19.98	22.53	25.52	28.92	32.74	36.95	41.55	46.54	51.90
		55	17.20	19.58	22.38	25.57	29.15	33.11	37.45	42.15	47.20	52.59
		45	17.06	19.63	22.58	25.90	29.59	33.62	38.01	42.72	47.76	53.12
		35	15.64	18.32	21.35	24.73	28.44	32.48	36.83	41.49	46.44	
		25	15.13	17.85	20.89	22.25	26.91	29.87	32.12	36.64		
	P	65	11.10	11.49	11.83	12.13	12.39	12.62	12.82	13.01	13.18	13.36
		55	8.86	9.22	9.54	9.81	10.05	10.26	10.46	10.64	10.82	11.00
		45	7.38	7.69	7.96	8.19	8.40	8.59	8.76	8.93	9.09	9.27
		35	6.13	6.38	6.59	6.77	6.93	7.07	7.21	7.34	7.48	
		25	5.59	5.76	5.90	6.02	6.11	6.20	6.29	6.37		
ZW125KS	Q	65	18.02	19.96	22.4	25.31	28.67	32.45	36.63	41.18	46.07	51.27
		55	16.9	19.15	21.86	25.02	28.6	32.57	36.91	41.58	46.58	51.86
		45	16.35	18.73	21.56	24.8	28.44	32.43	36.77	41.42	46.35	51.55
		35	15.95	18.32	21.1	24.26	27.79	31.65	35.82	40.27	44.98	
		25	15.32	17.5	20.07	22.99	26.25	29.81	33.65	37.75		
	P	65	10.74	10.87	11.04	11.24	11.46	11.7	11.95	12.21	12.46	12.71
		55	7.89	8.23	8.58	8.93	9.27	9.6	9.91	10.19	10.45	10.66
		45	6.14	6.6	7.03	7.44	7.81	8.14	8.42	8.65	8.81	8.91
		35	5.12	5.61	6.04	6.42	6.73	6.97	7.13	7.21	7.20	
		25	4.47	4.9	5.24	5.5	5.66	5.72	5.67	5.51		
ZW150KS	Q	65	19.42	23.37	27.31	31.35	35.59	40.11	45.00	50.38	56.32	62.93
		55	20.21	23.80	27.47	31.32	35.45	39.93	44.88	50.38	56.53	63.42
		45	20.04	23.41	26.94	30.73	34.87	39.45	44.58	50.33	56.82	64.13
		35	19.47	22.75	26.27	30.12	34.41	39.22	44.64	50.79	57.74	
		25	19.03	22.35	25.99	30.04	34.60	39.76	45.62	52.28		
	P	65	11.54	12.20	12.81	13.36	13.87	14.35	14.80	15.23	15.65	16.05
		55	9.62	10.15	10.64	11.09	11.53	11.94	12.34	12.74	13.14	13.55
		45	8.10	8.52	8.93	9.31	9.69	10.07	10.45	10.84	11.25	11.68
		35	6.81	7.15	7.49	7.83	8.18	8.54	8.92	9.33	9.78	
		25	5.56	5.85	6.15	6.47	6.81	7.18	7.59	8.04		

Note: Superheat 11K, Subcooling 8.3K

EVI Controls:

DLT<115°C, Economizer superheat 6K

DLT>115°C, Adjust the injection volume to control discharge temperature ≤115°C

# ZW KSE Heating capacity

R407C 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C									
			-30	-25	-20	-15	-10	-5	0	5	10	15
ZW34KSE	Q	65	5.14	5.56	6.11	6.79	7.59	8.51	9.55	10.71	11.97	13.34
		55	4.39	4.89	5.54	6.32	7.25	8.31	9.49	10.81	12.25	13.83
		45	3.90	4.46	5.17	6.04	7.06	8.23	9.54	10.99	12.58	14.31
		35	3.64	4.23	4.98	5.91	6.99	8.24	9.65	11.21	12.92	
		25	3.58	4.16	4.93	5.88	7.01	8.31	9.79			
	P	65	3.40	3.48	3.53	3.58	3.61	3.63	3.65	3.67	3.70	3.72
		55	2.52	2.60	2.65	2.70	2.73	2.75	2.78	2.80	2.88	2.86
		45	1.93	1.99	2.05	2.08	2.11	2.13	2.15	2.17	2.19	2.22
		35	1.53	1.58	1.62	1.65	1.67	1.68	1.69	1.70	1.71	
		25	1.24	1.28	1.29	1.31	1.31	1.31	1.30			
ZW61KSE	Q	65	9.05	9.90	10.93	12.14	13.56	15.20	17.07	19.20	21.59	24.27
		55	7.70	8.79	10.05	11.51	13.17	15.05	17.17	19.55	22.19	25.11
		45	6.87	8.14	9.58	11.20	13.04	15.10	17.39	19.94	22.76	25.86
		35	6.50	7.87	9.41	11.14	13.08	15.24	17.64	20.29	23.21	
		25	6.50	7.90	9.47	11.24	13.21	15.41	17.84			
	P	65	5.66	5.56	5.54	5.60	5.71	5.84	5.99	6.13	6.25	6.24
		55	4.24	4.19	4.23	4.31	4.44	4.58	4.73	4.85	4.95	4.98
		45	3.26	3.26	3.32	3.42	3.55	3.69	3.80	3.89	3.93	3.90
		35	2.59	2.60	2.67	2.77	2.88	2.99	3.07	3.02	3.08	
		25	2.08	2.10	2.16	2.23	2.31	2.37	2.39			
ZW79KSE	Q	65	11.53	13.02	14.64	16.43	18.41	20.63	23.10	25.86	28.94	32.38
		55	9.32	11.20	13.20	15.36	17.69	20.23	23.01	26.05	29.39	33.06
		45	8.15	10.27	12.51	14.88	17.41	20.11	23.03	26.19	29.62	33.36
		35	7.72	9.94	12.26	14.70	17.26	19.97	22.87	25.99	29.35	
		25	7.73	9.92	12.18	14.52	16.95	19.51	22.23			
	P	65	7.66	7.39	7.27	7.30	7.43	7.64	7.92	8.24	8.58	8.91
		55	5.80	5.65	5.63	5.72	5.88	6.11	6.37	6.64	6.89	7.11
		45	4.49	4.44	4.49	4.63	4.81	5.03	5.25	5.46	5.61	5.70
		35	8.48	10.50	12.65	14.94	17.38	19.94	22.60	25.25	27.80	
		25	2.68	2.78	2.93	3.11	3.28	3.42	3.51			
ZW108KSE	Q	65		16.37	18.58	21.24	24.33	27.81	31.69	35.94	40.54	45.48
		55		15.37	17.88	20.76	23.99	27.56	31.45	35.64	40.12	44.86
		45		13.82	16.70	19.87	23.33	27.05	31.03	35.24	39.67	44.29
		35		12.69	15.99	19.53	23.29	27.25	31.38	35.68	40.13	
		25		16.73	16.73	20.71	24.84	29.10	33.46			
	P	65		11.36	11.36	11.08	10.87	10.73	10.66	10.66	10.72	10.86
		55		8.10	8.10	8.15	8.20	8.25	8.29	8.34	8.38	8.42
		45		6.34	6.34	6.64	6.87	7.02	7.11	7.12	7.06	6.93
		35		5.35	5.35	5.83	6.16	6.34	6.39	6.29	6.05	
		25		4.43	5.00	5.00	5.35	5.49	5.42			

Note: Superheat 11K, Subcooling 8.3K

EVI Controls:

DLT<115°C, Economizer superheat 6K

DLT>115°C, Adjust the injection volume to control discharge temperature ≤115°C



# ZW KSE Heating capacity

R407C 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C									
			-30	-25	-20	-15	-10	-5	0	5	10	15
ZW124KSE	Q	65	16.57	18.44	20.99	24.17	27.91	32.14	36.81	41.85	47.19	52.78
		55	15.39	17.49	20.27	23.66	27.59	32.00	36.84	42.02	47.49	53.19
		45	14.49	16.77	19.70	23.22	27.28	31.80	36.72	41.98	47.51	53.26
		35	13.99	16.36	19.37	22.96	27.07	31.62	36.56	41.83	47.35	
		25	13.97	16.37	19.39	22.97	27.06	31.57	36.46	41.66		
	P	65	10.06	10.66	11.17	11.62	12.01	12.36	12.68	12.99	13.30	13.63
		55	7.87	8.40	8.86	9.24	9.56	9.84	10.09	10.33	10.57	10.82
		45	6.56	7.04	7.44	7.76	8.03	8.24	8.43	8.60	8.76	8.94
		35	5.48	5.91	6.26	6.53	6.74	6.89	7.02	7.12	7.22	
		25	4.95	5.34	5.64	5.86	6.02	6.12	6.19	6.23		
ZW125KSE	Q	65	16.76	18.89	21.46	24.47	27.9	31.78	36.09	40.84	46.03	51.66
		55	15.98	18.25	20.95	24.09	27.65	31.64	36.07	40.93	46.22	51.96
		45	14.84	17.25	20.08	23.34	27.02	31.14	35.68	40.65	46.05	51.89
		35	13.80	16.35	19.31	22.70	26.51	30.74	35.39	40.47	45.98	
		25	13.34	16.02	19.12	22.63	26.56	30.91	35.68	40.87		
	P	65	9.93	10.34	10.74	11.12	11.48	11.82	12.14	12.43	12.69	12.91
		55	7.96	8.30	8.64	8.96	9.26	9.54	9.80	10.04	10.25	10.43
		45	6.52	6.80	7.07	7.33	7.58	7.81	8.01	8.20	8.36	8.50
		35	5.37	5.59	5.8	6.00	6.18	6.36	6.52	6.65	6.77	
		25	4.25	4.41	4.55	4.7	4.83	4.95	5.06	5.15		

Note: Superheat 11K, Subcooling 8.3K

EVI Controls:

DLT<115°C, Economizer superheat 6K

DLT>115°C, Adjust the injection volume to control discharge temperature ≤115°C

# ZW KA Heating capacity

R22 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Single phase

220V

Model		Condensing temperature °C	Evaporating temperature °C					
			-10	-5	0	5	10	15
ZW30KA	Q	65				8.76	9.98	11.42
		55		6.49	7.76	9.03	10.37	11.87
		45	5.77	6.9	8.06	9.33	10.77	12.48
		35	6.05	7.1	8.29	9.68	11.37	
		25	6.16	7.28	8.63			
	P	65				2.83	2.92	2.97
		55		2.07	2.23	2.31	2.36	2.38
		45	1.67	1.78	1.84	1.88	1.92	1.99
		35	1.42	1.46	1.49	1.55	1.66	
		25	1.13	1.16	1.23			
ZW34KA	Q	65				9.36	10.81	12.42
		55		7.37	8.71	10.08	11.56	13.22
		45	6.64	7.95	9.26	10.64	12.16	13.91
		35	7.08	8.35	9.65	11.06	12.65	
		25	7.34	8.59	9.91			
	P	65				3.14	3.17	3.21
		55		2.64	2.64	2.64	2.66	2.68
		45	2.22	2.2	2.2	2.21	2.22	2.24
		35	1.8	1.81	1.82	1.85	1.89	
		25	1.43	1.48	1.53			
ZW52KA	Q	65				15.41	17.64	20.08
		55		11.87	13.59	15.77	18.28	21.00
		45	10.41	11.79	13.77	16.21	18.98	21.96
		35	10.50	12.12	14.33	17.00	20.00	
		25	11.28	13.11	15.53			
	P	65				5.06	5.04	5.02
		55		4.18	4.24	4.23	4.19	4.16
		45	3.44	3.58	3.62	3.58	3.52	3.47
		35	2.94	3.05	3.06	3.00	2.90	
		25	2.39	2.46	2.43			

Note: Superheat 11K, Subcooling 8.3K

# ZW KA Heating capacity

R22 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C					
			-10	-5	0	5	10	15
ZW34KA	Q	65				9.77	11.06	12.58
		55		7.75	8.81	10.10	11.59	13.28
		50	6.82	7.77	8.94	10.31	11.87	13.62
		45	8.79	7.84	9.10	10.55	12.14	13.91
		35	6.89	8.09	9.44	10.94	12.58	
		25	1.10	8.35	9.72			
	P	65				3.22	3.43	3.28
		55		2.52	2.54	2.59	2.64	2.68
		50	2.23	2.26	2.30	2.35	2.40	2.45
		45	2.00	2.04	2.09	2.14	2.19	2.23
		35	1.65	1.69	1.38	1.78	1.81	
		25	1.34	1.37	1.39			
ZW61KA	Q	65				17.53	19.86	22.61
		55		13.90	15.83	18.14	20.84	23.88
		50	12.22	13.95	16.06	18.53	21.35	24.49
		45	12.18	14.09	13.35	19.02	21.84	25.03
		35	12.38	14.54	16.98	19.69	22.64	
		25	12.76	15.01	17.48			
	P	65				5.66	5.75	5.81
		55		4.39	4.50	4.60	4.68	4.74
		50	3.85	3.97	4.07	4.16	4.24	4.30
		45	3.50	3.59	3.69	3.77	3.85	3.92
		35	2.88	2.95	3.02	3.10	3.19	
		25	2.33	2.38	2.45			
ZW72KA	Q	65				20.82	23.68	26.82
		55		16.09	18.63	21.43	24.60	28.24
		45	14.10	16.51	19.25	22.24	26.18	30.57
		35	14.42	17.10	20.32	24.15	28.72	
		25	14.95	18.17	22.11			
	P	65				6.63	6.61	6.62
		55		5.23	5.22	5.23	5.25	5.30
		45	4.12	4.14	4.16	4.19	4.23	4.30
		35	3.28	3.31	3.33	3.36	3.39	
		25	2.58	2.58	2.58			
ZW79KA	Q	65				23.92	26.45	29.3
		55		19.91	22.13	24.66	27.52	30.76
		45	18.14	20.29	22.76	25.59	28.81	32.46
		35	18.50	20.87	23.62	26.78	30.38	
		25	19.10	21.72	24.77			
	P	65				7.65	7.64	7.64
		55		6.15	6.17	6.20	6.24	6.28
		45	5.02	5.06	5.11	5.18	5.26	5.36
		35	4.20	4.26	4.34	4.44	4.57	
		25	3.53	3.60	3.72			
ZW108KA	Q	65				30.82	35.05	39.82
		55		24.20	27.81	31.91	36.56	41.80
		50	21.14	24.46	28.24	32.52	37.36	42.83
		45	21.32	24.77	28.69	33.15	38.20	43.89
		35	21.74	25.44	29.66	34.47	39.90	
		25	22.21	26.15	30.66			
	P	65				9.59	9.57	9.58
		55		7.58	7.58	7.60	7.65	7.74
		50	6.72	6.74	6.77	6.82	6.90	7.02
		45	5.99	6.03	6.08	6.14	6.25	6.40
		35	4.80	4.86	4.93	5.03	5.17	
		25	3.82	3.88	3.96			

Note: Superheat 11K, Subcooling 8.3K

# ZW KA Heating capacity

R22 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C					
			-10	-5	0	5	10	15
ZW124KA	Q	65				36.43	41.59	46.96
		55		28.14	32.29	37.18	42.70	48.75
		45	25.31	28.86	33.58	39.36	44.11	50.74
		35	25.92	29.57	34.73	39.30	45.17	
		25	27.95	30.59	35.08	40.30		
	P	65				11.27	11.50	11.75
		55		9.05	9.31	9.54	9.78	10.05
		45	7.38	7.70	7.96	8.21	8.46	8.74
		35	6.22	6.54	6.81	7.06	7.82	
		25	5.03	5.35	5.83	6.29		
ZW125KA	Q	65				35.24	40.20	45.75
		55		27.77	32.05	36.83	42.18	48.16
		45	24.74	28.80	33.34	38.42	44.09	50.41
		35	25.57	29.80	34.53	39.83	45.74	
		25	26.25	30.57	35.41	40.84		
	P	65				10.67	10.97	11.27
		55		8.43	8.75	9.03	9.31	9.63
		45	6.85	7.15	7.42	7.69	8.01	8.39
		35	5.82	6.08	6.35	6.66	7.06	
		25	4.95	5.22	5.54	5.95		
ZW150KA	Q	65				43.35	49.53	56.44
		55		34.41	39.63	45.45	51.94	59.19
		45	30.43	35.39	40.90	47.05	53.90	61.52
		35	31.17	36.44	42.30	48.81	56.06	
		25	32.61	38.23	44.47	51.40		
	P	65				13.26	13.71	14.25
		55		10.64	10.99	11.35	11.77	12.33
		45	8.71	9.08	9.41	9.79	10.25	10.88
		35	7.40	7.78	8.17	8.61	9.18	
		25	6.32	6.79	7.28	7.86		

Note: Superheat 11K, Subcooling 8.3K

# ZW KH Heating capacity

R22 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C					
			-10	-5	0	5	10	15
ZW57KH	Q	65				16.53	18.76	21.29
		55		12.97	14.92	17.11	19.59	22.40
		45	11.39	13.28	15.40	17.80	20.51	23.59
		35	11.68	13.70	15.98	18.57	21.50	
		25	12.07	14.20	16.63			
	P	65				5.3	5.31	5.34
		55		4.19	4.21	4.23	4.26	4.31
		45	3.33	3.36	3.39	3.42	3.47	3.54
		35	2.69	2.72	2.75	2.8	2.86	
		25	2.17	2.2	2.23			
ZW61KH	Q	65				17.65	20.07	22.81
		55		13.73	15.84	18.23	20.92	23.93
		45	12.03	14.07	16.38	18.98	21.87	25.09
		35	12.36	14.54	16.99	19.73	22.77	
		25	12.72	14.98	17.51			
	P	65				5.65	5.65	5.70
		55		4.48	4.47	4.48	4.53	4.62
		45	3.56	3.56	3.58	3.62	3.70	3.81
		35	2.87	2.89	2.92	2.97	3.05	
		25	2.34	2.36	2.38			

Note: Superheat 11K, Subcooling 8.3K



# ZW KAE Heating capacity

R407C 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Single phase

220V

Model		Condensing temperature °C	Evaporating temperature °C					
			-10	-5	0	5	10	15
ZW30KAE	Q	65				8.37	9.70	11.06
		55		6.32	7.54	8.75	10.04	11.47
		45	5.60	6.69	7.80	9.02	10.39	12.03
		35	5.85	6.86	8.00	9.33	10.95	
		25	5.95	7.01	8.31			
	P	65				2.84	2.95	3.00
		55		2.10	2.25	2.34	2.38	2.40
		45	1.69	1.80	1.86	1.89	1.94	2.01
		35	1.44	1.47	1.51	1.56	1.67	
		25	1.14	1.17	1.25			
ZW34KAE	Q	65				8.42	9.87	11.49
		55		6.99	8.04	9.26	10.69	12.38
		45	7.22	7.87	8.75	9.91	11.38	13.20
		35	8.00	8.44	9.22	10.37	11.93	
		25	8.42	8.72	9.44			
	P	65				3.10	3.15	3.18
		55		2.58	2.60	2.61	2.61	2.60
		45	2.28	2.25	2.21	2.17	2.15	2.13
		35	1.99	1.91	1.84	1.79	1.77	
		25	1.67	1.57	1.50			
ZW52KAE	Q	65				14.76	17.01	19.60
		55		11.31	13.12	15.30	17.85	20.76
		45	9.83	11.44	13.46	15.89	18.73	21.96
		35	10.03	11.82	14.05	16.73	19.84	
		25	10.67	12.63	15.07			
	P	65				5.18	5.19	5.18
		55		4.14	4.19	4.20	4.20	4.19
		45	3.35	3.41	3.43	3.44	3.44	3.45
		35	2.78	2.81	2.83	2.84	2.87	
		25	2.27	2.30	2.33			

Note: Superheat 11K, Subcooling 8.3K

# ZW KAE Heating capacity

R407C 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C					
			-10	-5	0	5	10	15
ZW34KAE	Q	65				9.50	10.74	12.20
		55		7.54	8.56	9.79	11.21	12.83
		50	6.63	7.54	8.66	9.98	11.47	13.14
		45	6.59	7.60	8.80	10.18	11.72	13.41
		35	6.67	7.81	9.11	10.55	12.11	
		25	6.85	8.05	9.35			
	P	65				3.22	3.27	3.30
		55		2.50	2.56	2.61	2.65	2.69
		50	2.92	2.26	2.31	2.36	2.40	2.44
		45	1.99	2.04	2.09	2.14	2.18	2.22
		35	1.63	1.67	1.72	1.76	1.81	
		25	1.32	1.36	1.39			
ZW61KAE	Q	65				17.11	18.35	21.99
		55		13.57	15.47	17.65	20.24	23.16
		50	11.92	13.59	15.62	18.00	20.71	23.72
		45	11.87	13.71	15.88	18.37	21.16	24.22
		35	12.03	14.10	16.45	19.05	21.89	
		25	12.37	14.53	16.91			
	P	65				5.72	5.81	5.87
		55		4.43	4.55	4.65	4.73	4.79
		50	3.88	4.01	4.11	4.20	4.28	4.34
		45	3.53	3.63	3.72	3.81	3.88	3.96
		35	2.91	2.98	3.05	3.14	3.23	
		25	2.35	2.41	2.48			
ZW72KAE	Q	65				20.26	23.37	27.00
		55		15.72	18.24	21.19	24.63	28.63
		45	13.78	16.14	18.92	22.17	25.95	30.33
		35	14.14	16.73	19.77	23.32	27.45	
		25	14.77	17.60	20.91			
	P	65				6.95	6.92	6.88
		55		5.41	5.42	5.42	5.41	5.39
		45	4.20	4.23	4.25	4.26	4.26	4.24
		35	3.31	3.34	3.36	3.37	3.36	
		25	2.63	2.65	2.65			
ZW79KAE	Q	65				23.34	26.88	30.78
		55		18.38	21.41	24.82	28.66	32.97
		45	16.22	19.09	22.40	26.19	30.54	35.48
		35	16.81	20.05	23.83	28.23	33.29	
		25	18.20	22.01	26.49			
	P	65				8.19	8.21	8.26
		55		6.40	6.44	6.49	6.56	6.68
		45	5.13	5.17	5.22	5.30	5.41	5.58
		35	4.17	4.20	4.25	4.34	4.48	
		25	3.21	3.21	3.25			
ZW108KAE	Q	65				29.60	33.91	38.93
		55		23.17	26.75	30.89	35.73	41.42
		50	20.22	23.50	27.24	31.61	36.75	42.81
		45	20.45	23.85	27.78	32.40	37.86	44.31
		35	20.98	24.68	29.05	34.25	40.41	
		25	21.69	25.78	30.68			
	P	65				9.59	9.58	9.60
		55		7.58	7.58	7.60	7.64	7.73
		50	6.73	6.75	6.77	6.80	6.86	6.99
		45	6.01	6.03	6.06	6.11	6.20	6.36
		35	4.85	4.88	4.92	5.00	5.14	
		25	3.97	4.00	4.06			

Note: Superheat 11K, Subcooling 8.3K

# ZW KAE Heating capacity

R407C 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C					
			-10	-5	0	5	10	15
ZW124KAE	Q	65				34.29	39.58	45.48
		55		26.39	30.98	36.14	41.95	48.49
		45	23.22	27.47	32.32	37.86	44.16	51.31
		35	24.41	28.77	33.86	39.75	46.52	
		25	26.15	30.61	35.91	42.13		
	P	65				11.50	11.73	11.93
		55		8.89	9.12	9.37	9.64	9.94
		45	7.16	7.27	7.45	7.70	8.03	8.45
		35	6.07	6.09	6.22	6.48	6.88	
		25	5.37	5.30	5.40	5.69		
ZW125KAE	Q	65				33.45	38.72	44.74
		55		25.99	30.43	35.56	41.41	48.02
		45	23.09	27.25	32.08	37.61	43.86	50.87
		35	24.15	28.51	33.54	39.26	45.72	
		25	25.05	29.41	34.45	40.19		
	P	65				10.58	11.06	11.46
		55		8.16	8.59	8.97	9.32	9.65
		45	6.74	7.00	7.26	7.53	7.83	8.19
		35	5.74	5.86	6.03	6.29	6.66	
		25	4.72	4.78	4.97	5.31		
ZW150KAE	Q	65				42.48	48.67	55.29
		55		32.12	37.97	44.39	51.40	59.01
		45	28.43	33.53	39.35	45.91	53.22	61.31
		35	31.75	36.14	41.42	47.62	54.73	
		25	37.36	40.54	44.78	50.10		
	P	65				13.21	13.77	14.33
		55		10.11	10.62	11.13	11.65	12.18
		45	8.21	8.64	9.09	9.56	10.05	10.58
		35	6.78	7.16	7.57	8.02	8.52	
		25	4.86	5.20	5.60	6.05		

Note: Superheat 11K, Subcooling 8.3K

# ZW KWP Heating capacity

R410A 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Single phase

220-240V

Model		Condensing temperature °C	Evaporating temperature °C								
			-23	-20	-15	-10	-5	0	5	10	15
ZW28KWP	Q	60						7.58	8.46	9.47	10.63
		55					6.91	7.73	8.68	9.77	11.02
		50				6.18	6.94	7.82	8.84	10.01	11.36
		45			5.46	6.14	6.95	7.88	8.97	10.22	11.66
		40		4.79	5.40	6.12	6.96	7.96	9.11	10.44	11.96
		35	4.43	4.75	5.38	6.13	7.02	8.07	9.28	10.68	12.29
		30	4.47	4.80	5.44	6.22	7.15	8.25	9.52	10.99	12.68
		27	4.54	4.87	5.53	6.33	7.28	8.40	9.71	11.23	12.96
	P	60						2.70	2.66	2.62	2.57
		55					2.46	2.42	2.38	2.34	2.28
		50				2.22	2.19	2.15	2.11	2.06	2.00
		45			1.99	1.96	1.93	1.89	1.85	1.80	1.74
		40		1.77	1.74	1.72	1.68	1.65	1.60	1.55	1.49
		35	1.56	1.55	1.52	1.50	1.47	1.43	1.38	1.33	1.26
		30	1.37	1.36	1.34	1.31	1.28	1.24	1.20	1.14	1.07
		27	1.27	1.26	1.24	1.22	1.19	1.15	1.10	1.04	0.97
ZW31KWP	Q	60						7.87	9.04	10.30	11.68
		55					6.98	8.09	9.31	10.65	12.10
		50				6.10	7.15	8.30	9.58	10.98	12.52
		45			5.26	6.23	7.31	8.51	9.84	11.31	12.93
		40		4.50	5.37	6.36	7.47	8.72	10.11	11.65	13.36
		35	4.14	4.61	5.50	6.51	7.65	8.95	10.39	12.01	13.80
		30	4.27	4.74	5.64	6.67	7.85	9.20	10.71	12.39	14.27
		27	4.36	4.83	5.74	6.79	7.99	9.36	10.91	12.64	14.57
	P	60						3.11	3.02	2.95	2.90
		55					2.76	2.68	2.61	2.56	2.54
		50				2.45	2.39	2.33	2.28	2.25	2.23
		45			2.17	2.13	2.08	2.04	2.00	1.98	1.98
		40		1.92	1.89	1.87	1.83	1.80	1.77	1.75	1.75
		35	1.67	1.68	1.67	1.65	1.62	1.59	1.57	1.55	1.55
		30	1.47	1.48	1.48	1.46	1.44	1.41	1.38	1.36	1.35
		27	1.37	1.38	1.38	1.36	1.34	1.31	1.27	1.25	1.23
ZW42KWP	Q	60						10.60	12.40	14.20	15.00
		55					9.70	10.80	12.80	14.70	15.60
		50				8.50	9.85	11.05	13.20	15.20	16.10
		45			7.35	8.60	10.00	11.30	13.55	15.70	16.60
		40		6.30	7.40	8.70	10.20	11.60	13.95	16.20	17.10
		35	5.70	6.30	7.45	8.85	10.40	11.85	14.30	16.60	17.60
		30	5.70	6.35	7.55	8.95	10.55	12.00	14.45	16.80	17.80
		27	5.80	6.45	7.65	9.10	10.75	12.25	14.75	17.10	18.20
	P	60						4.17	4.08	4.02	4.01
		55					3.69	3.63	3.55	3.51	3.50
		50				3.29	3.23	3.18	3.12	3.09	3.08
		45			2.94	2.90	2.86	2.82	2.76	2.73	2.73
		40		2.61	2.60	2.58	2.54	2.50	2.46	2.43	2.43
		35	2.30	2.31	2.32	2.29	2.26	2.23	2.18	2.16	2.15
		30	2.13	2.15	2.16	2.14	2.10	2.07	2.03	2.00	2.00
		27	1.87	1.89	1.90	1.88	1.85	1.82	1.77	1.74	1.73

Note: Superheat 11K, Subcooling 8.3K

# ZW KWP Heating capacity

R410A 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Single phase

220-240V

Model		Condensing temperature °C	Evaporating temperature °C								
			-23	-20	-15	-10	-5	0	5	10	15
ZW51KWP	Q	60						12.60	14.80	16.90	17.80
		55					11.50	12.85	15.20	17.40	18.40
		50				10.15	11.75	13.15	15.60	18.00	19.10
		45			8.80	10.30	11.95	13.50	16.10	18.60	19.70
		40		7.55	8.90	10.45	12.20	13.80	16.50	19.20	20.40
		35	6.90	7.65	9.05	10.65	12.50	14.15	17.00	19.80	21.00
		30	6.95	7.70	9.15	10.75	12.65	14.35	17.30	20.20	21.40
		27	7.05	7.80	9.30	10.95	12.95	14.70	17.80	20.80	22.10
	P	60						4.75	4.67	4.61	4.59
		55					4.23	4.18	4.12	4.08	4.07
		50				3.78	3.73	3.70	3.65	3.63	3.62
		45			3.37	3.34	3.30	3.28	3.25	3.23	3.23
		40		3.00	2.99	2.96	2.94	2.92	2.90	2.89	2.89
		35	2.67	2.67	2.66	2.64	2.62	2.60	2.58	2.58	2.58
		30	2.49	2.49	2.48	2.47	2.45	2.43	2.41	2.41	2.40
		27	2.23	2.23	2.22	2.21	2.19	2.17	2.15	2.13	2.13

Note: Superheat 11K, Subcooling 8.3K



# ZW KWP Heating capacity

R410A 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380-420V

Model		Condensing temperature °C	Evaporating temperature °C								
			-23	-20	-15	-10	-5	0	5	10	15
ZW42KWP	Q	60						10.90	12.44	14.11	15.98
		55					9.67	11.12	12.71	14.48	16.48
		50				8.45	9.81	11.30	12.97	14.86	17.01
		45			7.26	8.53	9.92	11.48	13.26	15.28	17.60
		40		6.14	7.31	8.59	10.04	11.70	13.60	15.78	18.30
		35	5.53	6.18	7.35	8.68	10.20	11.97	14.02	16.40	19.14
		30	5.57	6.22	7.42	8.81	10.44	12.35	14.57	17.16	20.14
		27	5.60	6.26	7.49	8.94	10.64	12.64	14.97	17.69	20.84
	P	60						4.10	3.98	3.88	3.77
		55					3.66	3.56	3.47	3.38	3.29
		50				3.27	3.18	3.10	3.03	2.96	2.88
		45			2.93	2.85	2.78	2.72	2.66	2.59	2.53
		40		2.63	2.55	2.49	2.44	2.39	2.34	2.28	2.23
		35	2.33	2.29	2.24	2.19	2.14	2.10	2.06	2.01	1.96
		30	2.04	2.01	1.96	1.93	1.89	1.86	1.82	1.77	1.72
		27	1.88	1.86	1.82	1.79	1.75	1.72	1.68	1.64	1.59
ZW54KWP	Q	60						13.62	15.63	17.95	20.62
		55					12.02	13.90	16.06	18.56	21.41
		50				10.47	12.22	14.23	16.54	19.19	22.21
		45			8.99	10.61	12.47	14.59	17.03	19.81	22.99
		40		7.59	9.09	10.79	12.74	14.96	17.50	20.41	23.72
		35	6.84	7.68	9.23	10.99	13.00	15.31	17.94	20.95	24.38
		30	6.94	7.79	9.37	11.17	13.24	15.61	18.32	21.42	24.95
		27	7.00	7.86	9.45	11.27	13.35	15.76	18.51	21.65	25.23
	P	60						5.07	4.99	4.92	4.88
		55					4.49	4.42	4.37	4.32	4.29
		50				3.97	3.92	3.87	3.83	3.80	3.78
		45			3.50	3.46	3.42	3.39	3.36	3.34	3.33
		40		3.07	3.05	3.03	3.00	2.97	2.95	2.94	2.93
		35	2.69	2.69	2.67	2.66	2.63	2.61	2.59	2.57	2.56
		30	2.36	2.36	2.35	2.33	2.31	2.28	2.25	2.23	2.22
		27	2.18	2.18	2.17	2.15	2.13	2.10	2.06	2.04	2.01
ZW72KWP	Q	60						18.37	20.85	23.69	26.92
		55					16.46	18.77	21.42	24.44	27.88
		50				14.60	16.75	19.21	22.02	25.22	28.86
		45			12.83	14.81	17.08	19.67	22.64	26.02	29.84
		40		11.17	12.97	15.30	17.42	20.15	23.27	26.82	30.84
		35	10.25	11.26	13.13	15.30	17.79	20.65	23.92	27.63	31.83
		30	10.34	11.37	13.32	15.57	18.16	21.15	24.56	28.44	32.82
		27	10.39	11.45	13.43	15.73	18.39	21.45	24.94	28.92	33.40
	P	60						6.48	6.48	6.48	6.46
		55					5.73	5.75	5.75	5.75	5.74
		50				5.08	5.09	5.10	5.11	5.11	5.11
		45			4.50	4.52	4.53	4.54	4.55	4.55	4.56
		40		4.00	4.01	4.02	4.03	4.05	4.06	4.07	4.09
		35	3.56	3.57	3.57	3.58	3.59	3.61	3.63	3.65	3.68
		30	3.18	3.18	3.18	3.19	3.21	3.23	3.26	3.29	3.34
		27	2.96	2.96	2.97	2.98	2.99	3.02	3.05	3.10	3.15

Note: Superheat 11K, Subcooling 8.3K

## ZW KWP Heating capacity

R410A 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380-420V

Model		Condensing temperature °C	Evaporating temperature °C								
			-23	-20	-15	-10	-5	0	5	10	15
ZW83KWP	Q	60						21.12	24.10	27.55	31.54
		55					18.82	21.55	24.72	28.38	32.58
		50				16.62	19.14	22.05	25.39	29.24	33.65
		45			14.54	16.87	19.53	22.59	26.10	30.12	34.72
		40		12.57	14.73	17.18	19.97	23.16	26.82	31.00	35.76
		35	11.49	12.72	14.97	17.52	20.42	23.74	27.53	31.85	36.77
		30	11.64	12.91	15.24	17.87	20.87	24.29	28.20	32.65	37.71
		27	11.75	13.04	15.40	18.08	21.13	24.61	28.58	33.10	38.23
	P	60						7.35	7.33	7.33	7.35
		55					6.50	6.50	6.50	6.52	6.56
		50				5.74	5.75	5.76	5.78	5.82	5.88
		45			5.06	5.08	5.09	5.11	5.15	5.20	5.28
		40		4.44	4.47	4.49	4.51	4.55	4.60	4.66	4.76
		35	3.90	3.92	3.95	3.98	4.01	4.05	4.11	4.19	4.30
		30	3.43	3.45	3.48	3.52	3.55	3.60	3.67	3.77	3.89
		27	3.18	3.20	3.23	3.26	3.30	3.36	3.43	3.53	3.67

Note: Superheat 11K, Subcooling 8.3K

## ZW HAP Heating capacity

R410A 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C								
			-15	-10	-5	0	5	10	15	20	25
ZW166HAP	Q	65				14.01	15.78	17.82	20.17		
		60			12.50	14.25	16.21	18.40	20.90	23.80	27.18
		55	9.20	10.94	12.68	14.57	16.64	18.97	21.65	24.77	28.41
		50	9.30	11.09	12.92	14.88	17.05	19.52	22.38	25.72	29.63
		45	9.54	11.31	13.17	15.18	17.45	20.06	23.10	26.66	30.82
		40	9.78	11.53	13.41	15.48	17.85	20.60	23.81	27.58	31.99
		35	10.02	11.75	13.65	15.78	18.24	21.12	24.51	28.49	32.64
		30	10.26	11.98	13.88	16.07	18.62	21.64	24.81		
	P	65				5.40	5.36	5.39	5.51		
		60			4.71	4.73	4.78	4.79	4.78	4.74	4.69
		55	3.84	4.09	4.15	4.21	4.24	4.25	4.23	4.19	4.13
		50	3.51	3.62	3.70	3.75	3.77	3.77	3.74	3.70	3.64
		45	3.15	3.25	3.31	3.35	3.37	3.36	3.33	3.29	3.23
		40	2.85	2.94	3.00	3.03	3.04	3.02	2.99	2.95	2.89
		35	2.63	2.71	2.76	2.78	2.79	2.77	2.74	2.70	3.26
		30	2.49	2.56	2.60	2.62	2.63	2.61	2.76		
* ZW188HAP	Q	65				15.32	17.36	19.70	22.36		
		60			13.74	15.66	17.85	20.35	23.19	26.38	29.97
		55	10.68	12.24	14.03	16.08	18.42	21.07	24.07	27.44	31.22
		50	10.81	12.47	14.38	16.55	19.03	21.83	24.99	28.53	32.48
		45	10.99	12.75	14.77	17.06	19.67	22.61	25.92	29.62	33.74
		40	11.21	13.06	15.17	17.58	20.31	23.38	26.83	30.69	34.97
		35	11.42	13.35	15.56	18.06	20.90	24.09	27.68	31.34	35.49
		30	11.63	13.64	15.94	18.54	21.49	24.81	28.52		
	P	65				6.07	6.17	6.24	6.27		
		60			5.34	5.43	5.50	5.55	5.56	5.52	5.42
		55	4.67	4.72	4.78	4.84	4.90	4.93	4.93	4.89	4.79
		50	4.21	4.24	4.28	4.32	4.36	4.39	4.38	4.34	4.25
		45	3.79	3.80	3.83	3.87	3.90	3.92	3.92	3.88	3.80
		40	3.41	3.41	3.43	3.47	3.50	3.53	3.54	3.51	3.44
		35	3.09	3.08	3.11	3.15	3.19	3.24	3.26	3.23	3.17
		30	2.76	2.76	2.78	2.83	2.89	2.94	2.99		

Note: Superheat 11K, Subcooling 8.3K

\* Preliminary data

## ZW HSP Heating capacity

R410A 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C										
			-30	-25	-20	-15	-10	-5	0	5	10	15	20
ZW102HSP	Q	65						15.63	17.15	18.88	20.80		
		60	10.40	10.93	11.71	12.73	13.97	15.42	17.07	18.91	20.92	23.09	25.40
		50	8.88	9.73	10.81	12.08	13.55	15.20	17.01	18.97	21.07	23.29	25.63
		40	8.01	9.07	10.32	11.73	13.31	15.02	16.87	18.83	20.90	23.06	25.29
		30	7.57	8.72	10.02	11.45	13.01	14.67	16.43	18.27	20.19	22.16	
	P	65						6.03	5.92	5.90	5.98		
		60	6.75	6.25	5.86	5.57	5.38	5.28	5.27	5.35	5.50	5.73	6.02
		50	4.68	4.42	4.24	4.14	4.12	4.18	4.31	4.50	4.75	5.05	5.40
		40	3.37	3.25	3.20	3.21	3.29	3.41	3.59	3.81	4.07	4.36	4.68
		30	2.57	2.52	2.51	2.55	2.63	2.74	2.89	3.05	3.24	3.44	

Note: Superheat 11K, Subcooling 8.3K

EVI Controls:

DLT<115°C, Economizer superheat 6K

DLT>115°C, Adjust the injection volume to control discharge temperature ≤115°C

## ZW KS Heating capacity

R22 60 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C									
			-30	-25	-20	-15	-10	-5	0	5	10	15
ZW34KS	Q	65	7.36	7.42	7.88	8.68	9.74	11.01	12.41	13.88	15.34	16.72
		55	6.22	6.46	7.08	8.01	9.18	10.52	11.97	13.46	14.92	16.28
		45	5.72	6.12	6.86	7.89	9.14	10.53	12.00	13.48	14.91	16.22
		35	5.39	5.9	6.74	7.84	9.13	10.54	12.00	13.45	14.82	
		25	4.72	5.33	6.23	7.37	8.67	10.07	11.49			
	P	65	3.93	3.82	3.78	3.81	3.89	4.00	4.12	4.24	4.35	4.42
		55	3.23	3.13	3.09	3.11	3.16	3.23	3.30	3.37	3.40	3.39
		45	2.63	2.54	2.52	2.53	2.57	2.61	2.65	2.66	2.64	2.55
		35	2.09	2.04	2.04	2.06	2.09	2.13	2.14	2.12	2.04	
		25	1.61	1.60	1.63	1.68	1.72	1.75	1.75			
ZW108KS	Q	65		20.94	23.88	27.10	30.60	34.42	38.54	43.00	47.81	54.04
		55		18.34	22.05	25.91	29.93	34.14	38.54	43.14	47.96	54.06
		45		19.40	23.62	27.86	32.15	36.49	40.91	45.40	49.98	55.63
		35		21.03	25.50	29.87	34.16	38.39	42.55	46.67	50.77	
		25		20.12	24.58	28.83	32.87	36.71	40.38			
	P	65		10.76	11.44	11.96	12.31	12.52	12.59	12.54	12.38	12.05
		55		9.06	9.51	9.83	10.03	10.13	10.12	10.03	9.86	9.58
		45		7.70	7.97	8.14	8.22	8.24	8.20	8.11	7.98	7.80
		35		6.48	6.59	6.65	6.67	6.66	6.62	6.58	6.53	
		25		5.17	5.19	5.18	5.18	5.17	5.18			

Note: Superheat 11K, Subcooling 8.3K

EVI Controls:

DLT<115°C, Economizer superheat 6K

DLT>115°C, Adjust the injection volume to control discharge temperature ≤115°C

# ZW KSE Heating capacity

R407C 60 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C									
			-30	-25	-20	-15	-10	-5	0	5	10	15
ZW34KSE	Q	65	7.29	7.28	7.51	8.12	9.05	10.24	11.61	13.12	14.70	16.27
		55	5.69	5.83	6.37	7.26	8.43	9.83	11.39	13.04	14.73	16.38
		45	4.80	5.20	5.97	7.06	8.40	9.92	11.58	13.29	15.01	16.66
		35	4.37	4.94	5.86	7.07	8.49	10.06	11.73	13.43	15.09	
		25	3.93	4.61	5.60	6.83	8.25	9.80	11.40			
	P	65	3.96	3.80	3.72	3.71	3.74	3.81	3.89	3.98	4.05	4.10
		55	3.12	3.03	3.01	3.04	3.10	3.18	3.27	3.34	3.38	3.38
		45	2.44	2.41	2.42	2.47	2.54	2.61	2.66	2.69	2.68	2.61
		35	2.02	2.01	2.04	2.08	2.12	2.16	2.16	2.13	2.04	
		25	1.84	1.83	1.84	1.85	1.85	1.86	1.81			
ZW61KSE	Q	65	11.03	12.07	13.32	14.80	16.52	18.52	20.81	23.40	26.32	29.59
		55	9.38	10.71	12.26	14.03	16.05	18.35	20.93	23.83	27.05	30.61
		45	8.38	9.92	11.67	13.66	15.89	18.40	21.20	24.30	27.74	31.52
		35	7.93	9.59	11.47	13.58	15.94	18.58	21.50	24.73	28.30	
		25	7.93	9.63	11.55	13.70	16.10	18.78	21.74			
	P	65	6.91	6.79	6.78	6.84	6.97	7.14	7.32	7.50	7.64	7.73
		55	5.19	5.13	5.17	5.28	5.43	5.61	5.78	5.94	6.04	6.08
		45	3.99	3.99	4.06	4.18	4.34	4.50	4.65	4.76	4.81	4.78
		35	3.17	3.19	3.28	3.40	3.53	3.66	3.76	3.80	3.77	
		25	2.55	2.58	2.65	2.74	2.84	2.91	2.93			
ZW108KSE	Q	65		19.96	23.13	26.23	29.44	32.94	36.90	41.52	46.96	53.40
		55		17.75	21.32	28.89	28.64	32.75	37.41	42.78	49.05	56.41
		45		18.34	21.86	25.46	29.31	33.59	38.49	44.18	50.84	58.65
		35		19.32	22.35	25.53	29.04	33.05	37.74	43.31	49.91	
		25		18.30	20.40	22.71	25.43	28.72	32.78			
	P	65		12.27	12.35	12.41	12.47	12.53	12.60	12.69	12.79	12.93
		55		9.61	9.70	9.79	9.88	9.97	10.07	10.19	10.33	10.50
		45		7.86	7.90	7.94	7.98	8.03	8.10	8.18	8.29	8.44
		35		6.62	6.55	6.47	6.40	6.34	6.29	6.27	6.28	
		25		5.50	5.24	4.97	4.72	4.48	4.26			

Note: Superheat 11K, Subcooling 8.3K

EVI Controls:

DLT<115°C, Economizer superheat 6K

DLT>115°C, Adjust the injection volume to control discharge temperature ≤115°C

## ZW KA Heating capacity

R22 60 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C					
			-10	-5	0	5	10	15
ZW61KA	Q	65				20.70	23.86	27.72
		55		16.09	18.92	21.86	25.06	28.63
		45	14.40	16.98	19.71	22.74	26.18	30.16
		35	14.96	17.48	20.33	23.64	27.53	
		25	15.25	17.93	21.11			
	P	65				6.96	7.11	7.12
		55		5.28	5.55	5.69	5.75	5.77
		45	4.22	4.40	4.52	4.61	4.69	4.82
		35	3.51	3.57	3.66	3.79	4.02	
		25	2.83	2.89	3.04			

Note: Superheat 11K, Subcooling 8.3K

## ZW KAE Heating capacity

R407C 60 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C					
			-10	-5	0	5	10	15
ZW61KAE	Q	65				20.55	23.24	26.42
		55		16.30	18.52	21.20	24.30	27.82
		45	14.24	16.44	19.05	22.04	25.39	29.08
		35	14.42	16.92	19.74	22.88	26.30	
		25	14.91	17.53	20.40			
	P	65				6.88	6.99	7.06
		55		5.33	5.47	5.58	5.67	5.75
		45	4.22	4.34	4.45	4.55	4.65	4.74
		35	3.47	3.56	3.65	3.76	3.89	
		25	2.89	2.97	3.08			

Note: Superheat 11K, Subcooling 8.3K



# ZW KWP Heating capacity

R410A 60 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

460V

Model		Condensing temperature °C	Evaporating temperature °C								
			-23	-20	-15	-10	-5	0	5	10	15
ZW42KWP	Q	60						13.27	15.14	17.19	19.44
		55					11.77	13.54	15.49	17.65	20.07
		50				10.29	11.96	13.79	15.84	18.14	20.73
		45			8.88	10.43	12.13	14.05	16.21	18.67	21.46
		40		7.58	8.98	10.54	12.31	14.33	16.63	19.26	22.27
		35	6.90	7.66	9.06	10.67	12.51	14.65	17.11	19.94	23.18
		30	6.97	7.72	9.15	10.81	12.76	15.03	17.67	20.71	24.21
		27	7.00	7.76	9.21	10.92	12.93	15.30	18.05	21.24	24.90
	P	60						4.90	4.77	4.65	4.52
		55					4.39	4.28	4.17	4.07	3.96
		50				3.94	3.83	3.74	3.65	3.57	3.48
		45			3.53	3.44	3.36	3.29	3.21	3.14	3.07
		40		3.18	3.09	3.02	2.96	2.90	2.84	2.78	2.72
		35	2.84	2.79	2.72	2.66	2.61	2.57	2.52	2.48	2.42
		30	2.49	2.45	2.40	2.35	2.32	2.28	2.25	2.21	2.16
		27	2.31	2.27	2.23	2.19	2.16	2.13	2.10	2.07	2.03
ZW54KWP	Q	60						16.95	19.28	21.93	24.94
		55					15.17	17.33	19.78	22.58	25.79
		50				13.43	15.44	17.70	20.29	23.25	26.67
		45			11.76	13.61	15.70	18.08	20.82	23.97	27.61
		40		10.17	11.88	13.80	15.98	18.49	21.40	24.76	28.64
		35	9.30	10.26	12.02	14.01	16.30	18.97	22.06	25.64	29.78
		30	9.40	10.38	12.19	14.27	16.70	19.52	22.82	26.64	31.06
		27	9.47	10.46	12.31	14.46	16.98	19.91	23.33	27.31	31.90
	P	60						5.93	5.84	5.77	5.73
		55					5.29	5.21	5.15	5.10	5.08
		50				4.72	4.65	4.60	4.55	4.53	4.52
		45			4.20	4.15	4.11	4.07	4.04	4.02	4.02
		40		3.73	3.71	3.68	3.64	3.62	3.60	3.58	3.58
		35	3.03	3.30	3.29	3.27	3.25	3.22	3.20	3.18	3.17
		30	2.66	2.94	2.93	2.92	2.89	2.87	2.84	2.81	2.79
		27	2.46	2.74	2.74	2.72	2.70	2.67	2.63	2.60	2.56
ZW72KWP	Q	60						22.67	25.64	29.03	32.92
		55					20.38	23.15	26.30	29.91	34.04
		50				18.14	20.72	23.64	26.98	30.81	35.20
		45			15.99	18.38	21.08	24.15	27.68	31.74	36.39
		40		13.95	16.16	18.64	21.46	24.69	28.41	32.70	37.61
		35	12.83	14.08	16.34	18.91	21.86	25.26	29.18	33.69	38.87
		30	12.96	14.23	16.55	19.22	22.30	25.86	29.98	34.73	40.18
		27	13.05	14.33	16.69	19.42	22.57	26.24	30.48	35.37	40.99
	P	60						7.62	7.64	7.66	7.66
		55					6.78	6.82	6.84	6.86	6.87
		50				6.04	6.08	6.11	6.13	6.16	6.18
		45			5.37	5.42	5.46	5.48	5.51	5.54	5.58
		40		4.76	4.82	4.86	4.89	4.92	4.95	5.00	5.06
		35	4.24	4.28	4.32	4.36	4.38	4.41	4.46	4.52	4.61
		30	3.81	3.83	3.87	3.89	3.92	3.96	4.02	4.10	4.22
		27	3.56	3.58	3.61	3.63	3.66	3.71	3.78	3.88	4.02
ZW83KWP	Q	60						26.00	29.39	33.32	37.87
		55					23.41	26.52	30.13	34.30	39.09
		50				20.94	23.81	27.12	30.93	35.31	40.33
		45			18.60	21.25	24.28	27.77	31.76	36.34	41.57
		40		16.38	18.84	21.62	24.80	28.44	32.60	37.36	42.79
		35	15.16	16.57	19.13	22.03	25.34	29.11	33.43	38.35	43.95
		30	15.36	16.81	19.46	22.45	25.87	29.77	34.22	39.28	45.04
		27	15.49	16.96	19.66	22.71	26.18	30.14	34.66	39.81	45.65
	P	60						8.68	8.67	8.67	8.69
		55					7.76	7.75	7.76	7.78	7.82
		50				6.92	6.93	6.94	6.96	7.00	7.07
		45			6.17	6.19	6.21	6.23	6.27	6.33	6.42
		40		5.50	5.52	5.55	5.58	5.61	5.66	5.74	5.85
		35	4.90	4.92	4.95	4.98	5.02	5.06	5.13	5.22	5.34
		30	4.39	4.41	4.45	4.48	4.52	4.58	4.65	4.76	4.89
		27	4.11	4.13	4.17	4.20	4.25	4.31	4.39	4.50	4.64

Note: Superheat 11K, Subcooling 8.3K

# Specifications 50 Hz

## ZW KS

R22

ZW Series		ZW30KS	ZW34KS	ZW34KS	ZW61KS	ZW79KS	ZW108KS	ZW124KS	ZW125KS	ZW150KS
Nominal power	HP	2.5	3	3	5	7	9	10	10	13
Motor type		PFS			TFP					
Displacement	m³/hr	7.1	8.0	8.0	14.4	18.8	24.9	29.2	29.1	35.3
Refrigerant		R22								
Heating capacity	kW	10.1	11.6	11.2	20.3	25.8	35.9	42.62	41.6	50.4
Input power	kW	2.5	3.0	2.8	5.0	6.5	8.3	10.59	10.2	12.7
Current	A	11.5	13.7	5.0	8.5	11.9	16.1	21.42	18.6	24.8
Mass flow	g/s	43.5	47.8	48.2	88.2	110.6	154.0	174.8	173.5	210.4
Locked rotor amps	A	58.4	72.5	31.6	59.0	90.5	133.0	155	133.0	157
Rated load current	A	13.6	13.9	6.4	10.1	12.1	19.3	20.4	20.1	25.6
Max continuous current	A	19.0	19.4	8.9	14.2	17.0	27.0	28.6	28.1	35.8
Max operating current	A	17.2	17.7	7.0	11.8	13.6	20.5	26.8	27.2	31.5
Oil charge	Initial	L	0.74	0.74	0.74	1.57	1.89	3.25	3.25	3.37
	Replacement refill	L	0.62	0.62	0.62	1.45	1.77	3.14	3.14	3.25
Net weight	kg	22	22	22	30	41	60	62	60	65

Conditions: ET 5 °C, CT 55 °C, Superheat 11K Subcooling 8.3K

## ZW KSE

R407C

ZW Series		ZW34KSE	ZW61KSE	ZW79KSE	ZW108KSE	ZW124KSE	ZW125KSE
Nominal power	HP	3	5	7	9	10	10
Motor type		TFP					
Displacement	m³/hr	8.0	14.4	18.8	24.9	29.2	29.1
Refrigerant		R407C					
Heating capacity	kW	10.8	19.6	26.1	35.6	41.76	40.9
Input power	kW	2.8	4.9	6.6	8.3	10.41	10.0
Current	A	5.0	8.4	12.3	16.6	21.17	18.5
Mass flow	g/s	43.8	81.6	121.4	146.8	167.9	166.3
Locked rotor amps	A	31.6	59.0	90.5	133.0	155	133.0
Rated load current	A	6.6	10.2	14.6	20.6	21.3	21.0
Max continuous current	A	9.3	14.3	20.5	28.8	29.8	29.4
Max operating current	A	7.1	12.6	14.6	21.0	28.13	25.2
Oil charge	Initial	L	0.74	1.57	1.77	3.25	3.25
	Replacement refill	L	0.62	1.45	1.66	3.14	3.14
Net weight	kg	22	30	39	60	62	60

Conditions: ET 5 °C, CT 55 °C, Superheat 11K Subcooling 8.3K

## ZW KA

## R22

ZW Series		ZW34KA	ZW61KA	ZW72KA	ZW79KA	ZW108KA	ZW124KA	ZW125KA	ZW150KA
Nominal power	HP	3	5	6	7	9	10	10	13
Motor type		TFP							
Displacement	m³/hr	8.0	14.4	17.1	18.8	24.9	29.2	29.1	35.3
Refrigerant		R22							
Heating capacity	kW	10.1	18.1	21.4	24.7	31.2	37.21	36.8	45.41
Input power	kW	2.6	4.6	5.2	6.2	7.6	9.55	9.0	11.3
Current	A	4.5	8.2	9.1	11.5	13.7	20.2	17.1	23
Mass flow	g/s	48.0	87.1	103.0	118.4	154.0	176.2	177.0	218
Locked rotor amps	A	31.6	59.0	67.0	100.0	100.0	155	133.0	157
Rated load current	A	6.4	10.1	10.0	12.1	17.3	20.8	20.1	25.7
Max continuous current	A	8.9	14.2	14.0	17.0	24.2	29.1	28.2	36
Max operating current	A	7.0	11.8	12.1	16.0	16.8	24.18	27.2	28.5
Oil charge	Initial	L	0.74	1.57	1.77	1.89	3.25	3.25	3.37
	Replacement refill	L	0.62	1.45	1.66	1.77	3.14	3.14	3.25
Net weight	kg	22	30	39	41	60	62	60	65

Conditions: ET 5°C, CT 55°C, Superheat 11K Subcooling 8.3K

## ZW KA

## R22

ZW Series		ZW30KA	ZW34KA	ZW52KA
Nominal power	HP	2.5	3	4.5
Motor type		PFS		
Displacement	m³/hr	7.1	8.0	12.2
Refrigerant		R22		
Heating capacity	kW	9.0	10.1	15.8
Input power	kW	2.3	2.6	4.2
Current	A	10.7	12.2	22.9
Mass flow	g/s	43.0	46.0	74.0
Locked rotor amps	A	58.4	72.5	136.0
Rated load current	A	13.6	12.6	26.4
Max continuous current	A	19.0	17.7	36.9
Max operating current	A	17.2	16.7	28.2
Oil charge	Initial	L	0.74	1.57
	Replacement refill	L	0.62	1.45
Net weight	kg	22	22	30

Conditions: ET 5°C, CT 55°C, Superheat 11K Subcooling 8.3K

## ZW KH

## R22

ZW Series		ZW57KH	ZW61KH
Nominal power	HP	5	5
Motor type		TFP	
Displacement	m³/hr	13.4	14.4
Refrigerant		R22	
Heating capacity	kW	17.1	18.2
Input power	kW	4.2	4.5
Current	A	7.4	7.9
Mass flow	g/s	81.9	87.4
Locked rotor amps	A	64.0	67.0
Rated load current	A	9.0	10.1
Max continuous current	A	12.6	14.2
Max operating current	A	9.6	10.5
Oil charge	Initial	L	1.95
	Replacement refill	L	1.83
Net weight	kg	39	40

Conditions: ET 5°C, CT 55°C, Superheat 11K Subcooling 8.3K

# Specifications 50 Hz

## ZW KAE

## R407C

ZW Series		ZW30KAE	ZW34KAE	ZW52KAE	ZW34KAE	ZW61KAE	ZW72KAE	ZW79KAE	ZW108KAE	ZW124KAE	ZW125KAE	ZW150KAE
Nominal power	HP	2.5	3	4.5	3	5	6	7	9	10	10	13
Motor type		PFS			TFP							
Displacement	m³/hr	7.1	8.0	12.2	8.0	14.4	17.1	18.8	24.9	29.2	29.1	35.3
Refrigerant		R407C										
Heating capacity	kW	8.8	9.3	15.3	9.8	17.7	21.2	24.8	30.9	36.02	35.6	44.24
Input power	kW	2.3	2.6	4.2	2.6	4.7	5.4	6.5	7.6	9.35	9.0	11.1
Current	A	10.8	11.9	22.6	4.5	8.1	9.5	12.0	13.9	20.1	17.2	22.6
Mass flow	g/s	44.0	41.7	70.0	44.0	89.0	99.1	115.7	147.0	168.9	168.0	206.6
Locked rotor amps	A	58.4	72.5	136.0	31.6	59.0	67.0	100.0	100.0	155	133.0	157
Rated load current	A	15.3	13.1	27.1	6.6	10.2	10.0	12.1	17.3	21.6	21.3	26.4
Max continuous current	A	21.4	18.3	38.0	9.3	14.3	14.0	17.0	24.2	30.2	29.8	37
Max operating current	A	17.7	17.0	29.3	7.1	12.6	12.1	15.0	16.8	24.63	25.2	28.5
Oil charge	Initial	L	0.74	0.74	1.57	0.74	1.57	1.77	1.89	3.25	3.25	3.37
	Replacement refill	L	0.62	0.62	1.45	0.62	1.45	1.66	1.77	3.14	3.2	3.25
Net weight	kg	22	22	30	22	30	39	41	60	62	60	65

Conditions: ET 5 °C, CT 55 °C, Superheat 11K Subcooling 8.3K

## ZW KWP

## R410A

ZW Series		ZW28KWP	ZW31KWP	ZW42KWP	ZW51KWP	ZW42KWP	ZW54KWP	ZW72KWP	ZW83KWP
Nominal power	HP	2.5	3	3.5	4.5	3.5	4.5	6	7
Motor type		PFZ				TFD			
Displacement	m³/hr	4.6	5.1	6.9	8.4	6.9	8.9	11.7	13.4
Refrigerant		R410A							
Heating capacity	kW	8.7	9.3	12.8	15.2	12.7	16.1	21.4	24.7
Input power	kW	2.4	2.6	3.6	4.1	3.5	4.4	5.8	6.5
Current	A	11.0	12.1	17.0	20.2	5.7	7.1	9.9	11.8
Mass flow	g/s	55.6	59.6	58.8	97.3	58.4	75.1	137.2	158.3
Locked rotor amps	A	53.0	67.0	128.0	126.0	43.0	51.5	75.0	101.0
Rated load current	A	11.4	15.0	21.7	22.5	6.8	8.6	12.5	13.6
Max continuous current	A	16.0	21.0	30.4	31.5	9.5	12.1	17.5	19.0
Max operating current	A	13.7	17.1	26.0	28.0	8.0	10.3	16.0	15.0
Oil charge	Initial	L	0.77	0.74	1.24	1.24	1.24	1.77	1.77
	Replacement refill	L	0.65	0.62	1.12	1.12	1.12	1.66	1.66
Net weight	kg	20	23	33	34	33	33	40	40

Conditions: ET 5 °C, CT 55 °C, Superheat 11K Subcooling 8.3K

ZW Series			ZW102HSP	ZW166HAP	*ZW188HAP
Nominal power	HP		4.5	4.5	5
Motor type			TFP		
Displacement	m <sup>3</sup> /hr		8.9	8.9	10.1
Refrigerant			R410A		
Heating capacity	kW		18.9	16.6	18.4
Input power	kW		4.9	4.2	4.9
Current	A		8.2	7.6	8.7
Mass flow	g/s		76.0	78.7	89.6
Locked rotor amps	A		70.0	62.0	74
Rated load current	A		9.0	8.1	11.1
Max continuous current	A		12.6	11.3	14.8
Max operating current	A		11.0	9.7	11.9
Oil charge	Initial	L	1.56	1.56	1.89
	Replacement refill	L	1.44	1.44	1.77
Net weight	kg		33	32	40.3

Conditions: ET 5 °C, CT 55 °C, Superheat 11K Subcooling 8.3K

\*Preliminary data

# Specifications 60 Hz

ZW KS(E) ZW KA(E)

R22/R407C

ZW Series		ZW34KS	ZW34KSE	ZW61KSE	ZW108KS	ZW108KSE	ZW61KA	ZW61KAE
Nominal power	HP	3	3	5	9	9	5	5
Motor type		TF7						
Displacement	m³/hr	9.7	9.7	17.3	20.6	30.0	30.0	17.3
Refrigerant		R22	R407C	R407C	R22	R407C	R22	R407C
Heating capacity	kW	13.5	13.0	23.8	20.4	43.1	42.8	21.2
Input power	kW	3.4	3.3	5.9	4.8	10.0	10.2	5.6
Current	A	6.0	6.0	10.1	8.8	18.5	18.7	8.1
Mass flow	g/s	58.0	53.0	100.0	92.6	185.0	180.0	99.0
Locked rotor amps	A	50.0	50.0	65.6	94.3	147.0	147.0	65.6
Rated load current	A	6.4	6.6	12.4	12.5	23.2	24.3	12.4
Max continuous current	A	8.9	9.3	17.3	17.5	32.5	34.0	17.3
Max operating current	A	7.0	7.1	14.4	12.7	24.5	24.9	14.4
Oil charge	Initial	L	0.74	0.74	1.89	3.25	3.25	1.57
	Replacement refill	L	0.62	0.62	1.45	3.14	3.14	1.45
Net weight	kg	22	22	30	40	62	62	30

Conditions: ET 5 °C, CT 55 °C, Superheat 11K Subcooling 8.3K

ZW HSP ZW KWP

R410A

ZW Series		*ZW430HSP	ZW42KWP	ZW54KWP	ZW72KWP	ZW83KWP
Nominal power	HP	20	3.5	4.5	6	7
Motor type		TE7	TFD			
Displacement	m³/hr	44.15	8.4	10.7	14.1	16.2
Refrigerant		R410A				
Heating capacity	kW	81.51	15.5	19.8	26.3	30.1
Input power	kW	21.12	4.2	5.2	6.8	7.8
Current	A	33.2	5.6	7.3	9.8	11.8
Mass flow	g/s	396.2	71.6	93.2	168.4	193.0
Locked rotor amps	A	255.5	41.0	52.0	75.0	100.0
Rated load current	A	44.29	6.9	8.6	12.5	13.6
Max continuous current	A	62.0	9.7	12.1	17.5	19.0
Max operating current	A	42.2	8.0	10.3	16.0	15.0
Oil charge	Initial	L	4.44	1.24	1.24	1.77
	Replacement refill	L	4.2	1.12	1.12	1.66
Net weight	kg	91.6	33	33	40	40

Conditions: ET 5 °C, CT 55 °C, Superheat 11K Subcooling 8.3K

\*Preliminary data

# Residential heating




## Compressor model

Refrigerant	Compressor model	Power supply	EVI	Rated heating capacity (kW)	Performance table	Specification
R22	ZW30KS-PFS-582	1Φ/220 V/50 Hz	√	10.1	P33	P37
	ZW34KS-PFS-582		√	11.6	P33	P37
	ZW42KS-PFS-522		√	14.7	P33	P37
	ZW52KA-PFS-522			15.8	P35	P37
	ZW52KS-PFS-522		√	17.8	P33	P37
	ZW68KS-PFS-522		√	23.4	P33	P37
R407C	ZW30KSE-PFS-582		√	9.8	P34	P37
	ZW34KSE-PFS-582		√	11.8	P34	P37
	ZW42KSE-PFS-522		√	14.3	P34	P37
	ZW52KAE-PFS-522			15.3	P35	P37
	ZW52KSE-PFS-522		√	17.3	P34	P37
	ZW68KSE-PFS-522		√	22.9	P34	P37
R410A	ZW059HSP-PFS-582		√	11.1	P36	P39
	ZW096HSP-PFS-522		√	18.3	P36	P39
	ZW126HSP-PFS-522		√	23.5	P36	P39
	ZWW050SP-3X9-522		√	30.0	-	P39
	VPW038DE-3X9-571		√	20.0	-	P39
	ZWW050SP-4X9-522	3Φ/380 V/50 Hz	√	30.0	-	P39
	VPW038DE-4X9-571		√	20.0	-	P39

# Operating envelopes


ZW30KS(E), ZW42KS(E)  
ZW52KS(E), ZW68KS(E)

R22/R407C

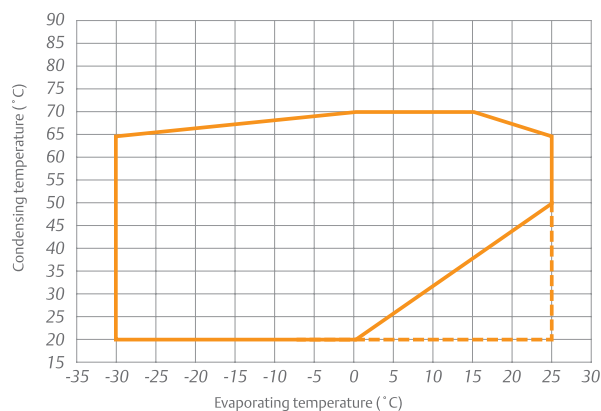


ZW059HSP, ZW096HSP, ZW126HSP

R410A

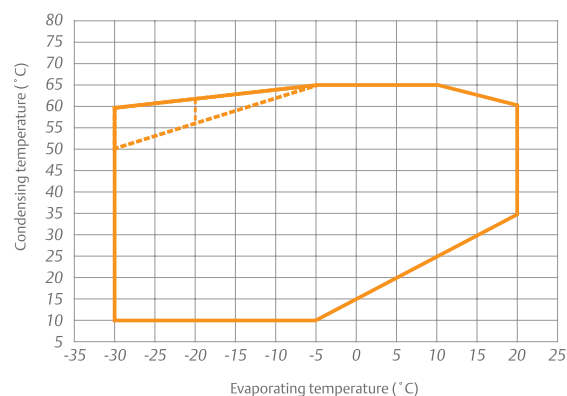


ZW52KA(E)

R22/R407C

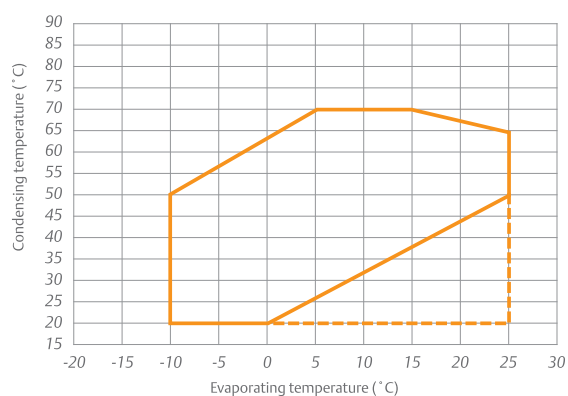


VPW038DE

R410A

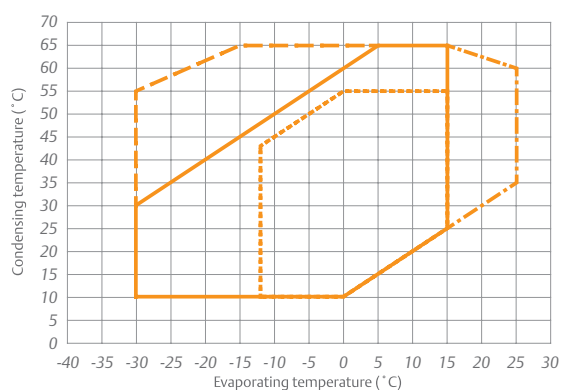

ZWW050SP

R410A

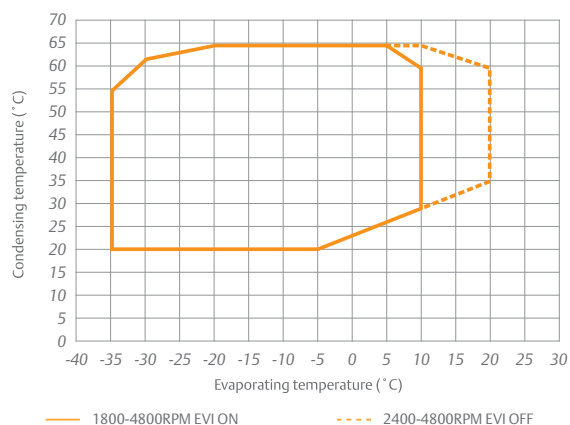



# ZW KS Heating capacity

R22 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Single phase

220V

Model		Condensing temperature °C	Evaporating temperature °C									
			-30	-25	-20	-15	-10	-5	0	5	10	15
ZW30KS	Q	65	4.62	5.20	5.85	6.57	7.36	8.25	9.22	10.30	11.48	12.78
		55	4.28	4.85	5.49	6.22	7.04	7.96	8.99	10.12	11.38	12.68
		45	4.07	4.63	5.29	6.04	6.90	7.86	8.95	10.16	11.50	12.98
		35	3.89	4.47	5.14	5.93	6.83	7.65	9.01	10.30	11.73	
		25	3.66	4.25	4.96	5.79	6.74	7.83	9.07			
	P	65	2.86	2.94	3.00	3.06	3.10	3.14	3.15	3.16	3.14	3.11
		55	2.37	2.41	2.44	2.47	2.50	2.52	2.53	2.53	2.51	2.48
		45	1.99	2.00	2.01	2.03	2.04	2.05	2.05	2.05	2.04	2.02
		35	1.68	1.67	1.66	1.67	1.68	1.68	1.69	1.70	1.70	
		25	1.39	1.37	1.36	1.36	1.36	1.38	1.40			
ZW34KS	Q	65				7.44	8.34	9.33	10.43			
		55	4.77	5.52	6.31	7.16	8.09	9.12	10.27	11.57	13.02	
		45	4.56	5.29	6.08	6.94	7.89	8.95	10.14	11.49	13.00	
		35	4.48	5.18	5.96	6.81	7.77	8.85	10.07	11.46	13.02	
		25	4.56	5.23	5.98	6.82	7.78	8.87	10.11			
	P	65				3.74	3.83	3.87	3.86			
		55	2.43	2.64	2.78	2.88	2.93	2.96	2.97	2.96	2.96	
		45	2.00	2.10	2.16	2.19	2.21	2.21	2.22	2.24	2.28	
		35	1.80	1.79	1.76	1.72	1.69	1.67	1.67	1.70	1.77	
		25	1.88	1.75	1.61	1.50	1.40	1.35	1.33			
ZW42KS	Q	65	6.56	7.47	8.42	9.44	10.55	11.78	13.15	14.69	16.43	18.39
		55	6.12	7.07	8.08	9.15	10.32	11.62	13.06	14.68	16.49	18.54
		45	5.59	6.62	7.69	8.85	10.11	11.49	13.03	14.75	16.67	18.82
		35	4.85	5.97	7.15	8.41	9.78	11.28	12.94	14.78	16.83	
		25	3.77	5.01	6.32	7.71	9.21	10.85	12.65			
	P	65	4.70	4.61	4.55	4.51	4.50	4.50	4.51	4.52	4.53	4.54
		55	3.48	3.49	3.52	3.56	3.60	3.65	3.68	3.71	3.72	3.71
		45	2.71	2.80	2.89	2.98	3.06	3.13	3.17	3.19	3.18	3.13
		35	2.09	2.24	2.38	2.50	2.60	2.67	2.70	2.69	2.63	
		25	1.37	1.56	1.72	1.85	1.95	1.99	1.99			
ZW52KS	Q	65	7.93	9.03	10.18	11.41	12.75	14.24	15.90	17.77	19.87	22.24
		55	7.40	8.55	9.76	11.06	12.48	14.05	15.80	17.76	19.95	22.42
		45	6.76	8.00	9.30	10.70	12.22	13.90	15.76	17.84	20.17	22.77
		35	5.86	7.22	8.64	10.17	11.82	13.64	15.65	17.88	20.36	
		25	4.56	6.06	7.64	9.32	11.14	13.12	15.31			
	P	65	5.69	5.67	5.64	5.61	5.58	5.55	5.52	5.49	5.47	5.46
		55	4.26	4.34	4.41	4.46	4.49	4.50	4.50	4.49	4.47	4.44
		45	3.28	3.45	3.59	3.70	3.77	3.81	3.82	3.81	3.77	3.70
		35	2.48	2.73	2.92	3.06	3.16	3.21	3.22	3.18	3.10	
		25	1.60	1.90	2.12	2.29	2.39	2.43	2.41			
ZW68KS	Q	65	8.98	10.64	12.42	14.32	16.35	18.52	20.83	23.29	25.90	28.66
		55	8.65	10.32	12.13	14.08	16.19	18.44	20.86	23.43	26.18	29.11
		45	8.27	9.95	11.79	13.79	15.96	18.29	20.80	23.50	26.38	29.46
		35	7.98	9.67	11.53	13.57	15.79	18.20	20.81	23.62	23.63	
		25	7.91	9.59	11.47	13.55	15.82	18.31	21.00			
	P	65	6.20	6.70	7.05	7.27	7.39	7.41	7.37	7.28	7.16	7.04
		55	4.87	5.27	5.55	5.72	5.81	5.84	5.82	5.78	5.74	5.71
		45	3.89	4.20	4.41	4.54	4.62	4.66	4.68	4.70	4.74	4.83
		35	3.19	3.43	3.58	3.69	3.76	3.82	3.88	3.98	4.12	
		25	2.73	2.90	3.01	3.10	3.18	3.27	3.39			

Note: Superheat 11K, Subcooling 8.3K

EVI Controls:

DLT<115°C, Economizer superheat 6K

DLT>115°C, Adjust the injection volume to control discharge temperature ≤115°C

# ZW KSE Heating capacity

R407C 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Single phase

220V

Model		Condensing temperature °C	Evaporating temperature °C									
			-30	-25	-20	-15	-10	-5	0	5	10	15
ZW30KSE	Q	65	4.32	4.95	5.58	6.24	6.96	7.77	8.70	9.77	11.06	12.54
		55	3.91	4.56	5.23	5.93	6.71	7.60	8.62	9.80	11.18	12.79
		45	3.62	4.29	4.98	5.73	6.56	7.51	8.61	9.89	11.83	13.11
		35	3.42	4.10	4.81	5.60	6.48	7.50	8.67	10.04	11.63	
		25	3.28	3.97	4.70	5.52	6.44	7.52	8.76			
	P	65	2.85	2.97	3.05	3.11	3.15	3.17	3.18	3.19	3.19	3.20
		55	2.35	2.42	2.47	2.50	2.51	2.52	2.52	2.51	2.51	2.52
		45	1.93	1.97	2.00	2.01	2.01	2.00	1.99	1.99	1.99	2.01
		35	1.59	1.61	1.62	1.62	1.61	1.60	1.60	1.60	1.61	
		25	1.32	1.33	1.33	1.32	1.31	1.31	1.31			
ZW34KSE	Q	65				7.06	7.85	8.73	9.73			
		55	5.17	5.90	6.66	7.47	8.37	9.37	10.49	11.76	13.20	
		45	4.79	5.57	6.39	7.28	8.25	9.34	10.57	11.95	13.52	
		35	4.31	5.11	5.97	6.91	7.94	9.10	10.41	11.89	13.56	
		25	4.16	4.97	5.84	6.81	7.88	9.09	10.46			
	P	65				3.37	3.36	3.35	3.35			
		55	2.96	3.02	3.05	3.06	3.07	3.07	3.07	3.07	3.08	
		45	2.34	2.41	2.45	2.48	2.50	2.50	2.51	2.51	2.53	
		35	1.57	1.66	1.72	1.76	1.78	1.80	1.81	1.81	1.83	
		25	0.81	0.91	0.99	1.04	1.07	1.09	1.10			
ZW42KSE	Q	65	6.58	7.35	8.18	9.09	10.12	11.29	12.63	14.18	15.96	18.01
		55	5.33	6.37	7.44	8.58	9.80	11.15	12.66	14.34	16.24	18.38
		45	4.72	5.95	7.19	8.47	9.81	11.26	12.84	14.58	16.51	18.66
		35	4.42	5.76	7.08	8.42	9.80	11.27	12.84	14.55	16.44	
		25	4.08	5.44	6.76	8.08	9.43	10.83	12.31			
	P	65	4.7	4.67	4.65	4.64	4.63	4.63	4.62	4.62	4.61	4.59
		55	3.65	3.64	3.63	3.63	3.64	3.65	3.66	3.66	3.66	3.65
		45	2.92	2.91	2.91	2.92	2.93	2.94	2.95	2.96	2.97	2.96
		35	2.40	2.39	2.38	2.39	2.39	2.40	2.41	2.41	2.41	
		25	1.98	1.96	1.94	1.93	1.93	1.92	1.91			
ZW52KSE	Q	65	7.96	8.89	9.89	10.99	12.23	13.65	15.27	17.15	19.30	21.78
		55	6.44	7.70	9.00	10.37	11.86	13.49	15.31	17.34	19.64	22.22
		45	5.71	7.20	8.69	10.24	11.87	13.62	15.53	17.63	19.97	22.57
		35	5.35	6.96	8.56	10.18	11.86	13.63	15.53	17.60	19.88	
		25	4.94	6.58	8.18	9.77	11.40	13.09	14.89			
	P	65	5.69	5.65	5.63	5.61	5.61	5.60	5.60	5.59	5.58	5.55
		55	4.42	4.40	4.39	4.40	4.41	4.42	4.43	4.44	4.43	4.42
		45	3.54	3.52	3.52	3.53	3.55	3.56	3.58	3.59	3.59	3.58
		35	2.91	2.89	2.88	2.89	2.90	2.91	2.92	2.92	2.92	
		25	2.40	2.37	2.35	2.34	2.33	2.33	2.32			
ZW68KSE	Q	65	9.00	10.47	12.06	13.79	15.68	17.74	20.00	22.47	25.16	28.07
		55	7.53	9.29	11.18	13.20	15.37	17.70	20.21	22.90	25.77	28.85
		45	6.99	8.95	11.01	13.19	15.49	17.93	20.50	23.23	26.13	29.21
		35	7.28	9.32	11.41	13.58	15.83	18.19	20.66	23.26	26.01	
		25	8.56	10.41	12.28	14.20	16.19	18.27	20.44			
	P	65	6.19	6.78	7.20	7.47	7.60	7.62	7.56	7.43	7.28	7.11
		55	5.11	5.49	5.72	5.84	5.87	5.84	5.78	5.71	5.65	5.63
		45	4.20	4.37	4.44	4.45	4.42	4.38	4.36	4.36	4.43	4.57
		35	3.66	3.64	3.58	3.52	3.46	3.44	3.47	3.57	3.77	
		25	3.95	3.63	3.39	3.23	3.14	3.15	3.26			

Note: Superheat 11K, Subcooling 8.3K

EVI Controls:

DLT<115°C, Economizer superheat 6K

DLT>115°C, Adjust the injection volume to control discharge temperature ≤115°C

## ZW KA Heating capacity

R22 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Single phase

220V

Model		Condensing temperature °C	Evaporating temperature °C					
			-10	-5	0	5	10	15
ZW52KA	Q	65				15.41	17.64	20.08
		55		11.87	13.59	15.77	18.28	21.00
		45	10.41	11.79	13.77	16.21	18.98	21.96
		35	10.50	12.12	14.33	17.00	20.00	
		25	11.28	13.11	15.53			
	P	65				5.06	5.04	5.02
		55		4.18	4.24	4.23	4.19	4.16
		45	3.44	3.58	3.62	3.58	3.52	3.47
		35	2.94	3.05	3.06	3.00	2.90	
		25	2.39	2.46	2.43			

Note: Superheat 11K, Subcooling 8.3K

## ZW KAE Heating capacity

R407C 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Single phase

220V

Model		Condensing temperature °C	Evaporating temperature °C					
			-10	-5	0	5	10	15
ZW52KAE	Q	65				14.76	17.01	19.60
		55		11.31	13.12	15.30	17.85	20.76
		45	9.83	11.44	13.46	15.89	18.73	21.96
		35	10.03	11.82	14.05	16.73	19.84	
		25	10.67	12.63	15.07			
	P	65				5.18	5.19	5.18
		55		4.14	4.19	4.20	4.20	4.19
		45	3.35	3.41	3.43	3.44	3.44	3.45
		35	2.78	2.81	2.83	2.84	2.87	
		25	2.27	2.30	2.33			

Note: Superheat 11K, Subcooling 8.3K

# ZW HSP Heating capacity

R410A 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Single phase

220V

Model		Condensing temperature °C	Evaporating temperature °C										
			-30	-25	-20	-15	-10	-5	0	5	10	15	20
ZW059HSP	Q	65						5.35	5.94	7.06	8.77		
		55	7.29	6.78	6.43	6.31	6.48	7.01	7.97	9.42	11.43	14.06	17.39
		45	5.53	5.86	6.30	6.90	7.73	8.86	10.35	12.28	14.70	17.69	21.31
		35	3.92	4.84	5.81	6.87	8.11	9.58	11.35	13.50	16.08	19.16	22.81
		25	3.46	4.72	5.96	7.23	8.62	10.17	11.97	14.08	16.56	19.48	
	P	65						3.99	3.96	3.96	3.97		
		55	3.83	3.74	3.66	3.59	3.53	3.48	3.45	3.44	3.44	3.47	3.51
		45	2.90	2.85	2.81	2.77	2.73	2.69	2.66	2.63	2.61	2.61	2.61
		35	2.21	2.21	2.20	2.19	2.17	2.14	2.11	2.08	2.04	2.01	1.98
		25	1.70	1.75	1.78	1.80	1.80	1.79	1.76	1.72	1.67	1.61	
ZW096HSP	Q	65						15.30	16.83	18.51	20.34		
		55	9.06	10.01	11.06	12.24	13.56	15.01	16.60	18.35	20.27	22.34	24.60
		45	8.25	9.26	10.39	11.66	13.06	14.62	16.33	18.20	20.24	22.47	24.87
		35	7.70	8.75	9.93	11.25	12.73	14.37	16.17	18.14	20.30	22.64	25.18
		25	7.27	8.34	9.55	10.91	12.44	14.13	16.00	18.05	20.29	22.73	
	P	65						6.39	6.41	6.40	6.37		
		55	5.32	5.41	5.50	5.57	5.63	5.67	5.68	5.67	5.63	5.55	5.44
		45	4.21	4.30	4.37	4.43	4.47	4.50	4.50	4.48	4.42	4.33	4.20
		35	3.41	3.48	3.53	3.58	3.61	3.62	3.60	3.56	3.49	3.39	3.25
		25	2.80	2.85	2.89	2.92	2.93	2.92	2.88	2.82	2.73	2.61	
ZW126HSP	Q	65						19.18	21.17	23.39	25.87		
		55	11.41	12.62	13.96	15.45	17.12	18.99	21.09	23.42	26.02	28.90	32.09
		45	10.45	11.78	13.25	14.89	16.71	18.75	21.02	23.53	26.33	29.41	32.82
		35	9.82	11.21	12.76	14.49	16.41	18.56	20.94	23.59	26.52	29.76	33.32
		25	9.37	10.78	12.35	14.11	16.08	18.28	20.72	23.45	26.46	29.79	
	P	65						7.98	8.00	7.98	7.94		
		55	6.51	6.69	6.84	6.95	7.03	7.08	7.09	7.07	7.02	6.95	6.84
		45	5.21	5.34	5.44	5.52	5.57	5.59	5.60	5.57	5.53	5.47	5.39
		35	4.20	4.28	4.35	4.40	4.44	4.45	4.45	4.44	4.41	4.38	4.33
		25	3.39	3.44	3.49	3.52	3.55	3.56	3.57	3.58	3.58	3.57	

Note: Superheat 11K, Subcooling 8.3K

EVI Controls:

DLT<115°C, Economizer superheat 6K

DLT>115°C, Adjust the injection volume to control discharge temperature ≤115°C

# Specifications 50 Hz

## ZW KS    ZW KA

R22

ZW Series			ZW30KS	ZW34KS	ZW42KS	ZW52KS	ZW68KS	ZW52KA
Nominal power	HP		2.5	3	3.5	4.5	6	4.5
Motor type			PFS					
Displacement	m³/hr		7.1	8.0	10.0	12.2	16.2	12.2
Refrigerant			R22					
Heating capacity	kW		10.1	11.6	14.7	17.8	23.4	15.8
Input power	kW		2.5	3.0	3.7	4.5	5.8	4.2
Current	A		11.5	13.7	21.5	24.3	28.9	22.9
Mass flow	g/s		43.5	47.8	60.1	14.6	97.8	74.0
Locked rotor amps	A		58.4	72.5	136.0	136.0	175.0	136.0
Rated load current	A		13.6	13.9	24.3	25.0	33.2	26.4
Max continuous current	A		19.0	19.4	34.0	35.0	46.5	36.9
Max operating current	A		17.2	17.7	28.0	30.8	43.0	28.2
Oil charge	Initial	L	0.74	0.74	1.57	1.57	1.89	1.57
	Replacement refill	L	0.62	0.62	1.45	1.45	1.77	1.45
Net weight	kg		22	22	30	30	44	30

Conditions: ET 5 °C, CT 55 °C, Superheat 11K Subcooling 8.3K

## ZW KSE    ZW KAE

R407C

ZW Series			ZW30KSE	ZW34KSE	ZW42KSE	ZW52KSE	ZW68KSE	ZW52KAE
Nominal power	HP		2.5	3	3.5	4.5	6	4.5
Motor type			PFS					
Displacement	m³/hr		7.1	8.0	10.0	12.2	16.2	12.2
Refrigerant			R407C					
Heating capacity	kW		9.8	11.8	14.3	17.3	22.9	15.5
Input power	kW		2.5	3.1	3.7	4.4	5.7	4.2
Current	A		11.5	14.1	21.1	23.8	28.3	22.6
Mass flow	g/s		41.0	54.8	57.5	71.3	93.5	70.0
Locked rotor amps	A		58.4	72.5	136.0	136.0	175.0	136.0
Rated load current	A		15.3	14.1	29.1	25.0	33.2	27.1
Max continuous current	A		21.4	19.8	40.8	35.0	46.5	38.0
Max operating current	A		17.7	18.3	28.0	32.0	43.0	29.3
Oil charge	Initial	L	0.74	0.74	1.57	1.57	1.89	1.57
	Replacement refill	L	0.62	0.62	1.45	1.45	1.77	1.45
Net weight	kg		22	22	30	30	44	30

Conditions: ET 5 °C, CT 55 °C, Superheat 11K Subcooling 8.3K

## ZW HSP

## R410A

ZW Series		ZW059HSP	ZW096HSP	ZW126HSP
Nominal power	HP	3	5	6
Motor type		PFS		
Displacement	m³/hr	5.1	8.3	11.0
Refrigerant		R407C		
Heating capacity	kW	11.1	18.3	23.5
Input power	kW	3.00	4.92	6.26
Current	A	14.1	25.5	32.0
Mass flow	g/s	42.8	71.2	93.6
Locked rotor amps	A	72.5	140.0	175.0
Rated load current	A	17.1	28.6	34.3
Max continuous current	A	24.0	40.1	48.0
Max operating current	A	18	32	40
Oil charge	Initial	L	0.74	1.57
	Replacement refill	L	0.62	1.45
Net weight	kg	22	35	44

Conditions: ET 5 °C, CT 55 °C, Superheat 11K Subcooling 8.3K

## Variable speed series

## R410A

Variable speed series		VPW038DE	ZWW050SP	VPW038DE	ZWW050SP
Nominal power	HP	5	6	5	6
Motor type		3X9		4X9	
Inverter input rating	V	220		380	
Displacement	cc/Rev	38.3	47.7	38.3	47.7
Refrigerants		R410A			
EVI		√			
Speed range	RPM	900-7,200	1,800-4,800	900-7,200	1,800-4,800
Heating capacity @75 Hz	kW	14.4	21.3	14.4	21.3
Input power @75 Hz	kW	4.38	6.23	4.38	6.23
Current @75 Hz	A	14	13	14	13
COP @75 Hz	kW/ kW	3.3	3.4	3.3	3.4
Noise @75 Hz	dBA	75	77	75	77
Oil charge	ml	1,183	1,597	1,183	1,597
Net weight	kg	20.8	26.5	20.8	26.5

Conditions: ET -7° C, CT 50 °C, Superheat 11K, Subcooling 8.3K

# District heating




## Compressor model

Refrigerant	Compressor model	Power supply	EVI	Rated heating capacity (kW)	Performance table	Specification
R22	ZW61KS-TFP-522	3Φ/380 V/50 Hz	✓	20.3	P40	P44
	ZW79KS-TFP-522		✓	25.8	P40	P44
	ZW108KS-TFP-522		✓	35.9	P40	P44
	ZW124KS-TFP-52E		✓	42.6	P41	P44
	ZW125KS-TFP-522		✓	41.6	P41	P44
	ZW150KS-TFP-522		✓	50.4	P41	P44
R407C	ZW150KSE-TFP-522		✓	49.8	P42	P44
R410A	ZW258HSP-TFP-522		✓	47.5	P43	P44
	ZW286HSP-TFP-522		✓	52.2	P43	P44
	ZW430HSP-TEP-522		✓	67.9	-	P44
	ZW520HSP-TEP-522		✓	95.8	P43	P44

## Operating envelopes


ZW61KS, ZW79KS, ZW124KS, ZW125KS,  
ZW150KS(E)

R22/R407C

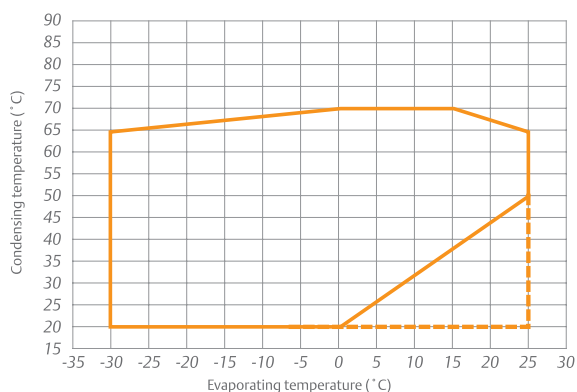

ZW258HSP, ZW286HSP

R410A

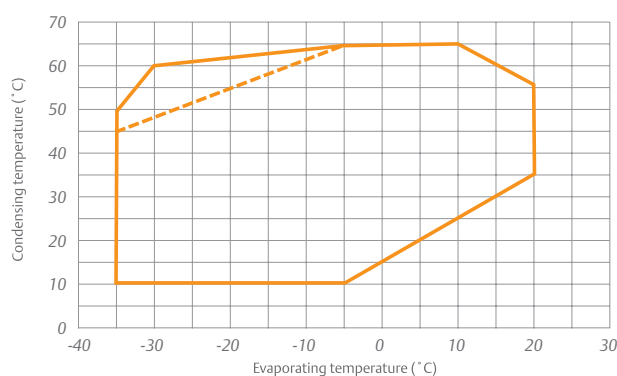

# ZW KS Heating capacity

R22 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C									
			-30	-25	-20	-15	-10	-5	0	5	10	15
ZW61KS	Q	65	9.95	10.86	11.91	13.13	14.54	16.17	18.04	20.18	22.61	25.35
		55	8.85	9.91	11.12	12.51	14.09	15.90	17.95	20.28	22.90	25.84
		45	8.15	9.34	10.68	12.20	13.92	15.87	18.08	20.56	23.34	26.45
		35	7.74	9.01	10.45	12.07	13.91	15.97	18.29	20.90	23.81	
		25	7.46	8.80	10.30	12.00	12.90	16.05	18.46			
	P	65	5.79	5.82	5.88	5.95	6.03	6.10	6.17	6.22	6.23	6.21
		55	4.47	4.50	4.56	4.64	4.73	4.82	4.89	4.95	4.98	4.98
		45	3.51	3.54	3.59	3.67	3.76	3.86	3.94	4.01	4.05	4.05
		35	2.80	2.82	2.87	2.95	3.04	3.13	3.22	3.29	3.33	
		25	2.24	2.26	2.30	2.37	2.45	2.54	2.62			
ZW79KS	Q	65	12.11	13.64	15.25	16.98	18.87	20.97	23.32	25.97	28.95	32.31
		55	10.23	12.06	13.95	15.94	18.08	20.41	22.97	25.81	28.97	32.49
		45	9.24	11.26	13.32	15.48	17.75	20.21	22.87	25.80	29.03	32.60
		35	8.77	10.88	13.01	15.21	17.53	20.00	22.66	25.57	28.76	
		25	8.47	10.56	12.66	14.80	17.04	19.42	21.98			
	P	65	7.51	7.41	7.38	7.42	7.51	7.64	7.81	7.99	8.18	8.37
		55	5.86	5.80	5.82	5.88	6.00	6.14	6.31	6.48	6.65	6.81
		45	4.62	4.61	4.66	4.76	4.89	5.05	5.21	5.38	5.53	5.66
		35	8.77	10.88	13.01	15.21	17.53	20.00	22.66	25.57	28.76	
		25	2.77	2.86	2.99	3.15	3.33	3.50	3.67			
ZW108KS	Q	65		15.86	18.87	21.99	25.26	28.67	32.22	35.92	39.76	43.76
		55		15.42	18.66	21.82	25.28	28.64	32.20	35.88	39.66	43.55
		45		15.83	19.20	22.65	26.15	29.72	33.36	37.07	40.85	44.71
		35		16.23	19.90	27.31	27.31	31.05	34.83	38.64	42.48	
		25		15.75	19.77	27.76	27.76	31.74	35.72			
	P	65		9.83	10.02	10.32	10.32	10.40	10.43	10.39	10.39	10.10
		55		7.81	7.97	8.21	8.21	8.28	8.31	8.29	8.21	8.06
		45		6.33	6.45	6.64	6.64	6.71	6.74	6.73	6.68	6.56
		35		5.19	5.27	5.42	5.42	5.48	5.52	5.52	5.49	
		25		4.20	4.24	4.35	4.35	4.40	4.45			

Note: Superheat 11K, Subcooling 8.3K

EVI Controls:

DLT<115°C, Economizer superheat 6K

DLT>115°C, Adjust the injection volume to control discharge temperature ≤115°C



# ZW KS Heating capacity

R22 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C									
			-30	-25	-20	-15	-10	-5	0	5	10	15
ZW124KS	Q	65	17.86	19.98	22.53	25.52	28.92	32.74	36.95	41.55	46.54	51.90
		55	17.20	19.58	22.38	25.57	29.15	33.11	37.45	42.15	47.20	52.59
		45	17.06	19.63	22.58	25.90	29.59	33.62	38.01	42.72	47.76	53.12
		35	15.64	18.32	21.35	24.73	28.44	32.48	36.83	41.49	46.44	
		25	15.13	17.85	20.89	22.25	26.91	29.87	32.12	36.64		
	P	65	11.10	11.49	11.83	12.13	12.39	12.62	12.82	13.01	13.18	13.36
		55	8.86	9.22	9.54	9.81	10.05	10.26	10.46	10.64	10.82	11.00
		45	7.38	7.69	7.96	8.19	8.40	8.59	8.76	8.93	9.09	9.27
		35	6.13	6.38	6.59	6.77	6.93	7.07	7.21	7.34	7.48	
		25	5.59	5.76	5.90	6.02	6.11	6.20	6.29	6.37		
ZW125KS	Q	65	18.02	19.96	22.40	25.31	28.67	32.45	36.63	41.18	46.07	51.27
		55	16.90	19.15	21.86	25.02	28.60	32.57	36.91	41.58	46.58	51.86
		45	16.35	18.73	21.56	24.80	28.44	32.43	36.77	41.42	46.35	51.55
		35	15.95	18.32	21.10	24.26	27.79	31.65	35.82	40.27	44.98	
		25	15.32	17.50	20.07	22.99	26.25	29.81	33.65	37.75		
	P	65	10.74	10.87	11.04	11.24	11.46	11.7	11.95	12.21	12.46	12.71
		55	7.89	8.23	8.58	8.93	9.27	9.60	9.91	10.19	10.45	10.66
		45	6.14	6.60	7.03	7.44	7.81	8.14	8.42	8.65	8.81	8.91
		35	5.12	5.61	6.04	6.42	6.73	6.97	7.13	7.21	7.20	
		25	4.47	4.90	5.24	5.50	5.66	5.72	5.67	5.51		
ZW150KS	Q	65	19.42	23.37	27.31	31.35	35.59	40.11	45.00	50.38	56.32	62.93
		55	20.21	23.80	27.47	31.32	35.45	39.93	44.88	50.38	56.53	63.42
		45	20.04	23.41	26.94	30.73	34.87	39.45	44.58	50.33	56.82	64.13
		35	19.47	22.75	26.27	30.12	34.41	39.22	44.64	50.79	57.74	
		25	19.03	22.35	25.99	30.04	34.6	39.76	45.62	52.28		
	P	65	11.54	12.2	12.81	13.36	13.87	14.35	14.8	15.23	15.65	16.05
		55	9.62	10.15	10.64	11.09	11.53	11.94	12.34	12.74	13.14	13.55
		45	8.10	8.52	8.93	9.31	9.69	10.07	10.45	10.84	11.25	11.68
		35	6.81	7.15	7.49	7.83	8.18	8.54	8.92	9.33	9.78	
		25	5.56	5.85	6.15	6.47	6.81	7.18	7.59	8.04		

Note: Superheat 11K, Subcooling 8.3K

EVI Controls:

DLT<115°C, Economizer superheat 6K

DLT>115°C, Adjust the injection volume to control discharge temperature ≤115°C

## ZW KSE Heating capacity

R407C 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C									
			-30	-25	-20	-15	-10	-5	0	5	10	15
ZW150KSE	Q	65	16.31	20.07	24.08	28.39	33.02	38.03	43.46	49.35	55.75	62.69
		55	17.89	21.20	24.86	28.89	33.36	38.28	43.73	49.72	56.31	63.54
		45	17.90	20.94	24.42	28.37	32.84	37.87	43.51	49.78	56.75	64.45
		35	17.14	20.09	23.58	27.63	32.28	37.60	43.60	50.35	57.88	
		25	16.40	19.46	23.13	27.45	32.48	38.26	44.82	52.21		
	P	65	11.01	11.72	12.39	13.01	13.61	14.16	14.69	15.19	15.67	16.13
		55	9.04	9.64	10.21	10.74	11.24	11.72	12.17	12.60	13.02	13.42
		45	7.64	8.14	8.61	9.05	9.47	9.88	10.26	10.64	11.01	11.37
		35	6.46	6.86	7.25	7.62	7.97	8.31	8.64	8.97	9.30	
		25	5.17	5.49	5.80	6.10	6.40	6.68	6.97	7.26		

Note: Superheat 11K, Subcooling 8.3K

EVI Controls:

DLT<115°C, Economizer superheat 6K

DLT>115°C, Adjust the injection volume to control discharge temperature ≤115°C

## ZW HSP Heating capacity

R410A 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C											
			-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20
ZW258HSP	Q	65							38.20	42.21	46.76	51.93		
		55		22.07	24.64	27.41	30.45	33.84	37.65	41.95	46.82	52.32	58.54	65.54
		45	17.21	19.86	22.68	25.74	29.12	32.89	37.12	41.89	47.26	53.31	60.11	67.74
		35	16.25	18.94	21.85	25.05	28.60	32.59	37.08	42.14	47.85	54.29	61.51	69.61
		25	16.42	19.00	21.83	25.00	28.56	32.60	37.18	42.38	48.27	54.92	62.41	
	P	65							15.08	15.20	15.35	15.44		
		55		14.79	13.75	13.16	12.91	12.92	13.10	13.34	13.57	13.68	13.58	13.19
		45	12.02	10.17	9.75	9.66	9.82	10.12	10.48	10.80	10.99	10.96	10.61	9.86
		35	9.97	7.70	7.66	7.84	8.15	8.51	8.81	8.97	8.88	8.47	7.64	6.29
		25	7.99	6.38	6.47	6.68	6.91	7.08	7.09	6.84	6.25	6.22	6.66	
ZW286HSP	Q	65							42.27	47.4	53.06	59.03		
		55		30.49	30.01	31.16	33.68	37.33	41.87	47.06	52.65	58.41	64.08	69.43
		45	19.886	25.01	26.06	28.45	31.94	36.28	41.24	46.56	52.00	57.33	62.30	66.67
		35	18.232	20.90	23.48	27.12	31.58	36.61	41.98	47.43	52.73	57.63	61.89	65.27
		25	17.309	19.55	23.66	28.54	33.97	39.69	45.46	51.04	56.19	60.67	64.22	
	P	65							17.05	16.98	17.03	17.17		
		55		17.47	16.51	15.82	15.35	15.08	14.97	14.97	15.06	15.19	15.34	15.46
		45	10.744	12.60	12.13	11.85	11.73	11.71	11.78	11.89	12.01	12.09	12.11	12.03
		35	8.328	9.23	9.20	9.28	9.43	9.62	9.81	9.97	10.06	10.05	9.89	9.55
		25	7.333	7.26	7.61	7.99	8.36	8.70	8.97	9.13	9.13	8.96	8.57	
* ZW520HSP	Q	65							72.09	80.54	90.35	101.75		
		55		41.65	47.07	52.75	58.90	65.78	73.60	82.60	93.00	105.05	118.97	134.99
		45	34.87	40.64	46.54	52.80	59.64	67.31	76.03	86.04	97.56	110.82	126.06	143.51
		35	32.63	38.66	44.93	51.66	59.09	67.44	76.95	87.84	100.36	114.73	131.18	149.95
		25	28.63	34.82	41.34	48.43	56.32	65.25	75.43	87.11	100.52	115.88	133.43	
	P	65							29.92	29.90	29.95	30.11		
		55		25.97	26.10	26.15	26.15	26.12	26.11	26.13	26.23	26.43	26.76	27.25
		45	19.82	20.17	20.41	20.56	20.66	20.73	20.82	20.94	21.13	21.42	21.85	22.44
		35	15.55	16.02	16.37	16.64	16.85	17.04	17.24	17.47	17.77	18.17	18.70	19.39
		25	11.24	11.84	12.32	12.72	13.06	13.37	13.69	14.05	14.47	14.99	15.64	

Note: Superheat 11K, Subcooling 8.3K

EVI Controls:

DLT<115°C, Economizer superheat 6K

DLT>115°C, Adjust the injection volume to control discharge temperature ≤115°C

\*Preliminary data

# Specifications 50 Hz

## ZW KS

## R22

ZW Series		ZW61KS	ZW79KS	ZW108KS	ZW124KS	ZW125KS	ZW150KS
Nominal power	HP	5	7	9	10	10	13
Motor type		TFP					
Displacement	m³/hr	14.4	18.8	24.9	29.2	29.1	35.3
Refrigerant		R22					
Heating capacity	kW	20.3	25.8	35.9	42.62	41.6	50.4
Input power	kW	5.0	6.5	8.3	10.59	10.2	12.7
Current	A	8.5	11.9	16.1	21.42	18.6	24.8
Mass flow	g/s	88.2	110.6	154	174.08	173.5	210.4
Locked rotor amps	A	59.0	90.5	133.0	155.0	133.0	157.0
Rated load current	A	10.1	12.1	19.3	20.4	20.1	25.6
Max continuous current	A	14.2	17.0	27.0	28.6	28.1	35.8
Max operating current	A	11.8	13.6	20.5	26.8	27.2	31.5
Oil charge	Initial	L	1.57	1.89	3.25	3.25	3.37
	Replacement refill	L	1.45	1.77	3.14	3.14	3.25
Net weight	kg	30	41	60	62	60	65

Conditions: ET 5 °C, CT 55 °C  
Superheat 11K, Subcooling 8.3K

## ZW KSE

## R407C

## ZW HSP

## R410A

ZW Series		ZW150KSE	
Nominal power	HP	13	
Motor type		TFP	
Displacement	m³/hr	35.3	
Refrigerant		R407C	
Heating capacity	kW	49.8	
Input power	kW	12.6	
Current	A	24.5	
Mass flow	g/s	204	
Locked rotor amps	A	157	
Rated load current	A	26.6	
Max continuous current	A	37.3	
Max operating current	A	31.4	
Oil charge	Initial	L	3.37
	Replacement refill	L	3.25
Net weight		kg	65

Conditions: ET 5 °C, CT 55 °C  
Superheat 11K, Subcooling 8.3K

ZW Series		ZW258HSP	ZW286HSP	*ZW430HSP	*ZW520HSP
Nominal power	HP	11	13	20	25
Motor type		TFP		TEP	
Displacement	m³/hr	21.6	24.9	36.58	45.73
Refrigerant		R410A			
Heating capacity	kW	47.4	52.2	67.94	95.76
Input power	kW	12.0	13.4	17.61	24.05
Current	A	24.8	25.5	33.8	42.7
Mass flow	g/s	188.1	218.0	330.1	415.6
Locked rotor amps	A	156	174.0	255.5	273.8
Rated load current	A	21.1	27.7	44.29	46.10
Max continuous current	A	29.5	38.8	62.0	64.5
Max operating current	A	30.6	33.0	42.2	52.7
Oil charge	Initial	L	3.3	3.37	4.44
	Replacement refill	L	3.2	3.25	4.2
Net weight	kg	65	65	91.6	91.6

Conditions: ET 5 °C, CT 55 °C  
Superheat 11K, Subcooling 8.3K  
\*Preliminary data

# Industrial heating


## Compressor model

Refrigerant	Compressor model	Power supply	EVI	Rated heating capacity (kW)	Performance table	Specification
R134a	ZWD61KAE-TFD-532	3Φ/380-420 V/50 Hz, 3Φ/460 V/60 Hz		12.2	P47	P51
	ZWD72KAE-TFD-532			14.7	P47	P51
	ZWD81KAE-TFD-532			16.1	P47	P51
	ZWD61KBE-TFP-532	3Φ/380 V/50 Hz		13.0	P48	P52
	ZWD72KBE-TFP-532			15.5	P48	P52
	ZWD81KBE-TFP-532			16.6	P48	P52
	ZW61KBE-TFP-522			13.0	P49	P52
	ZW72KBE-TFP-522			15.5	P49	P52
	ZW79KBE-TFP-522			16.6	P49	P52
	ZW125KBE-TFP-522			29.1	P50	P52
	ZW150KBE-TFP-522			35.3	P50	P52
	ZW79KAE-TFP-522			16.1	P46	P51
	ZW79KSE-TFP-522		√	17.4	P46	P51
	ZW72KSE-TF7-522	3Φ/380 V/60 Hz	√	20.4	P51	P52

## Operating envelopes


ZW79KAE, ZW79KSE,  
ZWD61KAE, ZWD72KAE,  
ZWD81KAE

R134a

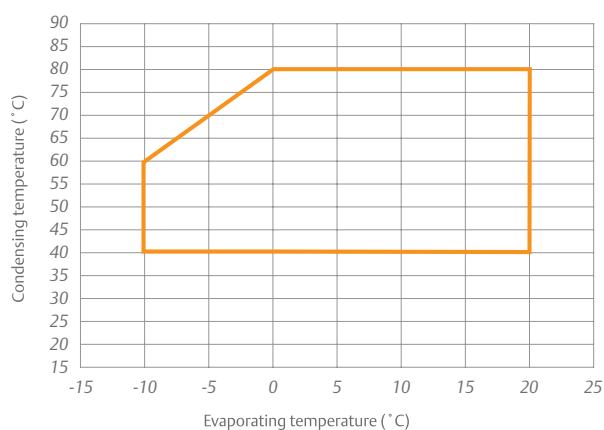

ZW61KBE, ZW72KBE, ZW79KBE,  
ZW125KBE, ZW150KBE, ZWD61KBE,  
ZWD72KBE, ZWD81KBE

R134a

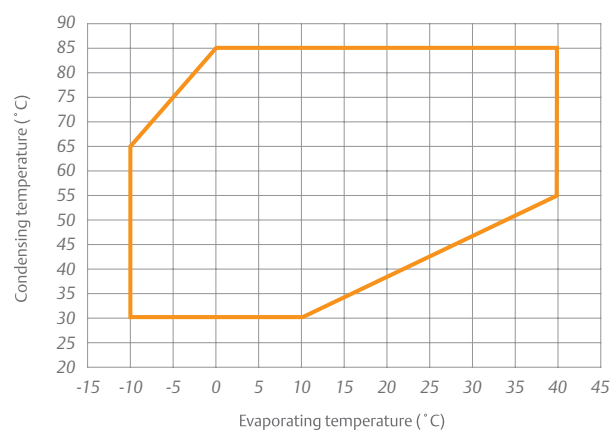

## ZW KSE Heating capacity

R134a 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C						
			-10	-5	0	5	10	15	20
ZW79KSE	Q	80			15.17	16.78	18.65	20.83	23.35
		75			15.06	16.80	18.83	21.18	23.89
		70		13.41	15.02	16.89	19.07	21.59	24.49
		65		13.32	15.03	17.03	19.36	22.05	25.14
		60	11.72	13.27	15.09	17.22	19.69	22.54	25.82
		55	11.62	13.26	15.18	17.42	20.04	23.05	26.51
		50	11.54	13.25	15.27	17.64	20.39	23.57	27.20
		45	11.46	13.25	15.37	17.85	20.74	24.07	27.88
		40	11.38	13.24	15.45	18.04	21.06	24.55	28.53
	P	80			6.39	6.53	6.70	6.88	7.07
		75			5.81	5.97	6.15	6.33	6.51
		70		5.18	5.33	5.50	5.67	5.84	5.99
		65		4.77	4.93	5.08	5.23	5.38	5.50
		60	4.27	4.41	4.56	4.69	4.81	4.91	4.98
		55	3.96	4.08	4.19	4.29	4.37	4.41	4.43
		50	3.65	3.74	3.81	3.86	3.87	3.85	3.79
		45	3.31	3.35	3.37	3.36	3.30	3.20	3.05
		40	2.91	2.90	2.85	2.76	2.62	2.43	2.17

Note: Superheat 11K, Subcooling 8.3K

## ZW KAE Heating capacity

R134a 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C						
			-10	-5	0	5	10	15	20
ZW79KAE	Q	80			12.58	14.40	16.52	18.97	21.75
		75			12.72	14.67	16.95	19.55	22.50
		70		11.12	12.91	14.99	17.40	20.15	23.25
		65		11.24	13.14	15.35	17.88	20.77	24.01
		60	9.72	11.41	13.41	15.72	18.38	21.39	24.76
		55	9.84	11.61	13.70	16.11	18.88	22.00	25.50
		50	9.99	11.83	14.00	16.51	19.37	22.60	26.21
		45	10.16	12.07	14.31	16.90	19.84	23.17	26.89
		40	10.35	12.31	14.62	17.27	20.29	23.70	27.51
	P	80			5.83	6.03	6.24	6.45	6.65
		75			5.33	5.54	5.75	5.96	6.15
		70		4.69	4.88	5.09	5.31	5.51	5.68
		65		4.28	4.48	4.69	4.89	5.08	5.23
		60	3.75	3.92	4.12	4.32	4.51	4.68	4.81
		55	3.44	3.61	3.80	3.98	4.16	4.30	4.39
		50	3.17	3.34	3.51	3.68	3.82	3.93	3.99
		45	2.95	3.10	3.25	3.40	3.51	3.59	3.60
		40	2.77	2.90	3.03	3.14	3.22	3.25	3.22

Note: Superheat 11K, Subcooling 8.3K

# ZWD KAE Heating capacity

Q = Heating capacity (kW) P = Input power (kW) Three phase

R134a 50 Hz

380-420V

Model		Condensing temperature °C	Evaporating temperature °C						
			-10	-5	0	5	10	15	20
ZWD61KAE	Q	80			8.55	9.07	11.83	13.84	15.15
		75			9.06	10.56	12.27	14.24	16.49
		70		8.29	9.87	11.44	13.25	15.33	17.71
		65		8.65	10.08	11.72	13.60	15.76	18.24
		60	7.15	8.03	10.24	11.96	13.94	16.20	18.78
		55	7.43	8.83	10.42	12.24	14.32	16.70	19.41
		50	7.47	8.97	10.67	12.60	14.81	17.32	20.18
		45	7.61	9.22	11.04	13.11	15.46	18.13	21.14
		40	7.90	9.65	11.61	13.83	16.34	19.17	22.37
	P	80			4.47	4.62	4.81	5.02	5.21
		75			4.21	4.35	4.53	4.76	5.01
		70		3.65	3.76	3.88	4.02	4.16	4.30
		65		3.34	3.45	3.56	3.68	3.79	3.89
		60	2.62	2.29	3.12	3.24	3.35	3.44	3.50
		55	2.54	2.69	2.84	2.97	3.07	3.15	3.21
		50	2.27	2.46	2.64	2.79	2.89	2.95	3.01
		45	2.10	2.35	2.57	2.74	2.85	2.91	2.96
		40	2.10	2.41	2.66	2.86	2.99	3.05	3.08
ZWD72KAE	Q	80			11.94	13.71	15.71	18.01	20.65
		75			12.07	13.81	15.95	18.26	21.08
		70		10.33	12.15	13.98	16.06	18.46	21.24
		65		10.69	12.34	14.23	16.40	18.92	21.85
		60	9.38	11.02	12.51	14.48	16.76	19.41	22.50
		55	9.37	10.91	12.68	14.74	17.14	19.95	23.21
		50	9.41	11.01	12.86	15.03	17.57	20.54	23.99
		45	9.46	11.12	13.07	15.36	18.05	21.20	24.86
		40	9.51	11.26	13.31	15.74	18.60	21.94	25.83
	P	80			5.55	5.57	5.59	5.60	5.62
		75			5.26	5.28	5.30	5.32	5.35
		70		5.01	5.02	5.03	5.04	5.05	5.07
		65		4.53	4.54	4.54	4.55	4.56	4.59
		60	4.17	4.31	4.10	4.11	4.12	4.14	4.18
		55	3.69	3.70	3.71	3.72	3.74	3.77	3.83
		50	3.32	3.33	3.34	3.36	3.40	3.45	3.54
		45	2.97	2.99	3.01	3.04	3.10	3.18	3.29
		40	2.63	2.66	2.70	2.75	2.83	2.94	3.08
ZWD81KAE	Q	80			12.58	14.40	16.52	18.97	21.75
		75			12.71	14.67	16.95	19.55	22.50
		70		11.12	12.90	14.99	17.40	20.15	23.25
		65		11.24	13.14	15.35	17.88	20.77	24.01
		60	9.72	11.41	13.41	15.72	18.38	21.39	24.76
		55	9.84	11.61	13.70	16.11	18.88	22.00	25.50
		50	9.99	11.83	14.00	16.51	19.37	22.60	26.21
		45	10.16	12.07	14.31	16.90	19.84	23.17	26.89
		40	10.35	12.31	14.62	17.27	20.29	23.70	27.51
	P	80			5.83	6.03	6.24	6.45	6.65
		75			5.33	5.54	5.75	5.96	6.15
		70		4.69	4.88	5.09	5.31	5.51	5.68
		65		4.28	4.48	4.69	4.89	5.08	5.23
		60	3.75	3.92	4.12	4.32	4.51	4.68	4.81
		55	3.44	3.61	3.79	3.98	4.15	4.30	4.39
		50	3.17	3.33	3.51	3.68	3.82	3.93	3.99
		45	2.95	3.10	3.25	3.40	3.51	3.59	3.60
		40	2.77	2.90	3.03	3.14	3.22	3.25	3.22

Note: Superheat 11K, Subcooling 8.3K

# ZWD KBE Heating capacity

R134a 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model	Condensing temperature °C	Evaporating temperature °C										
		-10	-5	0	5	10	15	20	25	30	35	40
* ZWD61KBE	Q	85		9.16	10.68	12.33	14.15	16.20	18.52	21.16	24.16	27.58
		80		9.40	10.95	12.66	14.57	16.73	19.20	22.01	25.21	28.86
		75		9.67	11.27	13.04	15.05	17.35	19.97	22.96	26.38	30.27
		70		8.49	9.97	11.62	13.48	15.60	18.03	20.82	24.01	27.66
		65	7.31	8.74	10.26	11.98	13.95	16.20	18.79	21.77	25.18	29.07
		60	7.59	8.99	10.56	12.35	14.42	16.80	19.55	22.71	26.34	30.48
		50	7.87	9.35	11.06	13.05	15.37	18.06	21.18	24.77	28.88	
		40	7.85	9.46	11.36	13.59	16.21	19.27	22.81			
	P	85		4.86	5.05	5.24	5.43	5.63	5.83	6.03	6.23	6.44
		80		4.52	4.70	4.87	5.05	5.23	5.41	5.60	5.78	5.98
		75		4.20	4.37	4.53	4.70	4.86	5.03	5.19	5.36	5.54
		70		3.74	3.90	4.06	4.21	4.36	4.51	4.66	4.82	4.97
		65	3.35	3.49	3.64	3.78	3.93	4.07	4.20	4.34	4.48	4.62
		60	3.09	3.23	3.38	3.51	3.64	3.77	3.89	4.02	4.14	4.27
		50	2.67	2.80	2.93	3.05	3.16	3.27	3.37	3.47	3.57	
		40	2.33	2.45	2.56	2.67	2.76	2.85	2.94			
* ZWD72KBE	Q	85		10.90	12.71	14.68	16.85	19.29	22.05	25.19	28.77	32.83
		80		11.19	13.04	15.07	17.34	19.92	22.85	26.20	30.01	34.36
		75		11.52	13.41	15.53	17.92	20.65	23.77	27.33	31.41	36.04
		70		10.10	11.87	13.83	16.04	18.57	21.46	24.78	28.59	32.93
		65	8.59	10.40	12.22	14.27	16.60	19.28	22.37	25.91	29.97	34.61
		60	9.04	10.70	12.57	14.70	17.16	20.00	23.27	27.04	31.36	36.29
		50	9.37	11.13	13.17	15.53	18.29	21.50	25.22	29.49	34.39	
		40	9.35	11.26	13.52	16.18	19.30	22.94	27.16			
	P	85		5.96	6.20	6.44	6.67	6.91	7.15	7.40	7.65	7.92
		80		5.55	5.77	5.99	6.20	6.42	6.65	6.87	7.10	7.34
		75		5.16	5.36	5.56	5.77	5.97	6.17	6.38	6.59	6.80
		70		4.60	4.79	4.98	5.17	5.36	5.54	5.73	5.91	6.11
		65	4.10	4.29	4.47	4.65	4.82	4.99	5.16	5.33	5.50	5.67
		60	3.79	3.97	4.15	4.31	4.47	4.63	4.78	4.93	5.09	5.24
		50	3.28	3.44	3.60	3.74	3.88	4.01	4.14	4.26	4.38	
		40	2.86	3.01	3.15	3.27	3.39	3.50	3.60			
* ZWD81KBE	Q	85		11.68	13.62	15.73	18.06	20.67	23.63	27.00	30.83	35.19
		80		11.99	13.97	16.15	18.59	21.35	24.49	28.08	32.17	36.82
		75		12.34	14.37	16.64	19.21	22.13	25.47	29.29	33.66	38.62
		70		10.83	12.72	14.82	17.19	19.90	23.00	26.56	30.63	35.29
		65	9.20	11.15	13.09	15.29	17.79	20.67	23.97	27.77	32.12	37.09
		60	9.69	11.47	13.47	15.76	18.39	21.43	24.94	28.98	33.61	38.89
		50	10.05	11.93	14.11	16.65	19.61	23.04	27.02	31.61	36.85	
		40	10.02	12.07	14.49	17.34	20.69	24.59	29.10			
	P	85		6.14	6.38	6.62	6.87	7.11	7.36	7.62	7.88	8.15
		80		5.71	5.93	6.16	6.39	6.61	6.84	7.07	7.31	7.55
		75		5.31	5.52	5.73	5.93	6.14	6.35	6.56	6.78	7.00
		70		4.73	4.93	5.13	5.32	5.51	5.70	5.89	6.09	6.28
		65	4.22	4.41	4.60	4.78	4.96	5.14	5.31	5.49	5.66	5.84
		60	3.90	4.09	4.27	4.44	4.60	4.76	4.92	5.08	5.23	5.39
		50	3.38	3.54	3.70	3.85	3.99	4.13	4.26	4.38	4.51	
		40	2.94	3.10	3.24	3.37	3.49	3.60	3.71			

Note: Superheat 5K, Subcooling 10K

\*Preliminary data

# ZW KBE Heating capacity

R134a 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model	Condensing temperature °C	Evaporating temperature °C										
		-10	-5	0	5	10	15	20	25	30	35	40
* ZW61KBE	Q	85		9.16	10.68	12.33	14.15	16.20	18.52	21.16	24.16	27.58
		80		9.40	10.95	12.66	14.57	16.73	19.20	22.01	25.21	28.86
		75		9.67	11.27	13.04	15.05	17.35	19.97	22.96	26.38	30.27
		70		8.49	9.97	11.62	13.48	15.60	18.03	20.82	24.01	27.66
		65	7.31	8.74	10.26	11.98	13.95	16.20	18.79	21.77	25.18	29.07
		60	7.59	8.99	10.56	12.35	14.42	16.80	19.55	22.71	26.34	30.48
		50	7.87	9.35	11.06	13.05	15.37	18.06	21.18	24.77	28.88	
		40	7.85	9.46	11.36	13.59	16.21	19.27	22.81			
	P	85		4.86	5.05	5.24	5.43	5.63	5.83	6.03	6.23	6.44
		80		4.52	4.70	4.87	5.05	5.23	5.41	5.60	5.78	5.98
		75		4.20	4.37	4.53	4.70	4.86	5.03	5.19	5.36	5.54
		70		3.74	3.90	4.06	4.21	4.36	4.51	4.66	4.82	4.97
		65	3.35	3.49	3.64	3.78	3.93	4.07	4.20	4.34	4.48	4.62
		60	3.09	3.23	3.38	3.51	3.64	3.77	3.89	4.02	4.14	4.27
		50	2.67	2.80	2.93	3.05	3.16	3.27	3.37	3.47	3.57	
		40	2.33	2.45	2.56	2.67	2.76	2.85	2.94			
* ZW72KBE	Q	85		10.90	12.71	14.68	16.85	19.29	22.05	25.19	28.77	32.83
		80		11.19	13.04	15.07	17.34	19.92	22.85	26.20	30.01	34.36
		75		11.52	13.41	15.53	17.92	20.65	23.77	27.33	31.41	36.04
		70		10.10	11.87	13.83	16.04	18.57	21.46	24.78	28.59	32.93
		65	8.59	10.40	12.22	14.27	16.60	19.28	22.37	25.91	29.97	34.61
		60	9.04	10.70	12.57	14.70	17.16	20.00	23.27	27.04	31.36	36.29
		50	9.37	11.13	13.17	15.53	18.29	21.50	25.22	29.49	34.39	
		40	9.35	11.26	13.52	16.18	19.30	22.94	27.16			
	P	85		5.96	6.20	6.44	6.67	6.91	7.15	7.40	7.65	7.92
		80		5.55	5.77	5.99	6.20	6.42	6.65	6.87	7.10	7.34
		75		5.16	5.36	5.56	5.77	5.97	6.17	6.38	6.59	6.80
		70		4.60	4.79	4.98	5.17	5.36	5.54	5.73	5.91	6.11
		65	4.10	4.29	4.47	4.65	4.82	4.99	5.16	5.33	5.50	5.67
		60	3.79	3.97	4.15	4.31	4.47	4.63	4.78	4.93	5.09	5.24
		50	3.28	3.44	3.60	3.74	3.88	4.01	4.14	4.26	4.38	
		40	2.86	3.01	3.15	3.27	3.39	3.50	3.60			
* ZW79KBE	Q	85		11.68	13.62	15.73	18.06	20.67	23.63	27.00	30.83	35.19
		80		11.99	13.97	16.15	18.59	21.35	24.49	28.08	32.17	36.82
		75		12.34	14.37	16.64	19.21	22.13	25.47	29.29	33.66	38.62
		70		10.83	12.72	14.82	17.19	19.90	23.00	26.56	30.63	35.29
		65	9.20	11.15	13.09	15.29	17.79	20.67	23.97	27.77	32.12	37.09
		60	9.69	11.47	13.47	15.76	18.39	21.43	24.94	28.98	33.61	38.89
		50	10.05	11.93	14.11	16.65	19.61	23.04	27.02	31.61	36.85	
		40	10.02	12.07	14.49	17.34	20.69	24.59	29.10			
	P	85		6.14	6.38	6.62	6.87	7.11	7.36	7.62	7.88	8.15
		80		5.71	5.93	6.16	6.39	6.61	6.84	7.07	7.31	7.55
		75		5.31	5.52	5.73	5.93	6.14	6.35	6.56	6.78	7.00
		70		4.73	4.93	5.13	5.32	5.51	5.70	5.89	6.09	6.28
		65	4.22	4.41	4.60	4.78	4.96	5.14	5.31	5.49	5.66	5.84
		60	3.90	4.09	4.27	4.44	4.60	4.76	4.92	5.08	5.23	5.39
		50	3.38	3.54	3.70	3.85	3.99	4.13	4.26	4.38	4.51	
		40	2.94	3.10	3.24	3.37	3.49	3.60	3.71			

Note: Superheat 5K, Subcooling 10K

\*Preliminary data



# ZWD KBE Heating capacity

R134a 50 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model	Condensing temperature °C	Evaporating temperature °C										
		-10	-5	0	5	10	15	20	25	30	35	40
* ZW125KBE	Q	85		18.17	21.19	24.46	28.08	32.15	36.75	41.98	47.94	54.72
		80		18.65	21.73	25.11	28.91	33.20	38.09	43.66	50.02	57.26
		75		19.19	22.35	25.88	29.87	34.42	39.61	45.56	52.34	60.06
		70		16.84	19.78	23.05	26.74	30.95	35.77	41.31	47.64	54.88
		65	14.31	17.34	20.36	23.78	27.67	32.14	37.28	43.19	49.95	57.68
		60	15.07	17.84	20.95	24.51	28.60	33.33	38.79	45.07	52.27	60.48
		50	15.62	18.55	21.94	25.89	30.49	35.84	42.03	49.15	57.31	
		40	15.58	18.77	22.53	26.97	32.17	38.24	45.26			
	P	85		9.14	9.50	9.87	10.23	10.60	10.97	11.35	11.73	12.13
		80		8.50	8.84	9.18	9.51	9.85	10.19	10.54	10.89	11.25
		75		7.90	8.22	8.53	8.84	9.15	9.46	9.78	10.10	10.43
		70		7.05	7.35	7.64	7.93	8.21	8.50	8.78	9.07	9.36
		65	6.29	6.57	6.85	7.12	7.39	7.65	7.91	8.17	8.43	8.69
		60	5.81	6.09	6.35	6.61	6.85	7.09	7.33	7.56	7.80	8.03
		50	5.03	5.28	5.51	5.74	5.95	6.15	6.34	6.53	6.72	
		40	4.38	4.61	4.82	5.02	5.20	5.37	5.53			
* ZW150KBE	Q	85		21.86	25.50	29.44	33.80	38.69	44.23	50.52	57.70	65.86
		80		22.44	26.15	30.22	34.79	39.95	45.83	52.55	60.20	68.91
		75		23.10	26.90	31.15	35.95	41.42	47.67	54.83	62.99	72.28
		70		20.26	23.80	27.73	32.18	37.25	43.05	49.71	57.34	66.04
		65	17.22	20.86	24.51	28.61	33.30	38.68	44.87	51.97	60.12	69.41
		60	18.14	21.46	25.21	29.49	34.42	40.11	46.68	54.24	62.90	72.78
		50	18.80	22.33	26.41	31.16	36.69	43.13	50.58	59.15	68.97	
		40	18.75	22.58	27.12	32.46	38.72	46.02	54.47			
	P	85		11.01	11.45	11.89	12.32	12.77	13.21	13.67	14.14	14.62
		80		10.24	10.65	11.05	11.46	11.87	12.28	12.69	13.12	13.56
		75		9.52	9.90	10.28	10.65	11.02	11.40	11.78	12.17	12.56
		70		8.49	8.85	9.21	9.55	9.89	10.24	10.58	10.92	11.27
		65	7.57	7.91	8.25	8.58	8.90	9.22	9.53	9.84	10.16	10.47
		60	7.00	7.34	7.66	7.96	8.26	8.55	8.83	9.11	9.39	9.68
		50	6.06	6.36	6.64	6.91	7.16	7.41	7.64	7.87	8.09	
		40	5.28	5.56	5.81	6.04	6.26	6.47	6.66			

Note: Superheat 5K, Subcooling 10K

\*Preliminary data

# ZW KSE Heating capacity

R134a 60 Hz

Q = Heating capacity (kW) P = Input power (kW) Three phase

380V

Model		Condensing temperature °C	Evaporating temperature °C					
			-10	-5	0	5	10	15
ZW72KSE	Q	75			17.92	20.21	22.62	25.07
		70			17.82	20.23	22.78	25.40
		65		15.52	17.76	20.28	22.96	25.73
		60	13.46	15.40	17.72	20.34	23.15	26.05
		55	13.31	15.30	17.69	20.39	23.31	26.36
		50	13.17	15.20	17.65	20.43	23.46	26.63
		40	12.87	14.94	17.49	20.41	23.62	27.01
		30	12.45	14.53	17.14	20.16	23.51	
	P	75			6.76	7.01	7.22	7.40
		70			6.15	6.37	6.57	6.74
		65		5.37	5.59	5.79	5.97	6.15
		60	4.69	4.88	5.07	5.25	5.43	5.61
		55	4.28	4.43	4.59	4.76	4.94	5.13
		50	3.89	4.01	4.16	4.32	4.50	4.71
		40	3.19	3.27	3.39	3.55	3.76	4.02
		30	2.56	2.62	2.74	2.93	3.19	

Note: Superheat 11K, Subcooling 8.3K

EVI Controls:

DLT<115°C, Economizer superheat 6K

DLT>115°C, Adjust the injection volume to control discharge temperature ≤115°C

## Specifications 50 Hz

### ZW(D) KSE KAE

R134a

ZW Series			ZW79KSE	ZW79KAE	ZWD61KAE	ZWD72KAE	ZWD81KAE
Nominal power	HP		7	7	5	6	7
Motor type			TFP		TFD		
Displacement	m³/hr		18.8	18.8	14.4	17.1	18.8
Refrigerant			R134a				
Heating capacity	kW		17.4	16.1	12.2	14.7	16.1
Input power	kW		4.3	4.0	3.0	3.7	4.0
Current	A		10.8	8.8	6.0	9.0	8.8
Mass flow	g/s		83.7	83.5	63.7	75.8	83.5
Locked rotor amps	A		90.5	100	64.0	70.0	100.0
Rated load current	A		14.6	12.1	10.0	10.0	12.1
Max continuous current	A		20.5	17.0	14.0	14.0	17.0
Max operating current	A		14.6	15.0	11.0	12.5	12.1
Oil charge	Initial	L	1.89	1.89	1.89	1.89	1.89
	Replacement refill	L	1.77	1.77	1.77	1.77	1.77
Net weight	kg		41	41	38	40	41

Conditions: ET 5°C, CT 55°C, Superheat 11K, Subcooling 8.3K

# Specifications 50 Hz

## ZW KBE

## R134a

ZW Series			*ZW61KBE	*ZW72KBE	*ZW79KBE	*ZW125KBE	*ZW150KBE
Nominal power	HP		5	6	7	10	12
Motor type			TFP				
Displacement	m³/hr		14.4	17.1	18.8	29.1	35.3
Refrigerant			R134a				
Heating capacity	kW		13.0	15.5	16.6	25.9	31.2
Input power	kW		4.5	5.6	5.7	8.5	10.3
Current	A		9.4	11.5	11.8	17.4	21.2
Mass flow	g/s		72.3	84.3	98	153.3	184.7
Locked rotor amps	A		64	74	100	133	157
Rated load current	A		11.5	11.9	12.7	23.1	25.5
Max continuous current	A		15.3	15.8	17.0	30.8	34.03
Max operating current	A		12.8	12.5	15.3	22.17	30.03
Oil charge	Initial	L	1.89	1.89	1.89	3.25	3.37
	Replacement refill	L	1.77	1.77	1.77	3.14	3.25
Net weight	kg		38	40	41	59.9	64.9

Conditions: ET 10 °C, CT 75 °C, Superheat 5K, Subcooling 10K

\*Preliminary data

# Specifications 60 Hz

## ZW KBE

## R134a

## ZW KS(E)

## R134a

ZW Series			*ZWD61KBE	*ZWD72KBE	*ZWD81KBE
Nominal power	HP		5	6	7
Motor type			TFP		
Displacement	m³/hr		14.4	17.1	18.8
Refrigerant			R134a		
Heating capacity	kW		13.0	15.5	16.6
Input power	kW		4.5	5.6	5.7
Current	A		9.4	11.5	11.8
Mass flow	g/s		72.3	84.3	98
Locked rotor amps	A		64	74	100
Rated load current	A		11.5	11.9	12.7
Max continuous current	A		15.3	15.8	17.0
Max operating current	A		12.8	12.5	15.3
Oil charge	Initial	L	1.89	1.89	1.89
	Replacement refill	L	1.77	1.77	1.77
Net weight	kg		38	40	41

Conditions: ET 10 °C, CT 75 °C, Superheat 5K, Subcooling 10K

\*Preliminary data

ZW Series			ZW72KSE
Nominal power	HP		6
Motor type			TF7
Displacement	m³/hr		20.6
Refrigerant			R134a
Heating capacity	kW		20.4
Input power	kW		4.8
Current	A		8.8
Mass flow	g/s		92.6
Locked rotor amps	A		94.3
Rated load current	A		12.5
Max continuous current	A		17.5
Max operating current	A		12.7
Oil charge	Initial	L	1.89
	Replacement refill	L	1.77
Net weight	kg		40

Conditions: ET 5 °C, CT 55 °C

Superheat 11K, Subcooling 8.3K

## General information

Technical data are correct at the time of printing. Updates may occur, and should you need confirmation of a specific value, please contact Emerson clearly stating the information required.

Emerson cannot be held responsible for errors in capacities, dimensions, etc., stated herein. Products, specifications and data in this literature are subject to change without notice.

The information given herein is based on data and tests which Emerson believes to be reliable and which are in accordance with today's technical knowledge. It is intended for use by persons having the appropriate technical knowledge and skill, at their own discretion and risk. Our products are designed and adapted for fixed locations. For mobile applications, failures may occur.

The suitability for this has to be assured from the plant manufacturer, which may include making appropriate tests.

### Note:

The components listed in this catalogue are not released for use with caustic, poisonous or flammable substances. Emerson cannot be held responsible for any damage caused by using these substances.

## About Emerson

Emerson (NYSE: EMR), headquartered in St. Louis, Missouri (USA), is a global technology and engineering company providing innovative solutions for customers in industrial, commercial, and residential markets. Our Emerson Automation Solutions business helps process, hybrid, and discrete manufacturers maximize production, protect personnel and the environment while optimizing their energy and operating costs. Our Emerson Commercial and Residential Solutions business helps ensure human comfort and health, protect food quality and safety, advance energy efficiency, and create sustainable infrastructure. For more information visit [Emerson.com](https://www.emerson.com).

## Notes

## Notes

# Contact lists

## Asia Pacific Headquarters

Suite No. 2503-10A, 25/F,  
Exchange Tower, 33 Wang Chiu Road,  
Kowloon Bay, Kowloon, Hong Kong  
Tel: (852) 2866 3108  
Fax: (852) 2520 6227

## Australia

356 Chisholm Road  
Auburn NSW 2144, Australia  
Tel: (612) 9795 2800  
Fax: (612) 9738 1699

## China - Beijing

Room 1203-1205,  
North Wing Junefield Plaza Central Tower,  
No. 10 Xuan Wu Men Wai Street,  
XiCheng District, Beijing, PRC  
Tel: (8610) 5095 2188

## China - Guangzhou

Guangzhou Office  
Unit 2202B, 22/F, Leatop Plaza,  
32 Zhujiang East Road, Tianhe Dist.,  
Guangzhou 510623, PRC  
Tel: (8620) 8595 5188

## China - Shanghai

Shanghai Sales Office  
7F, Emerson Building, 1582 Gumei  
Rd, Shanghai, PRC  
Tel: (8621) 3338 7333

## India - Mumbai

Delphi B-Wing, 601-602, 6th Floor  
Central Avenue,  
Hiranandani Business Park,  
Powai, Mumbai 400076, India  
Tel: (9122) 6786 0793  
Fax: (9122) 6662 0500

## India - Pune

Plot No. 23, Rajiv Gandhi Infotech Park,  
Phase - II, Hinjewadi,  
Pune 411 057, Maharashtra, India  
Tel: (9120) 4200 2000  
Fax: (9120) 4200 2099

## Indonesia

BSD Taman Tekno 8  
Jl. Tekno Widya Blok H10 No 2 & 3  
Tangerang Selatan 15314  
Indonesia  
Tel: (6221) 2966 6242  
Fax: (6221) 2966 6245

## Japan

Shin-yokohama Tosho Building  
No. 3-9-5 Shin-Yokohama, Kohoku-ku  
Yokohama 222-0033 Japan  
Tel: (8145) 475 6371  
Fax: (8145) 475 3565

## Malaysia

Level M2, Blk A, Menara PKNS-PJ  
Jalan Yong Shook Lin  
46050 Petaling Jaya, Selangor, Malaysia  
Tel: (603) 7949 9222  
Fax: (603) 7949 9333

## Middle East & Africa

PO Box 26382  
Jebel Ali Free Zone - South  
Dubai, UAE  
Tel: (9714) 811 8100  
Fax: (9714) 886 5465

## Philippines

10/F SM Cyber West Avenue, EDSA cor.  
West Avenue, Barangay Bungad,  
Diliman, Quezon City 1105 Philippines  
Tel: (632) 689 7200

## Saudi Arabia

PO Box 34332 - 3620 Building 7874  
Unit 1, 67th street 2nd Industrial City  
Dammam, Saudi Arabia  
Toll Free: 800 844 3426  
Tel: +966 3 8147560  
Fax: +966 3 8147570

## South Korea

3F, The Pinnacle Gangnam  
343, Hakdong-ro, Gangnam-gu,  
Seoul 06060, Republic of Korea  
Tel: (822) 3483 1500  
Fax: (822) 592 7883

## Taiwan

3F No. 122 Lane 235,  
Pao Chiau Rd., XinDianv Dist.,  
New Taipei City 23145, Taiwan (R.O.C.)  
Tel: (8862) 8912 1360  
Fax: (8862) 8912 1890

## Thailand

34th Floor, Interlink Tower,  
1858/133, Bangna Trad,  
Bangkok 10260, Thailand  
Tel: (662) 716 4700  
Fax: (662) 751 4241

## United Arab Emirates

Jebel Ali Free Zone  
PO Box 26382  
Dubai UAE  
Toll Free: 800 441 3428  
Tel: +971 4 811 8100  
Fax: +971 4 886 5465

## Vietnam

Level 6, Melinh Point Tower,  
2 Ngo Due Ke,  
District 1, Ho Chi Minh City  
Vietnam  
Tel: (84) 908 009 189

Scan to visit:



Emerson Asia

**Emerson.com**

Asia 01 00 Issued 9/2019 Emerson is a trademark of Emerson Electric Co. or one of its affiliated companies.  
©2019 Emerson Electric Co. All rights reserved.



@EmersonComResAP

EMERSON. CONSIDER IT SOLVED.™