



**NEWEX INTERNATIONAL CO., LTD**

**PHILEXI is a trademark of NEWEX INTERNATIONAL CO., LTD**

***Hongkong Office Address:***

FLAT/RM 02, 7/F, SPA CENTRE,  
NO.53-55 LOCKHART ROAD,  
WAN CHAI, HONG KONG

Sourcing Manager/ Sales Manager: Mr. Justin

Whatsapp/Mobile/Wechat: +8613928822021

Skype ID: liangshizong

Email: justin@philexi.com, justin.liang@newexintl.com

***Guangzhou Office Address:***

Room 505, BLDG A, Hengda Business  
Center, 3rd Bigui Road, Luopu Street,  
Panyu District, Guangzhou, China

# ROTARY COMPRESSOR 2020

旋转式压缩机  
产品手册

**GMCC**  
用芯创造未来



**GMCC**  
CREATE FUTURE WITH CORE

本资料相关技术数据仅供参考，实际数据以我司最新的产品规格书为准  
The data of this catalog is for reference only, the actual data is subject to  
the latest specification document  
品牌整合推广：川上（中国）品牌管理有限公司 020-34354269



环保纸张  
可回收资源  
Recyclable  
Made From Recycled Content


本手册印制于2019年12月 This manual was printed in Dec. 2019.

# CONTENTS 目录



01

公司简介  
COMPANY PROFILE



07

智能制造  
SMART MANUFACTURE



09

绿色潜能  
GREEN POTENTIALS



16

产品应用领域  
PRODUCT APPLICATION FIELD



03

绿色里程  
GREEN MILE




11

品牌影响力  
BRAND INFLUENCE



13

产品命名规则  
TYPE DESIGNATION



05

绿色科技  
GREEN TECHNOLOGY



15

压缩机产品系列型谱  
COMPRESSOR SERIES LINEUP



17

环保冷媒空调压缩机  
GREEN REFRIGERANT  
COMPRESSOR

23

变频空调压缩机  
INV COMPRESSOR

25

R410A定速空调压缩机  
R410A AIR-CONDITIONER  
COMPRESSOR



38

制冷量测试条件  
REFRIGERATING CAPACITY  
TEST CONDITION



30

R22定速空调压缩机  
R22 AIR-CONDITIONER  
COMPRESSOR



34

T3空调压缩机  
T3 AIR-CONDITIONER  
COMPRESSOR



37

除湿机用压缩机  
DEHUMIDIFIER COMPRESSOR



39

压缩机标准包装  
COMPRESSOR  
STANDARD PACKAGE



40

压缩机标准附件  
COMPRESSOR  
ACCESSORIES



40

联系我们  
CONTACT US





# COMPANY PROFILE

## 公司简介

### 我们的企业

#### Company

GMCC于1995年创建于广东顺德，是一家专业化研发、生产、销售旋转式、往复式等冷冻冷藏、环境空气调节用压缩机的精密制造企业；

Founded in 1995, GMCC is a precision manufacturing company engaged in R&D, production and sales of rotary compressor and reciprocating compressor for cold storage and air conditioning.

### 我们的产品应用

#### Product

产品广泛应用于中央空调、家用电器和汽车等领域，如各类空调、冰箱、冷柜、热泵热水器、除湿机、干衣机、冷藏汽车、饮水机设备等；

The products are widely used in the fields of central air conditioner, household appliances and automobiles, such as air conditioners, refrigerators, refrigerated cabinets, heat-pump water-heaters, dehumidifiers, dryers, refrigerated cars, water dispensing equipment, etc.

### 我们的体系

#### Market

GMCC在全球拥有五大研发试验中心，5个工厂；2019冷年产销空调压缩机7250万台、冰箱压缩机2727万台。

Five R&D centers and five plants around the globe, GMCC achieved production and sales of 69.5 million sets of A/C compressor and 20.1 million sets of refrigerator compressor in 2019 refrigeration year.

# GMCC



### 五大研发试验中心，已获得共2700多项专利

#### 5 R&D centers, 2700 patents




### 5个智能工厂，400多台工业机器人

#### 5 intelligent factories, 400+ industrial robots



# GREEN MILE

## 绿色里程

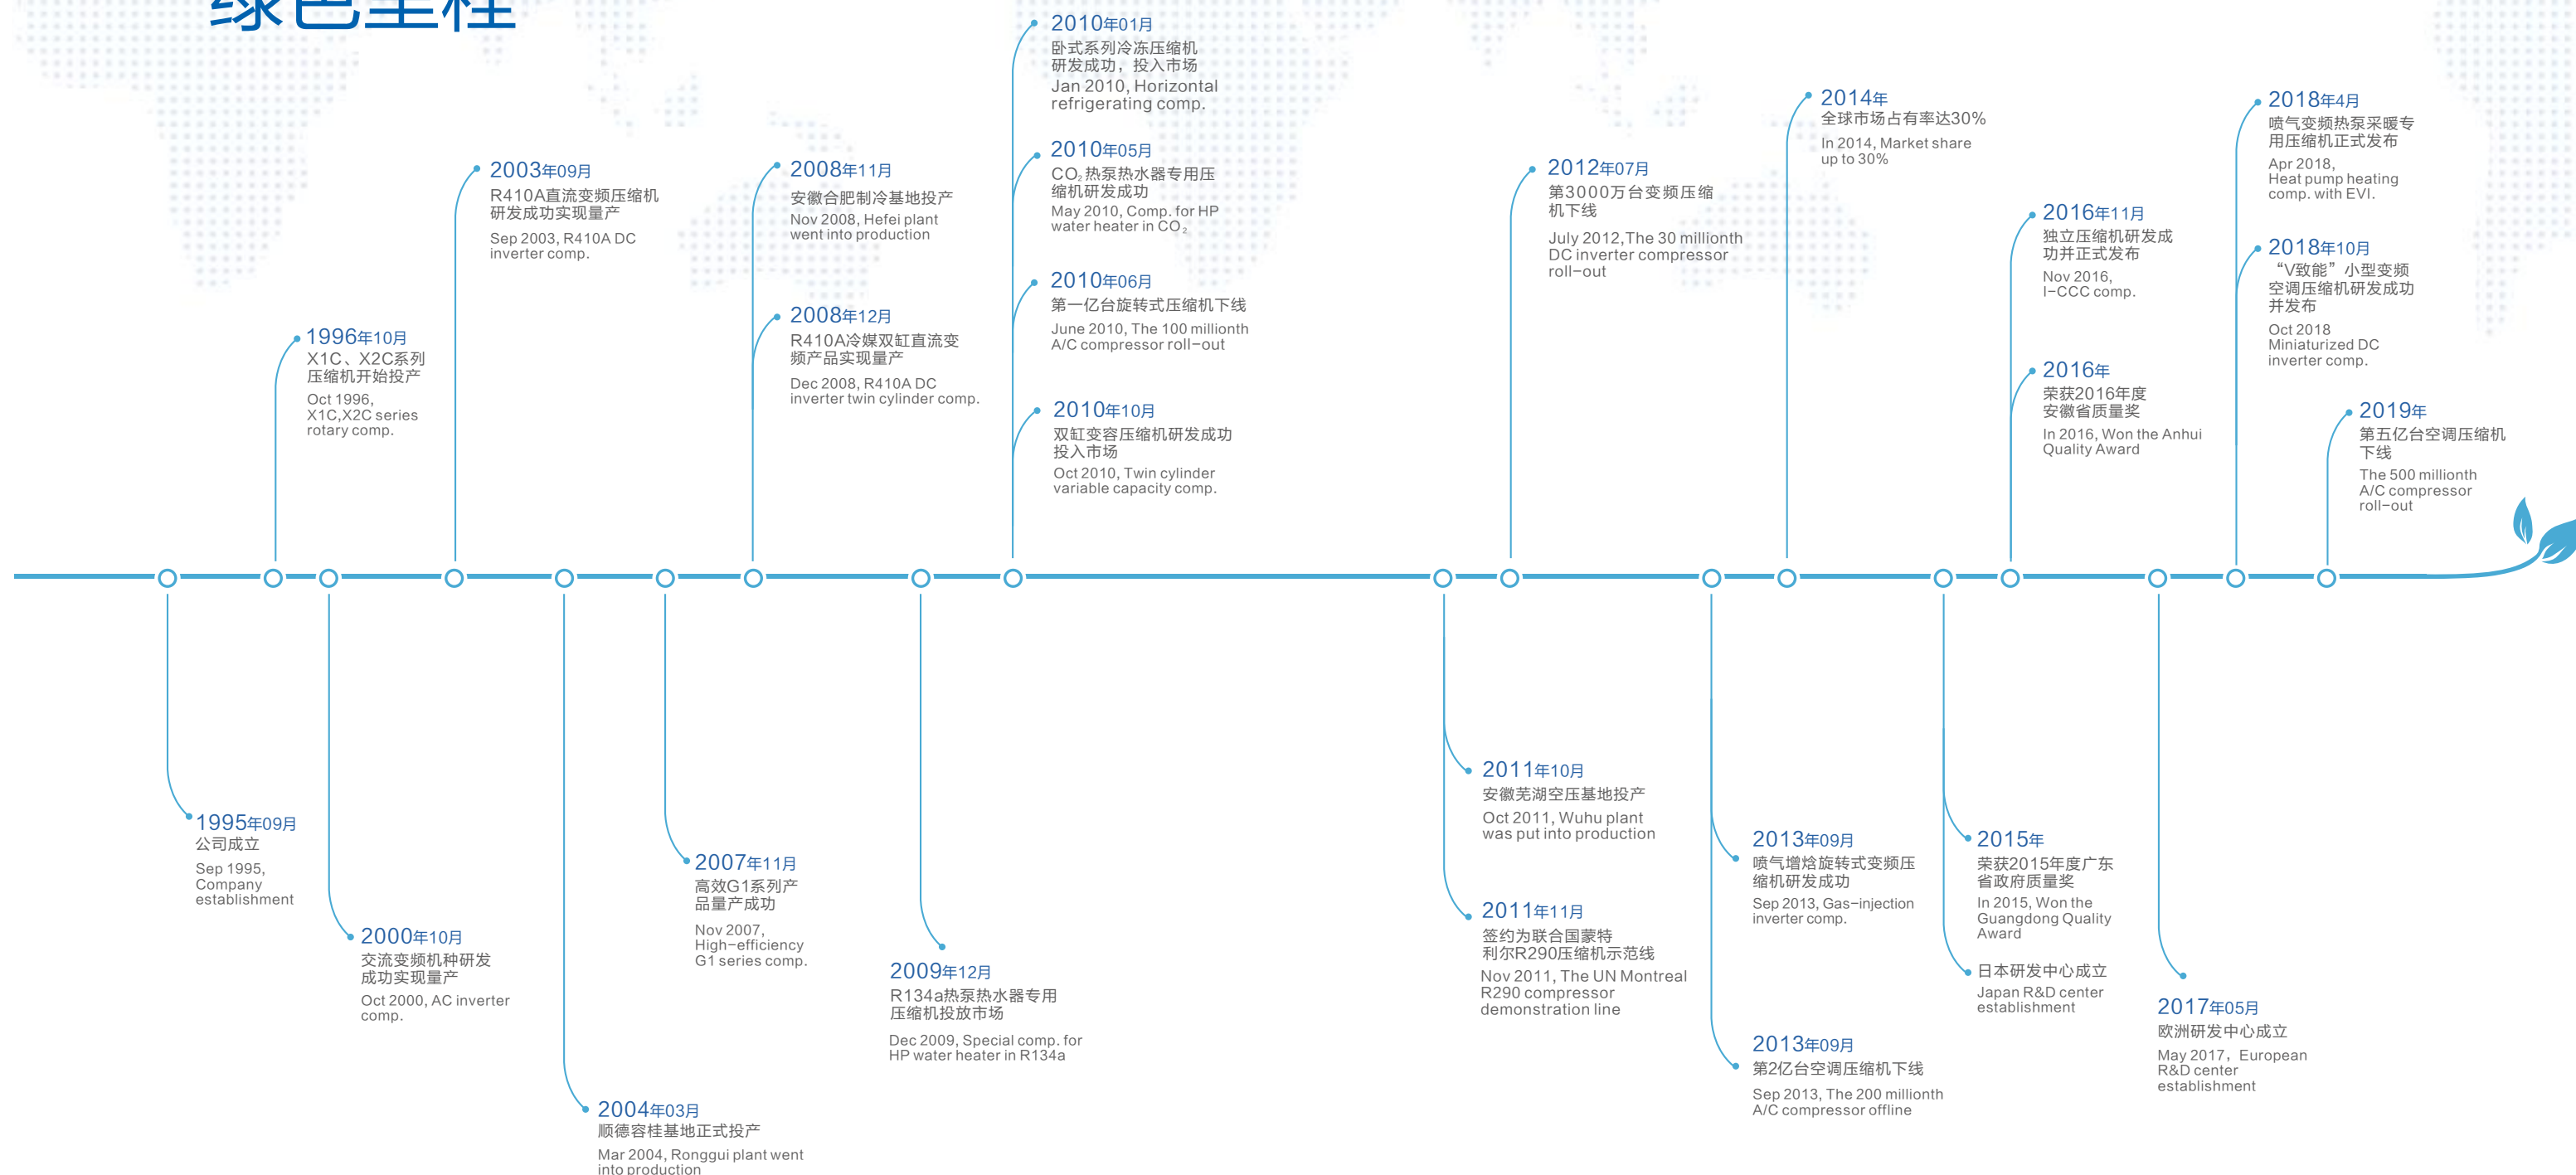



# GREEN TECHNOLOGY

## 绿色科技

GMCC产品能效每年提升3%，为世界各地提供高效、节能、环保、低噪的绿色压缩机动力核心。

With energy efficiency of GMCC products improved by 3% every year, GMCC provides customers worldwide with high-efficiency, eco-friendly, and low-noise green compressor cores.

### 创新驱动

Innovation Driven

为保持核心科技竞争力，GMCC持续投入大量科研资源，其研发测试中心配备了400多套价值超过2亿元的全套实验测试分析系统和实验室，通过国家实验室认证和UL CTDP认证。

In order to maintain its core technologic competitiveness, GMCC continues to invest a large amount of resources to scientific research. Its R&D testing center is equipped with more than 400 sets of experimental test and analysis systems and laboratories worth over 200 million Yuan. The center is both CNAS and UL CTDP certificated.

### 技术路线

Technical Route

GMCC坚持绿色科技路线，不断在环保、高效、小型、智能和静音等方面进行技术研发和产品升级。与10年前相比，GMCC压缩机如今的能效提升超过10%，每年可节省50亿度电，相当于1/9个大亚湾核电站。

Persisting in green technologic route, GMCC continues to develop and upgrade its products regarding eco-friendliness, efficiency, size, intelligence and noise. Compared with products 10 years ago, the energy efficiency of present GMCC compressors has been improved by more than 10%, and 5 billion kilowatt hour can be saved each year which is equal to 1/9 of the energy generated by Daya Bay Nuclear Power Plant.



### 绿色芯

Green Core

GMCC始终坚持研究环保冷媒应用，近十年来先后率先推出R407C、R410A、CO<sub>2</sub>、R290和R32等环保冷媒压缩机产品。其R290压缩机联合国示范生产线已于2014年底成功验收，正为世界各地量产型谱全面、应用广泛的R290压缩机。

GMCC has long been involved in research and application of environment-friendly refrigerants, and has successively released the first compressor products featuring R407C, R410A, CO<sub>2</sub>, R290, R32 and other green refrigerants in the past decade. Its United Nations exemplary R290 compressor production line passed acceptance inspection at the end of 2014, and is now producing widely-used R290 compressors of various types and models in large volumes for customers from all over the world.



### 智慧芯

Wisdom Core

早在2003年，GMCC就推出了R410A直流变频压缩机。近年来，GMCC不断创新研发节能变频技术，先后推出双缸变频、变频变容、喷气增焐、全能耦合和独立压缩等新品，为空调行业的变频化发展不断贡献力量。

GMCC launched the first R410A DC inverter compressor as early as 2003. In recent years, thanks to its consistent efforts in innovation and R&D on energy-saving inverter technologies, GMCC has successively rolled out new products featuring technologies such as double-cylinder frequency conversion, variable frequency and capacitance, enhanced vapor injection, all-round coupling, independent compression, etc., and in this way, GMCC has been constantly making its contribution to the popularization of frequency conversion technologies in the air conditioning industry.



### I-CCC 独立压缩

I-CCC

I-CCC是GMCC近年来的明星产品之一，独立压缩技术创新空调能效解决之道，通过独立压缩闪发气体有效改善喷气循环能效，实现变频空调系统APF能效提升11%以上。

I-CCC is one of the star products of GMCC in recent years. The independent compression technology innovates the energy-efficient solution of air conditioners. With the aid of independent compression of flash gas, the energy efficiency of jet cycle is effectively improved, and the APF energy efficiency of the inverter air-conditioning system is thereby increased by more than 11%.





# SMART MANUFACTURE

## 智能制造



不断提高精益制造水平，创新生产工艺，打造智能工厂，GMCC生产效率每年提升10%以上。

With continuous increased refined manufacturing level, innovative production process, and intelligent plant, GMCC's production efficiency gets more than 10% improvement each year.

### (一) 信息化

一体化精益信息体系，全面支撑业务。GMCC 建成以计划驱动、采购协同、物流配合、制造执行的闭环制造协同体系，初步实现集成化、可视化、信息化的敏捷型数字工厂，产品交期、库存和操作人员大幅减少。



#### (A) Informatization

An integral lean information system lays a solid foundation for GMCC's entire business. GMCC has constructed a closed-loop manufacturing collaboration system featuring plan driving, purchase synergy, logistic coordination and manufacturing execution, and achieved a prototype of an agile digital factory boasting integration, visualization and informatization, thereby significantly reducing product delivery time, stock as well as the number of operators.

### (二) 自动化

GMCC规模化应用人机交互作业，以RGV代替人工推送物料，视觉CGV代替人工识别，通过物流自动化、生产自动化和检测自动化，在压缩机生产中完成了自动化系统突破，使GMCC在规模、效率、品质、成本等各方面获得更大提升。



#### (B) Automation

GMCC applies man-machine interactive operation in large scale. With manual material pushing replaced by RGV, manual recognition replaced by visual CGV, and logistics/production/test automated, compressor production becomes automated, and GMCC scale, efficiency, quality, and cost obtain significant improvement.

### (三) 品质管控

GMCC建立起了科学、准确、高效的产品检验体系，以保证产品的卓越品质。经过至少81道检验测试的磨练，通过2000小时以上持续运行的考察，GMCC产品的性能和品质得到了充分的验证，低于9PPM的产品工程下线率，保障压缩机在恶劣工况下10年强劲运行。



#### (C) Quality control

GMCC builds a scientific, accurate, and efficient product inspection system to ensure product quality. With more than 81 tests and more than 2000h continuous running, GMCC product performance and quality get sufficient guarantee, the engineering offline rate below 9PPM, ensuring that the compressors can run 10 years long under extreme conditions.

### (四) 节能减排

GMCC建立了完善的能源管理制度，将能源消耗指标纳入部门考核中。通过中水回用、中央空调节能改造、生物质锅炉节能改造、空压机集成控制改造、中外炉余热利用改造等项目，年动力费单耗下降2%。



#### (D) Energy saving and emission reduction

GMCC has established perfect energy management systems, and the energy consumption indices are integrated to department check. GMCC promotes projects in production such as use of reclaimed water, energy-saving rebuilding of central air conditioning, energy-saving rebuilding of biomass boilers, rebuilding of compressor integration control, rebuilding of residual heat of boilers and so on. GMCC's yearly unit expenditure on power decreases by 2%.



# GREEN POTENTIALS

## 绿色潜能

GMCC坚持可持续发展和绿色发展，提升产品综合竞争力，与上下游合作伙伴携手激发产业链潜能。

GMCC persists in sustainable development and green development to improve comprehensive competitiveness of products and cooperates with upstream and downstream partners to stimulate potential energy of the industry chain.

### （一）产学研智冷链

GMCC与国内外整机厂商、配套供应商、研究机构及高等院校等保持紧密交流，从理论分析、部品材料、系统设计和研发设备等方面深入协作，构建制冷产业链的产学研合作，输出群体智慧，全面开发和应用压缩机创新技术。

#### （A）Cold chain of production, university, research, and intelligence

GMCC maintains close exchanges with machine manufacturers, supporting suppliers, research institutes and colleges and universities both at home and abroad, implements in-depth cooperation in terms of theoretical analysis, parts and materials, system design and R&D equipment to build a production/university/research cooperation of the cooling industry, and outputs group wisdom to fully develop and apply compressor innovations.

### （二）客户战略合作

GMCC构建客户导向型技术研发体系，积极与客户建立联合实验室，配套开发技术，推进快速投市。近年来，GMCC独立压缩技术、喷气增焓技术、R290和R32环保冷媒技术分别助力客户在绿色智能家电市场赢得先机。

#### （B）Strategic cooperation with customers

GMCC builds a customer-oriented technical R&D system and founds a laboratory with customers to quicken listing using the laboratory and supporting development technologies. In recent years, the independent compression technology of GMCC, jet enthalpy technology, and R290 and R32 eco-friendly refrigerant technology help customers win opportunities in the green and intelligent household appliances market.

### （三）精益价值链

GMCC一贯强调产业链价值增值，与全链供应商深度合作，分享精益管理与技术、最新市场信息等，协助供应商不断改进品质、提升管理水平、享受精益成果。以此更形成链条合力，打造出更大规模、多赢的体系化竞争优势。

#### （C）Lean value chain

GMCC has always emphasized the value added in the industry chain, and cooperated deeply with the whole chain suppliers to share lean management and technology, the latest market information, etc., and to help suppliers continuously improve quality, promote management level and enjoy lean results. In this way, the chains will be combined to create a larger and multi-win systematic competitive advantage.



# BRAND INFLUENCE

## 品牌影响力

GMCC坚持在全球制冷行业平台分享技术和产品，为世界家电提供节能、环保、高效、可靠的核芯部件。

GMCC always shares technologies and products through the global cooling industry platform, and provides the household industry with core components that are energy efficient, eco-friendly, efficient, and reliable.

### (一) 全球巡展

数年来持续以绿色创新、技术领先形象亮相的GMCC，已成为全球各大制冷展会的一道特色风景线。从中国出发，历经美国AHR、意大利MCE、德国CHILLVENTA、印度ACREX、泰国RHVAC和巴西FEBRAVA等全球重量级展会，GMCC品牌印记遍布全球。

#### (A) Global Tour

Over the past few years, GMCC has been continuing with a green innovative and technical leading image, and has become a unique landscape in different major refrigeration shows around the world. Starting from China, GMCC leaves its brand mark in heavyweight exhibitions all over the world, including American AHR, Italian MCE, Germanic CHILLVENTA, Indian ACREX, Thailand RHVAC, and Brazilian FEBRAVA.



### (二) 行业分享

作为行业技术先锋，GMCC近年来不断受邀成为国际天然制冷剂大会、亚洲制冷与空调大会、中国家电技术大会、中国制冷学术年会及中国家电产业链大会等行业平台的协办单位，探讨行业技术发展方向，分享创新技术成果，推动行业技术升级。

#### (B) Industry Sharing

As a technologic pioneer in the industry, GMCC has been continuously invited in recent years as a co-organizer of the IIR-Gustav Lorentzen Conference on Natural Refrigerants, Asian Conference on Refrigeration and Air-Conditioning, China Household Appliances Technology Conference, Annual Meeting on Refrigeration of China, and Industrial Chain Conference on Household Appliances of China, discussing technical development direction of the industry, sharing technological achievements of innovations, and promoting technology upgrade of the industry.



### (三) 联合营销


GMCC与客户保持深度战略合作，进行联合市场营销，合作推广品牌和产品。2013年，GMCC推出空调压缩机“十年包换”品质服务政策；同年联合TCL推出“十年包换”落地服务，为彼此市场拓展和品牌形象带来重大价值。

#### (C) Joint Marketing


GMCC maintains in-depth strategic cooperation with its customers and conducts joint marketing to promote brands and products. In 2013, GMCC launched its "10-year replacement" service policy for air-conditioning compressors. In the same year, GMCC cooperated with TCL to launch the "10-year replacement" door-to-door service, bringing significant value to mutual market expansion and brand image.



压缩机命名规则（一）  
TYPE DESIGNATION(A)

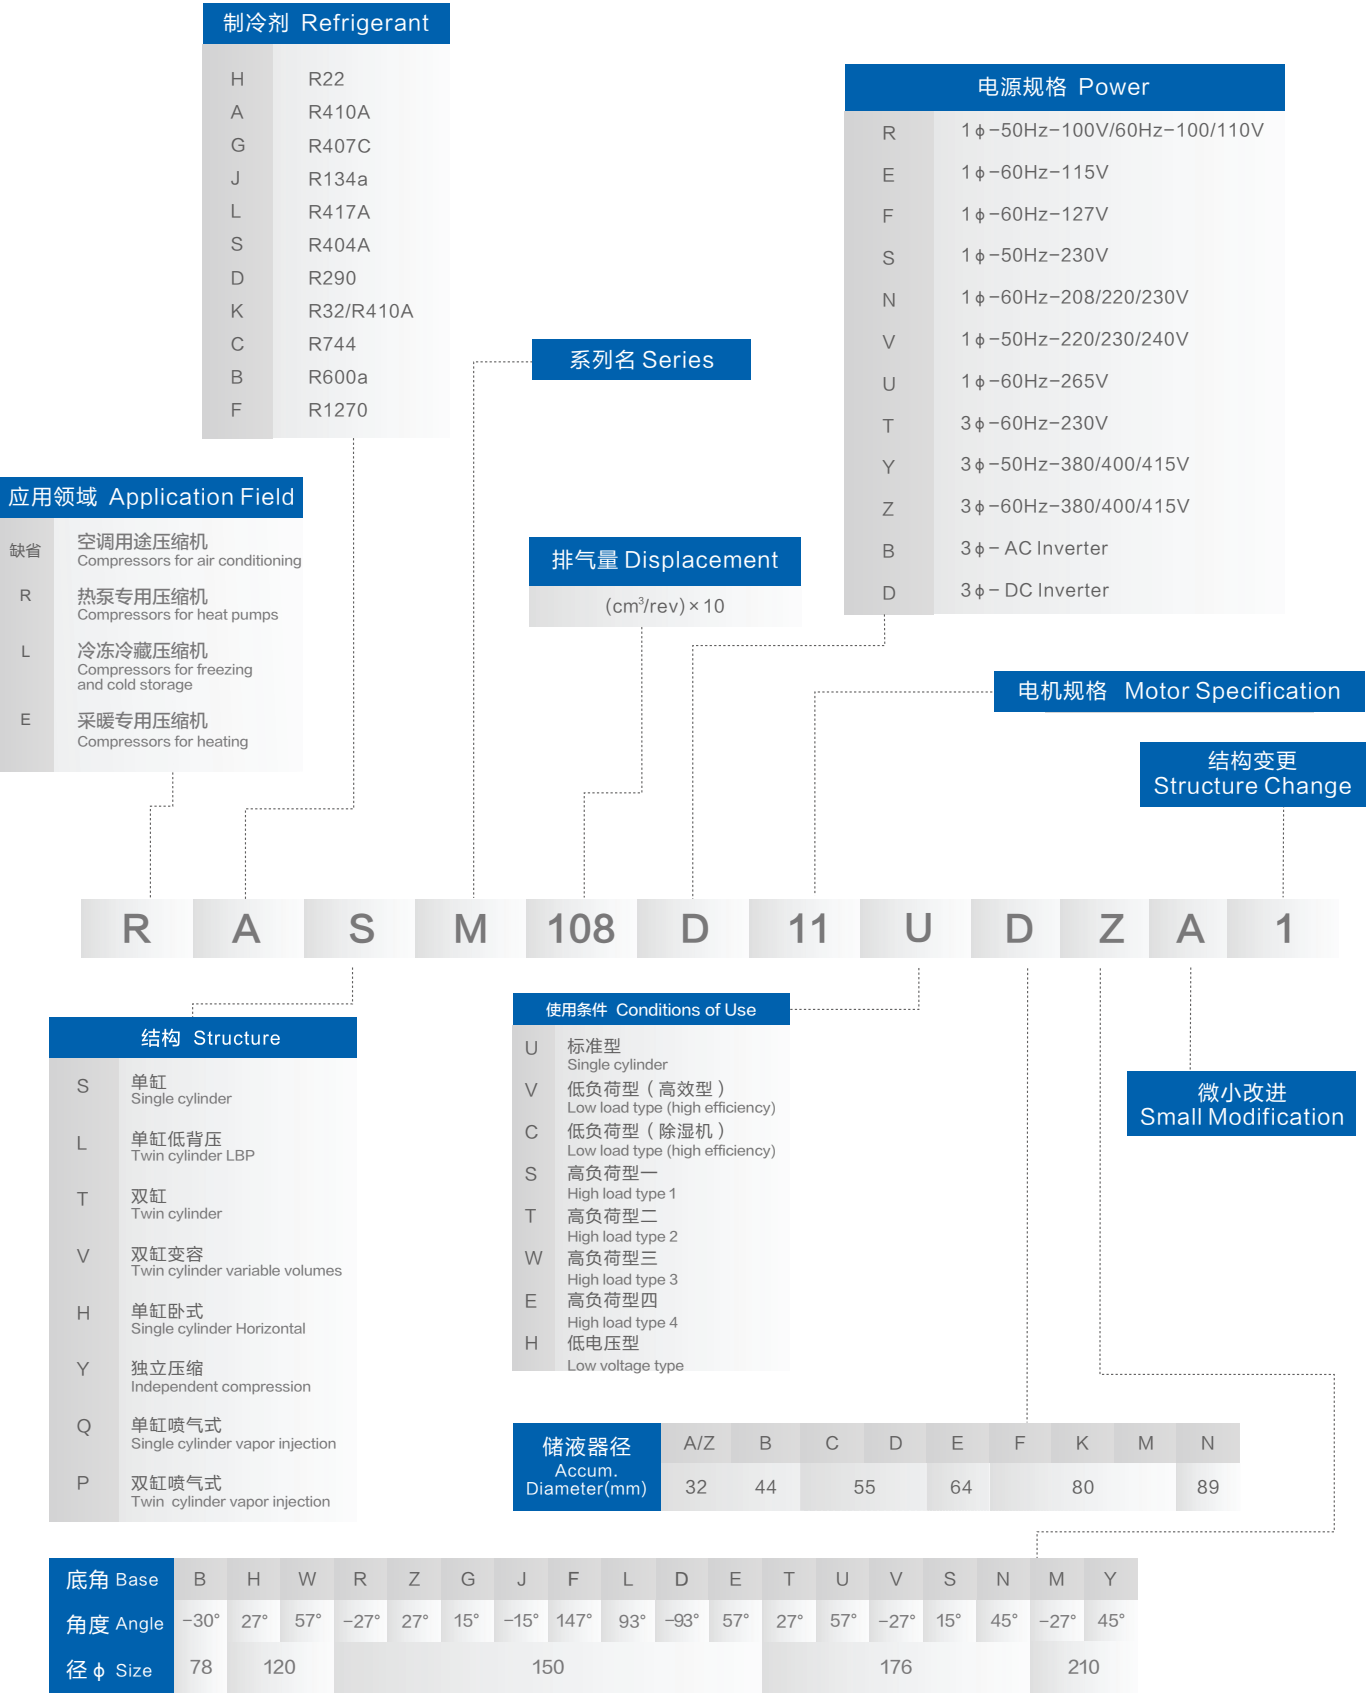

压缩机命名规则（二）  
TYPE DESIGNATION(B)

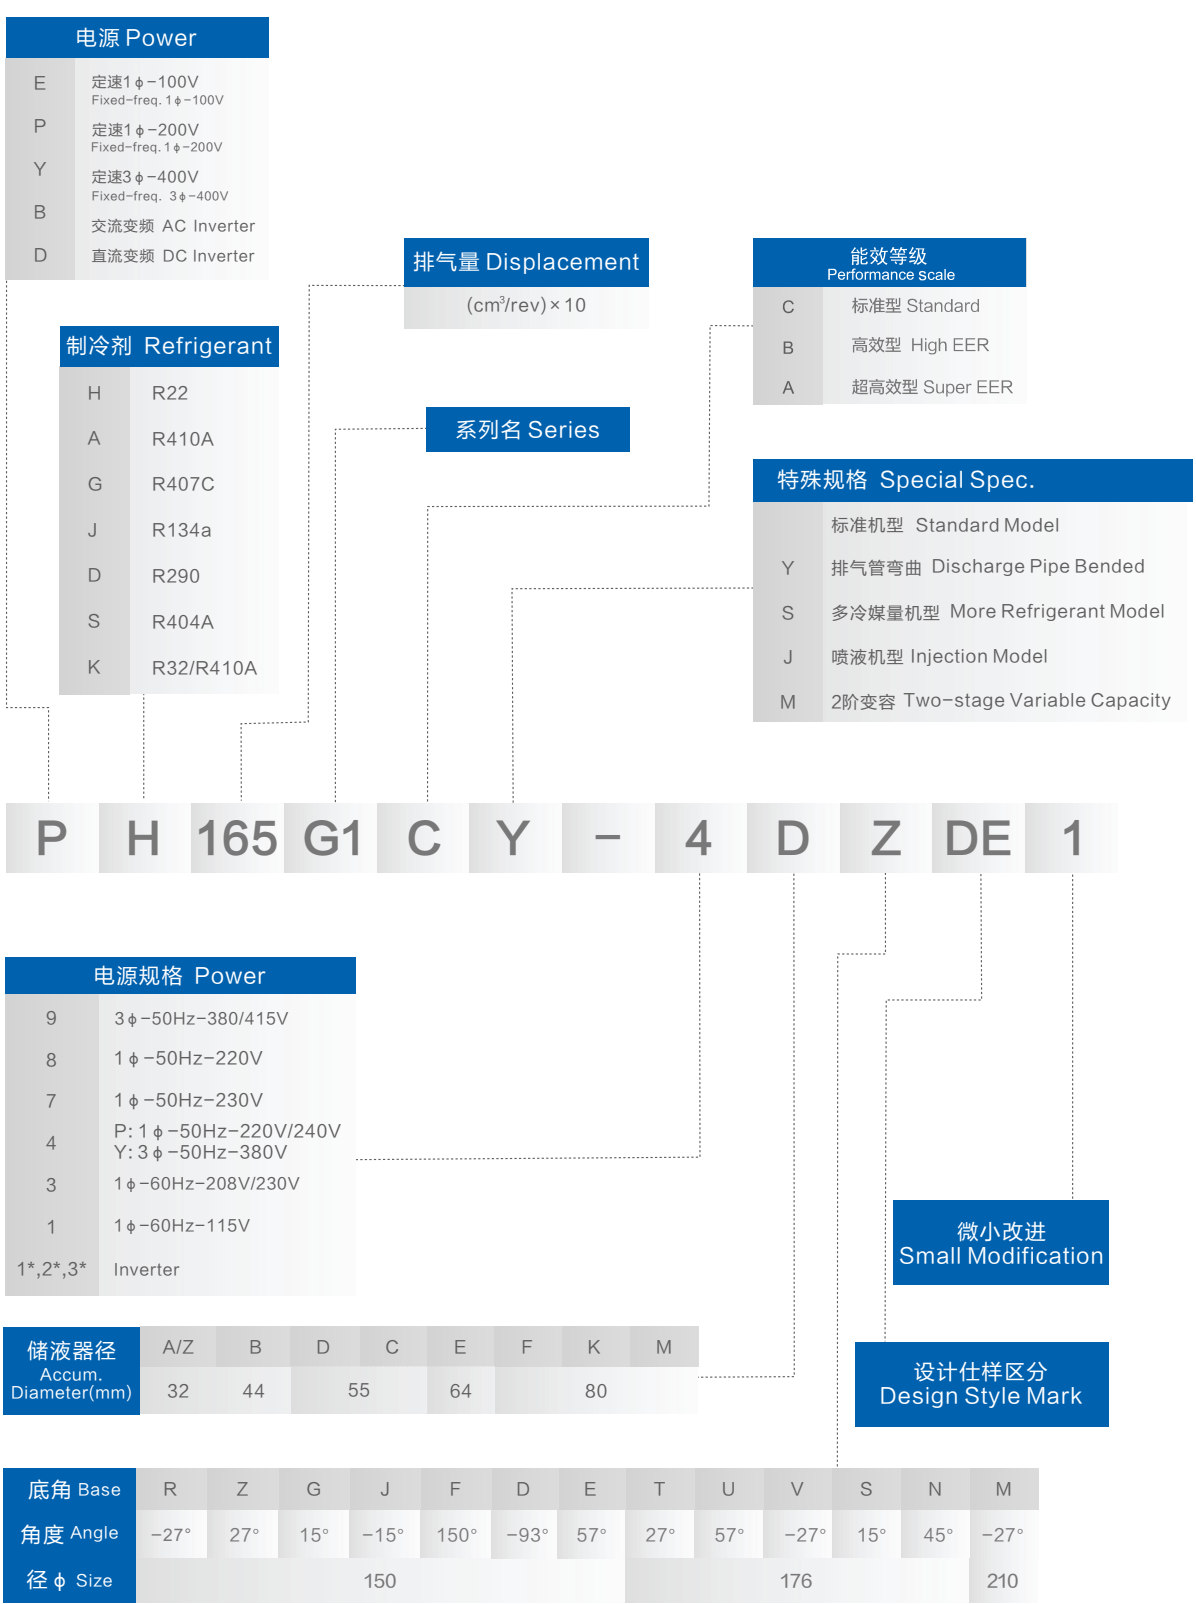



压缩机产品系列型谱  
COMPRESSOR SERIES LINEUP

产品类别 Type			压缩机能力范围 Compressor capacity range																				认证 Certificate	
冷媒 Refrigerant	频率 Frequency	电压 Voltage	kw	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0	15.0	16.0	17.0	18.0	19.0		20.0
			kBtu/h	3.4	6.8	10.2	13.6	17.1	20.5	23.9	27.3	30.7	34.1	37.5	40.9	44.3	47.7	51.2	54.6	58.0	61.4	64.8		68.2
R22	50Hz	220/240V	<div></div> ( 4900~52200 BTU/h )																				CCC TUV	
		T3 220/240V	<div></div> (12000~26000 BTU/h)																				TUV	
	60Hz	208/230V	<div></div> ( 5600~27600 BTU/h )																				UL CUL	
		T3 208/230V	<div></div> ( 14000~26800 BTU/h )																				TUV	
R410A	50Hz	220/240V	<div></div> ( 3000~62600 BTU/h )																				TUV CCC	
		T3	<div></div> ( 12000~36000 BTU/h )																				TUV	
	60Hz	115V	<div></div> (5000~15500 BTU/h)GX																				UL CUL	
		208/230V	<div></div> ( 5300~37000 BTU/h )																				UL CUL	
		T3	<div></div> ( 10000~32500 BTU/h )																				TUV	
		DC Inverter	<div></div> ( 7600~63000 BTU/h )																				TUV CCC	
R134a	50Hz	220/240V	<div></div> (2800~13700 BTU/h)																				TUV CCC	
R404A	50Hz	220/240V	<div></div> (2800~4500 BTU/h)																				-	
R290	50Hz	220/240V	<div></div> (7600~21000 BTU/h)																				TUV CCC	
	DC Inverter		<div></div> (9800~15000 BTU/h)																				TUV CCC	
R32	50Hz	220/240V	<div></div> ( 3900~30500 BTU/h )																				TUV CCC	
	DC Inverter		<div></div> (7000~47000 BTU/h)																				TUV CCC	

PRODUCT APPLICATION FIELD

产品应用领域



环保冷媒空调压缩机  
GREEN REFRIGERANT COMPRESSOR

系列 Series	代表机型 Typical Model	排量 Displ. (cc)	制冷量 Cooling Capacity (W) I (Btu/h)	功率 Power (W)	能效比 COP (W/W)	电容 Capacitor (μ F/V)	压缩机高度 Compressor Height (mm)	排气管内径 Discharge Pipe ID (mm)	回气管内径 Suction Pipe ID (mm)	备注 Remark
--------------	-----------------------	----------------------	--	--------------------	---------------------	----------------------------	------------------------------------	------------------------------------	----------------------------------	--------------

R290

1ϕ-50Hz-220/240V

测试条件: ASH Test Condition: ASH

SN	DSN86V11UZDX	8.6	1300	4436	440	2.95	15/370	225	6.53	9.8	
	DSN98V11UZZS	9.8	1480	5050	475	3.12	25/370	250	6.53	9.8	
	DSN118V11UZDX	11.8	1790	6107	582	3.08	20/370	240	6.53	9.8	
SM	DSM155V12UDZ	15.5	2275	7762	685	3.32	25/370	292	8.1	9.8	
	DSM155V13UCZH	15.5	2300	7847	708	3.25	25/370	260	8.1	9.8	
	DSM165V12UDZ	16.4	2455	8376	732	3.35	25/370	292	8.1	9.8	
	DSM170V13UCZH	16.9	2525	8615	765	3.30	30/370	260	8.1	9.8	
	DSM180V11UDZ	17.9	2675	9127	805	3.32	25/370	292	8.1	9.8	
	DSM215V2UDT	21.4	3170	10816	960	3.30	35/370	300	8.1	9.8	
	DSM225V1UDZ	22.5	3315	11311	1010	3.28	35/370	300	8.1	9.8	
	DSM240V1UDZ	24.0	3560	12146	1080	3.30	35/370	300	8.1	9.8	
	DSM240V1UDZ	24.0	3560	12146	1080	3.30	35/370	300	8.1	9.8	
SF	DSF240V1UFT	24.0	3600	12283	1070	3.36	35/370	314	8.1	12.9	
	DSF340V1UFT	34.0	5080	17333	1530	3.32	40/400	320	8.1	12.9	▲

测试条件: GX Test Condition: GX

SM	DSM135V11VDZ	13.3	2240	7643	510	4.39	20/370	292	8.1	9.8	
SG	DSG310V1UFT	31.0	5220	17811	1160	4.50	55/400	305	9.8	12.9	▲
	DSG320V1UFT	32.0	5420	18493	1200	4.52	55/400	305	9.8	12.9	▲

1ϕ-50Hz-230V

测试条件: ASH Test Condition: ASH

SG	DSG310S1UFT	30.8	4640	15832	1345	3.45	55/400	305	9.8	12.9	
	DSG320S1UFT	31.8	4755	16224	1390	3.42	55/400	305	9.8	12.9	
	DSG400S1UFT	39.8	6090	20779	1780	3.42	55/400	338	9.8	12.9	▲

单缸变频 DC Inverter Single Cylinder

测试条件: SEER60 Test Condition:SEER60

SM	DSM165D19UDT	16.5	2885	9844	725	3.98	—	290	8.1	9.8	
	DSM180D19UDZ	17.9	3150	10748	788	4.00	—	290	8.1	9.8	

双缸变频 DC Inverter Twin Cylinder

测试条件: SEER60 Test Condition:SEER60

TN	DTN180D32UFZ	18.1	3180	10850	785	4.05	—	280	8.1	12.9	▲
	DTN210D32UFZ	20.9	3680	12556	897	4.10	—	280	8.1	12.9	
	DTN250D32UFZ	25.0	4380	14945	1085	4.05	—	280	8.1	12.9	▲

备注: 带▲的产品为正在开发的产品  
Remarks: "▲" are being developed

环保冷媒空调压缩机  
GREEN REFRIGERANT COMPRESSOR

系列 Series	代表机型 Typical Model	排量 Displ. (cc)	制冷量 Cooling Capacity (W) I (Btu/h)	功率 Power (W)	能效比 COP (W/W)	电容 Capacitor (μ F/V)	压缩机高度 Compressor Height (mm)	排气管内径 Discharge Pipe ID (mm)	回气管内径 Suction Pipe ID (mm)	备注 Remark
--------------	-----------------------	----------------------	--	--------------------	---------------------	----------------------------	------------------------------------	------------------------------------	----------------------------------	--------------

R32

单缸变频 DC Inverter Single Cylinder

测试条件: SEER60 Test Condition:SEER60

SK	KSK66D15UEX3	6.7	2030	6926	542	3.75	—	200	8.1	9.8	▲
	KSK75D43UEZA	7.5	2320	7916	610	3.80	—	238	8.1	9.8	
	KSK89D35UEZ3	8.9	2790	9519	715	3.90	—	238	8.1	9.8	▲
	KSK89D53UEZ	8.9	2780	9485	712	3.90	—	258	8.1	9.8	
	KSK89D59UEZC	8.9	2795	9537	702	3.98	—	260	8.1	9.8	
	KSK103D53UFZ	10.3	3230	11021	839	3.85	—	260	8.1	12.9	
	KSK103D59UFZ	10.3	3235	11038	825	3.92	—	260	8.1	12.9	
	KSK103D33UEZ3	10.3	3255	11106	826	3.94	—	260	8.1	12.9	
	KSK103D43UEZ3	10.3	3255	11106	820	3.96	—	260	8.1	12.9	▲
SN	KSN98D22UFZ	9.7	3100	10577	795	3.90	—	250	8.1	12.9	▲
	KSN98D32UFZ	9.7	3100	10577	790	3.92	—	250	8.1	12.9	
	KSN98D43UFZA	9.7	3050	10407	772	3.95	—	260	8.1	12.9	
	KSN98D42UFZC	9.7	3020	10304	765	3.95	—	260	8.1	12.9	
	KSN98D64UFZ3	9.8	3055	10424	755	4.05	—	260	8.1	12.9	
	KSN108D22UFZ	10.8	3470	11840	890	3.90	—	250	8.1	12.9	
	KSN108D32UFZ	10.8	3450	11771	880	3.92	—	250	8.1	12.9	
	KSN108D43UFZA	10.8	3410	11635	855	3.99	—	260	8.1	12.9	▲
	KSN133D21UFZ	13.3	4165	14211	1090	3.82	—	260	8.1	12.9	▲
	KSN133D42UFZ	13.3	4170	14228	1055	3.95	—	260	8.1	12.9	▲
	KSN140D21UFZ	14.0	4370	14910	1135	3.85	—	260	8.1	12.9	
	KSN140D42UFZ	14.0	4365	14893	1105	3.95	—	260	8.1	12.9	▲
	KSN140D58UFZ	14.0	4365	14893	1090	3.98	—	260	8.1	12.9	▲

备注: 带▲的产品为正在开发的产品  
Remarks: "▲" are being developed

空调新能效专用变频压缩机  
DC INVERTER COMPRESSOR FOR A/C  
NEW ENERGY EFFICIENCY

- 1、高效: 压缩机能效提升8%, 系统APF能效提升6%, 满足新一级能效;  
2、静音: 压缩机噪音下降3dB, 6倍频噪音递减4~5dB, 气流脉动递减50%, 系统听感更优。

1. HIGH EFFICIENCY: COMPRESSOR COP INCREASED BY 8%,  
AIR-CONDITIONER APF INCREASED BY 6%, MEET THE UPDATED  
FIRST CLASS ENERGY REGULATION.

2. QUIET: COMPRESSOR NOISE DROPS BY 3DB, 6 OCTAVE  
NOISE DECREASING 4~5DB, AIRFLOW PULSATION DECREASING  
50%, BETTER FOR AIR-CONDITIONER AUDIO IMPRESSION.





环保冷媒空调压缩机
GREEN REFRIGERANT COMPRESSOR

Table with 12 columns: Series, Typical Model, Displ., Cooling Capacity, Power, COP, Capacitor, Compressor Height, Discharge Pipe ID, Suction Pipe ID, Remark.

R32
双缸变频 DC Inverter Twin Cylinder
Table with 12 columns: TK, TN, TM, TF, TQ, and various model specifications.

备注：带▲的产品为正在开发的产品
Remarks: "▲" are being developed

R32 环保冷媒双缸小型化压缩机
R32 TWIN-CYLINDER DC INVERTER COMPRESSOR

- 1、小径化；
2、高 APF；
3、低噪音、低振动；
4、高频化、大压缩比。
1. MINIMUM SIZE；
2. HIGH APF ENERGY EFFICIENCY；
3. LOW NOISE AND VIBRATION；
4. HIGH FREQUENCY AND LARGE COMPRESSION RATIO .



环保冷媒空调压缩机
GREEN REFRIGERANT COMPRESSOR

Table with 12 columns: Series, Typical Model, Displ., Cooling Capacity, Power, COP, Capacitor, Compressor Height, Discharge Pipe ID, Suction Pipe ID, Remark.

R32
1Φ-50Hz-220/240V
Table with 12 columns: SN, SM, SF, SG, SQ, TG, TQ, and various model specifications.

备注：带▲的产品为正在开发的产品
Remarks: "▲" are being developed

环保冷媒空调压缩机
GREEN REFRIGERANT COMPRESSOR

Table with 11 columns: Series, Typical Model, Displ., Cooling Capacity, Power, COP, Capacitor, Compressor Height, Discharge Pipe ID, Suction Pipe ID, Remark.

R32

1 φ-50Hz-220/240V 测试条件: ARI Test Condition: ARI

Table with 11 columns: Series, Typical Model, Displ., Cooling Capacity, Power, COP, Capacitor, Compressor Height, Discharge Pipe ID, Suction Pipe ID, Remark. Includes rows for SK, SN, SM, SG, SQ, and TQ series.

备注：带▲的产品为正在开发的产品
Remarks: "▲" are being developed

环保冷媒空调压缩机
GREEN REFRIGERANT COMPRESSOR

Table with 11 columns: Series, Typical Model, Displ., Cooling Capacity, Power, COP, Capacitor, Compressor Height, Discharge Pipe ID, Suction Pipe ID, Remark.

R32

1 φ-60Hz-115V 1 φ-50Hz-230V 测试条件: GX Test Condition: GX

Table with 11 columns: Series, Typical Model, Displ., Cooling Capacity, Power, COP, Capacitor, Compressor Height, Discharge Pipe ID, Suction Pipe ID, Remark. Includes rows for SK, SN, SM, SF, and SG series.

3 φ-50Hz-380V 测试条件: ARI Test Condition: ARI

Table with 11 columns: Series, Typical Model, Displ., Cooling Capacity, Power, COP, Capacitor, Compressor Height, Discharge Pipe ID, Suction Pipe ID, Remark. Includes rows for SQ, TQ, and TW series.

1 φ-60Hz-208-230V 测试条件: GX Test Condition: GX

Table with 11 columns: Series, Typical Model, Displ., Cooling Capacity, Power, COP, Capacitor, Compressor Height, Discharge Pipe ID, Suction Pipe ID, Remark. Includes row for SF series.

备注：带▲的产品为正在开发的产品
Remarks: "▲" are being developed



变频空调压缩机  
INVERTER COMPRESSOR

系列 Series	代表机型 Typical Model	排量 Displ. (cc)	制冷量 Cooling Capacity (W) I (Btu/h)	功率 Power (W)	能效比 COP (W/W)	电容 Capacitor (μ F/V)	压缩机高度 Compressor Height (mm)	排气管内径 Discharge Pipe ID (mm)	回气管内径 Suction Pipe ID (mm)	备注 Remark
--------------	-----------------------	----------------------	--	--------------------	---------------------	----------------------------	------------------------------------	------------------------------------	----------------------------------	--------------

R410A

单缸变频 DC Inverter Single Cylinder测试条件: SEER60    Test Condition:SEER60

SK	ASK75D43UEZ	7.5	2225	7592	582	3.82	—	238	8.1	9.8	
	ASK89D53UEZ	8.9	2670	9110	688	3.88	—	258	8.1	9.8	
	ASK98D50UFZ	9.8	2930	9997	768	3.82	—	260	8.1	9.8	
	ASK103D53UFZ	10.3	3120	10645	805	3.88	—	258	8.1	12.9	
	ASK103D59UFZ	10.3	3120	10645	790	3.95	—	260	8.1	12.9	
SN	ASN98D22UFZA	9.7	2920	9963	745	3.92	—	250	8.1	12.9	
	ASN98D32UFZ	9.7	2920	9963	740	3.95	—	250	8.1	12.9	
	ASN98D43UZFA	9.7	2890	9861	725	3.99	—	260	8.1	12.9	
	ASN108D22UFZ	10.8	3260	11123	832	3.92	—	250	8.1	12.9	
	ASN108D32UFZ	10.8	3260	11123	825	3.95	—	250	8.1	12.9	
	ASN108D43UFZA	10.8	3260	11123	805	4.05	—	260	8.1	12.9	
	ASN133D42UFZ	13.3	4000	13648	1000	4.00	—	260	8.1	12.9	
	ASN140D21UFZ	14.0	4225	14416	1085	3.90	—	262	8.1	12.9	
SF	ASF235D28UMT	23.5	7100	24225	1810	3.92	—	333	8.1	16.2	

双缸变频 DC Inverter Twin Cylinder测试条件: SEER60    Test Condition:SEER60

TN	ATN110D42UFZ	11.0	3285	11208	825	3.98	—	250	8.1	12.9	
	ATN130D42UFZ	13.1	3905	13324	975	4.00	—	250	8.1	12.9	
	ATN130D30UFZ	13.1	3900	13307	1005	3.88	—	250	8.1	12.9	▲
	ATN150D30UFZA	14.9	4500	15354	1155	3.90	—	270	8.1	12.9	
	ATN150D42UFZ	14.9	4480	15286	1120	4.00	—	280	8.1	12.9	
TM	ATM180D57UMT	17.6	5225	17828	1420	3.68	—	300	9.8	16.2	
	ATM240D57UMT	24.0	7225	24652	1940	3.72	—	300	9.8	16.2	
	ATM310D85UMT	30.6	9280	31663	2520	3.68	—	320	9.8	16.2	▲
	ATF200D22UMT	20.1	6075	20728	1710	3.55	—	333	9.8	16.2	
TF	ATF235D22UMT	23.5	7135	24345	1955	3.65	—	333	9.8	16.2	
	ATF235D43UMT	23.5	7140	24362	1940	3.68	—	333	9.8	16.2	
	ATF250D22UMT	25.1	7645	26085	2080	3.68	—	333	9.8	16.2	
	ATF310D43UMT	30.8	9490	32380	2600	3.65	—	333	9.8	16.2	
	ATF400D64UMV	39.8	12285	41916	3365	3.65	—	365	9.8	16.2	
	ATF400D66UMV	39.8	12285	41916	3235	3.80	—	365	9.8	16.2	
	ATF400D48UMV	39.8	12200	41602	3370	3.62	—	365	9.8	16.2	▲
	ATF420D64UMT	41.5	12875	43930	3480	3.70	—	355	9.8	16.2	▲
TQ	ATQ360D1UMU	36.2	11200	38214	3040	3.68	—	406	9.8	16.2	
	ATQ420D1UMU	41.5	12960	44220	3485	3.72	—	406	9.8	16.2	
	ATQ420D2UMU	41.5	12960	44220	3430	3.78	—	406	9.8	16.2	
	ATQ420D1UNU1	41.9	13040	44492	3435	3.80	—	406	9.8	22.2	ASH
	ATQ580D66UNT	58.0	18750	63975	4910	3.82	—	430	12.9	22.2	
	ATQ650D**UNT	65.0	21150	72164	5500	3.85	—	430	12.9	22.2	▲

变频空调压缩机  
INVERTER COMPRESSOR

系列 Series	代表机型 Typical Model	排量 Displ. (cc)	制冷量 Cooling Capacity (W) I (Btu/h)	功率 Power (W)	能效比 COP (W/W)	电容 Capacitor (μ F/V)	压缩机高度 Compressor Height (mm)	排气管内径 Discharge Pipe ID (mm)	回气管内径 Suction Pipe ID (mm)	备注 Remark
--------------	-----------------------	----------------------	--	--------------------	---------------------	----------------------------	------------------------------------	------------------------------------	----------------------------------	--------------

R410A

变频变容 Variable Volumes DC-INV Compressor测试条件: SEER60    Test Condition:SEER60

VM	AVM115D6UFZ	11.5	3350	11430	830	4.04	—	268	8.1	12.9	
----	-------------	------	------	-------	-----	------	---	-----	-----	------	--

R32

独立压缩机 I-CCC Compressor测试条件: SEER60    Test Condition:SEER60

YN	KYN103D52UFZ	9.71+0.46	3130	10680	820	3.82	—	280	8.1	12.9	▲
----	--------------	-----------	------	-------	-----	------	---	-----	-----	------	---

R32

R32 变频高转速 High Speed DC-INV Compressor测试条件: SEER60    Test Condition:SEER60

TN	KTN150D35UFT4	14.9	4720	16105	1240	3.80	—	280	8.1	12.9	▲
----	---------------	------	------	-------	------	------	---	-----	-----	------	---

备注：带▲的产品为正在开发的产品  
Remarks: “▲” are being developed

变频变容喷气增焓全能耦合压缩机

COUPLING COMPRESSOR WITH VARIABLE  
DISPLACEMENT & DC INVERTER & GAS  
INJECTION TECHNOLOGIES

- 1、-15℃环境温度制热量提升 85%，并实现 50℃出风；
- 2、快速制冷制热，时间减少一半；
- 3、无余隙差异化喷气高效运行、高 APF 能效；
- 4、2 倍容量，半速运行，实现大能力同时避免高频噪音问题。

- 1. THE HEATING CAPACITY HAS IMPROVED BY 85% AT THE AMBIENT TEMPERATURE OF -15℃, AND THE OUTLET AIR TEMPERATURE UP TO 50℃;
- 2. ACHIEVING RAPID REFRIGERATION AND HEATING, SAVING HALF THE TIME ;
- 3. VARIABLE GAS INJECTION TECHNOLOGY ACHIEVE HIGN EFFICIENCY OPERATION ;
- 4. DOUBLE DISPLACMENT MAKES HALF-SPEED RUNNING ACHIEVING LOW NOISE AT LARGE CAPACITY OPERATION.



R410A定速空调压缩机

R410A AIR-CONDITIONER COMPRESSOR

系列 Series	代表机型 Typical Model	排量 Displ. (cc)	制冷量 Cooling Capacity (W)   (Btu/h)	功率 Power (W)	能效比 COP (W/W)	电容 Capacitor (μF/V)	压缩机高度 Compressor Height (mm)	排气管内径 Discharge Pipe ID (mm)	回气管内径 Suction Pipe ID (mm)	备注 Remark
--------------	-----------------------	----------------------	--	--------------------	---------------------	---------------------------	------------------------------------	------------------------------------	----------------------------------	--------------

R410A

1ϕ-60Hz-208~230V

测试条件: ASH    Test Condition: ASH

SN	ASN53N1UAJ3	5.3	1570	5357	520	3.02	15/370	230	8.1	9.8	
	ASN68N1UDZ	6.8	2060	7029	676	3.05	20/370	250	8.1	9.8	
	ASN82N1UDZ	8.2	2515	8581	853	2.95	25/370	250	8.1	9.8	
	ASN89N1UDZ	8.9	2730	9315	895	3.05	25/370	250	8.1	9.8	
SM	ASM103N11UFZ	10.3	3075	10492	975	3.15	35/370	297	8.1	12.9	
	ASM106N1UFT	10.6	3200	10918	1015	3.15	35/370	297	8.1	12.9	
	ASM113N1UFZ	11.3	3380	11533	1073	3.15	40/370	292	8.1	12.9	
	ASM130N1UDZ	13.0	3870	13204	1270	3.05	40/370	292	8.1	9.8	
	ASM135N1UEZ	13.3	4060	13853	1290	3.15	40/370	297	8.1	12.9	
M2	ASM140N1UFT	13.9	4175	14245	1355	3.08	40/370	292	8.1	12.9	
	PA140M2A-3ET	13.9	4155	14177	1375	3.02	45/400	299	8.1	12.9	
	PA150M2AS-3KU	15.0	4500	15354	1450	3.10	45/370	321	8.1	12.9	
	PA170M2A-3FT1	17.1	5155	17589	1662	3.10	45/370	303	9.8	12.9	
	PA225M2A-3MTU1	22.4	6715	22912	2240	3.00	55/370	322	9.8	16.2	
SF	PA240M2A-3MTU2	24.0	7220	24635	2475	2.92	55/370	322	9.8	16.2	
	ASF155N1UKT	15.6	4665	15917	1465	3.18	50/400	340	8.1	12.9	
	ASF160N1UEP	16.1	4775	16292	1510	3.16	55/400	314	9.8	12.9	
	ASF165N1UFTB	16.5	4995	17043	1570	3.18	50/400	314	8.1	12.9	
	ASF200N1UKP	19.9	5975	20387	1880	3.18	55/450	336	9.8	12.9	
SG	ASG170N1UMT	17.0	5270	17981	1620	3.25	40/400	310	9.8	16.2	▲
	ASG180N1UMT	18.0	5580	19039	1715	3.25	40/400	310	9.8	16.2	▲
	ASG190N1UMT	19.0	5890	20097	1810	3.25	40/400	310	9.8	16.2	▲
	ASG200N1UMT	20.0	6200	21154	1905	3.25	40/400	310	9.8	16.2	▲
	ASG210N1UMT	21.0	6520	22246	2005	3.25	40/400	310	9.8	16.2	▲
	ASG220N1UMT	22.0	6830	23304	2100	3.25	40/400	310	9.8	16.2	▲
	ASG240N1UMT	23.8	7350	25078	2260	3.25	40/400	310	9.8	16.2	▲
	ASG290N1UMT	28.9	8900	30367	2825	3.15	40/400	310	9.8	16.2	▲
TG	ATG330N1UMU	32.7	10080	34393	3365	3.00	65/400	400	9.8	16.2	
SQ	ASQ330N1UMU	33.1	9950	33949	3230	3.08	60/400	380	9.8	16.2	

备注：带▲的产品为正在开发的产品  
Remarks: "▲" are being developed

R410A定速空调压缩机

R410A AIR-CONDITIONER COMPRESSOR

系列 Series	代表机型 Typical Model	排量 Displ. (cc)	制冷量 Cooling Capacity (W)   (Btu/h)	功率 Power (W)	能效比 COP (W/W)	电容 Capacitor (μF/V)	压缩机高度 Compressor Height (mm)	排气管内径 Discharge Pipe ID (mm)	回气管内径 Suction Pipe ID (mm)	备注 Remark
--------------	-----------------------	----------------------	--	--------------------	---------------------	---------------------------	------------------------------------	------------------------------------	----------------------------------	--------------

R410A

1ϕ-60Hz-208~230V

测试条件: GX    Test Condition: GX

SN	ASN58N11VDZ1	5.8	1965	6705	510	3.85	15/370	250	8.1	9.8	
	ASN68N2VDZB1	6.8	2320	7916	568	4.08	20/370	250	8.1	9.8	
	ASN76N1VDZ1	7.6	2600	8871	650	4.00	20/370	250	8.1	9.8	
	ASN82N2VDZ1	8.2	2815	9605	690	4.08	20/370	250	8.1	9.8	
SM	ASN84N1VBZB1	8.3	2865	9775	695	4.12	20/370	250	8.1	9.8	
	ASM103N11VEZ	10.3	3565	12164	838	4.25	35/370	290	8.1	12.9	
	ASM106N1VEZ	10.6	3680	12556	860	4.28	35/370	297	8.1	12.9	
	ASM120N1VDZ	12.0	4160	14194	990	4.20	40/370	292	8.1	9.8	
M2	PA155M2A-3ETL1	15.7	5395	18408	1250	4.32	45/370	303	9.8	12.9	
	PA160M2A-3ETL	16.0	5630	19210	1325	4.25	45/400	303	9.8	12.9	
	PA165M2A-3ETL	16.5	5760	19653	1355	4.25	45/400	303	9.8	12.9	
SF	ASF155N1VET	15.6	5430	18527	1240	4.38	50/400	303	8.1	12.9	▲
SG	ASG195N1VKP	19.5	6930	23645	1575	4.40	40/400	310	9.8	12.9	
	ASG235N1VMT	23.5	8350	28490	1920	4.35	40/400	310	9.8	16.2	

R410A

1ϕ-50Hz-230V

测试条件: GX    Test Condition: GX

SM	ASM125S1VFT	12.5	3570	12181	840	4.25	35/370	292	8.1	12.9	
	ASM127S1VFT	12.7	3680	12556	860	4.28	35/370	290	8.1	12.9	
M2	ASM130S1VDZ	13.0	3740	12761	880	4.25	35/370	290	8.1	9.8	
	PA180M2AS-7KUL	17.8	5215	17794	1235	4.22	35/370	340	8.1	12.9	
	PA185M2AS-7KUL	18.5	5420	18493	1285	4.22	35/370	340	8.1	12.9	
	PA190M2AS-7KUL	18.9	5475	18681	1310	4.18	35/370	340	8.1	12.9	
	PA200M2A-7FUL	20.0	5690	19414	1380	4.12	35/370	320	8.1	12.9	▲
SF	PA215M2AS-7KTL	21.6	6245	21308	1515	4.12	50/370	344	9.8	12.9	
	ASF190S1VKT	19.0	5610	19141	1290	4.35	45/370	322	8.1	12.9	
	PA186G2C-7KUL	18.6	5370	18322	1280	4.20	55/400	310	9.8	12.9	
G2	PA196G2C-7KNL	19.6	5675	19363	1305	4.35	55/400	310	9.8	12.9	
	PA221G2C-7MUL	21.9	6420	21905	1465	4.38	55/400	310	9.8	16.2	
SG	ASG185S1VMU	18.5	5630	19210	1295	4.35	40/400	310	9.8	16.2	
	ASG190S1VFT	19.1	5500	18766	1255	4.38	40/400	310	9.8	12.9	
	ASG195S1VKU	19.5	5625	18766	1285	4.38	40/400	310	9.8	12.9	
	ASG220S1VMU	22.0	6505	22195	1480	4.40	40/400	310	9.8	16.2	
	ASG230S1VMU	22.9	6765	23082	1530	4.42	40/400	310	9.8	16.2	

备注：带▲的产品为正在开发的产品  
Remarks: "▲" are being developed



R410A定速空调压缩机

R410A AIR-CONDITIONER COMPRESSOR

系列 Series	代表机型 Typical Model	排量 Displ. (cc)	制冷量 Cooling Capacity (W) I (Btu/h)	功率 Power (W)	能效比 COP (W/W)	电容 Capacitor (μ F/V)	压缩机高度 Compressor Height (mm)	排气管内径 Discharge Pipe ID (mm)	回气管内径 Suction Pipe ID (mm)	备注 Remark
--------------	-----------------------	----------------------	--	--------------------	---------------------	----------------------------	------------------------------------	------------------------------------	----------------------------------	--------------

R410A

1 φ -50Hz-220/240V

测试条件: GX    Test Condition: GX

SN	ASN46V1VAZ1	4.6	1250	4265	320	3.90	15/370	238	8.1	9.8	
	ASN58V1VZZ1	5.8	1625	5545	411	3.95	20/370	238	8.1	9.8	
SM	ASM89V1VFZ	8.9	2485	8479	592	4.20	20/370	290	8.1	12.9	
	ASM93V11VDZ	9.3	2570	8769	615	4.18	25/370	290	8.1	9.8	
	ASM99V1VFZ	9.8	2780	9485	650	4.28	25/370	292	8.1	12.9	
	ASM103V11VDZ	10.3	2900	9895	675	4.30	25/370	292	8.1	9.8	
	ASM113V1VDZ	11.3	3215	10970	745	4.32	30/370	292	8.1	9.8	
	ASM120V1VFT	12.0	3445	11754	805	4.28	30/370	292	8.1	12.9	
	ASM125V1VFT	12.5	3610	12317	845	4.27	35/370	292	8.1	12.9	
	ASM130V1VDZ	13.0	3760	12829	885	4.25	35/370	292	8.1	9.8	
	ASM135V1VFT	13.3	3870	13204	900	4.30	35/370	295	8.1	12.9	
	ASM140V1VFT	13.9	4060	13853	945	4.30	35/370	292	8.1	12.9	
M2	PA150M2A-4FTL	15.0	4300	14672	1025	4.20	35/370	300	8.1	12.9	
	PA190M2AS-4KUL1	18.9	5460	18630	1270	4.30	45/370	340	8.1	12.9	
	PA190M2A-4EUL1	18.9	5480	18698	1290	4.25	45/370	325	8.1	12.9	
	PA200M2A-4EUL	19.9	5760	19653	1405	4.10	50/370	325	8.1	12.9	
	PA205M2AS-4MUL	20.4	5965	20353	1420	4.20	50/370	345	9.8	16.2	
G2	PA196G2C-4MUL	19.6	5665	19329	1335	4.24	55/400	310	9.8	16.2	
	PA206G2C-4KUL	20.8	5990	20438	1410	4.25	55/400	310	9.8	12.9	
	PA216G2C-4FTL	21.6	6165	21035	1440	4.28	55/400	310	9.8	12.9	
	PA231G2C-4MUL	23.1	6760	23065	1565	4.32	50/400	345	9.8	16.2	
	PA250G2CS-4MUL	25.1	7315	24959	1695	4.32	50/400	345	9.8	16.2	
	PA270G2CS-4MUL1	27.0	7845	26767	1805	4.35	60/400	345	9.8	16.2	
	PA280G2CS-4MUL	27.9	8165	27859	1898	4.30	60/400	345	9.8	16.2	
	PA290G2CS-4MUL	28.7	8485	28951	1975	4.30	60/400	345	9.8	16.2	
	ASG195V1VMU	19.6	5700	19448	1310	4.35	40/400	310	9.8	16.2	
SG	ASG200V1VKU	20.0	5850	19960	1345	4.35	40/400	310	9.8	12.9	▲
	ASG240V2VMU	23.8	6945	23696	1595	4.35	40/400	310	9.8	16.2	▲
	ASG289V1VMU	28.9	8480	28934	1950	4.35	60/400	340	9.8	16.2	
	ATG275V1VMP	27.4	7965	27177	1895	4.20	65/400	355	9.8	16.2	▲
SQ	ASQ330V1VMU	33.0	9485	32363	2195	4.32	55/400	380	9.8	16.2	▲

备注：带▲的产品为正在开发的产品  
Remarks: "▲" are being developed

R410A定速空调压缩机

R410A AIR-CONDITIONER COMPRESSOR

系列 Series	代表机型 Typical Model	排量 Displ. (cc)	制冷量 Cooling Capacity (W) I (Btu/h)	功率 Power (W)	能效比 COP (W/W)	电容 Capacitor (μ F/V)	压缩机高度 Compressor Height (mm)	排气管内径 Discharge Pipe ID (mm)	回气管内径 Suction Pipe ID (mm)	备注 Remark
--------------	-----------------------	----------------------	--	--------------------	---------------------	----------------------------	------------------------------------	------------------------------------	----------------------------------	--------------

R410A

1 φ -50Hz-220/240V

测试条件: ASH    Test Condition:ASH

SK	ASK40V11UAZ	4.0	930	3173	365	2.55	15/370	230	8.1	9.8	
SN	ASN68V1UZZ1	6.8	1695	5783	585	2.90	20/370	250	8.1	9.8	
	ASN71V1UDD1	7.1	1735	5920	582	2.98	20/370	250	8.1	9.8	
	ASN76V1UDZ1	7.6	1890	6449	630	3.00	25/370	250	8.1	9.8	
	ASN82V1UDZ	8.2	2035	6943	690	2.95	25/370	250	8.1	9.8	
	ASN86V1UDZ	8.6	2140	7302	725	2.95	25/370	250	8.1	9.8	
SM	ASM99V2UDZ	9.8	2395	8172	788	3.04	25/370	292	8.1	9.8	
M2	PA170M2C-4ET2	17.1	4190	14296	1385	3.03	35/400	300	8.1	12.9	
	PA185M2C-4FT2	18.5	4495	15337	1500	3.00	35/400	300	8.1	12.9	
	PA200M2A-4ET2	20.0	5000	17060	1695	2.95	40/370	314	9.8	12.9	
	PA215M2AS-4KU	21.5	5355	18271	1845	2.90	50/400	314	9.8	12.9	
	PA225M2CS-4KU2	22.4	5500	18766	1835	3.00	50/370	340	8.1	12.9	
	PA240M2CS-4KU1	23.9	5840	19926	1980	2.95	50/370	340	8.1	12.9	
SF	ASF205V1UEUB	20.5	5160	17606	1655	3.12	45/400	314	8.1	12.9	
G2	PA260G2C-4FU	26.0	6500	22178	2130	3.05	65/400	310	9.8	12.9	
	PA270G2CS-4MU1	27.0	6825	23287	2235	3.05	60/400	345	9.8	16.2	
	PA290G2CS-4MU1	28.7	7295	24891	2410	3.03	50/400	345	9.8	16.2	
SG	ASG260V1VMU	26.0	6550	22349	2100	3.12	40/400	310	9.8	16.2	▲
	ASG290V1VMU	28.9	7350	25078	2355	3.12	60/400	324	9.8	16.2	▲
TG	ATG330V1UMP	32.7	8230	28081	2815	2.92	65/400	380	9.8	16.2	
TQ	ATQ375V1UMU	37.7	9615	32806	3255	3.05	75/400	405	9.8	16.2	
	ATQ390V1UMT	38.9	9825	33523	3190	3.08	70/400	405	9.8	16.2	

3 φ -50Hz-380V

测试条件: ASH    Test Condition:ASH

SQ	ASQ280Y1UMP	28.0	6930	23645	2200	3.15	-	380	9.8	16.2	
	ASQ330Y1UMP	33.0	8190	27944	2645	3.10	-	380	9.8	16.2	
TQ	ATQ375Y1UMU	37.7	9420	32141	3055	3.08	-	405	9.8	16.2	
	ATQ480Y1UNT	48.0	12200	41626	4225	3.10	-	405	9.8	22.2	▲
TW	ATW480Y1UNM	48.1	12170	41524	4025	3.02	-	460	12.9	22.2	
	ATW510Y1UNYA	51.0	13040	44492	4260	3.06	-	440	12.9	22.2	
	ATW550Y1UNYA	55.0	14270	48689	4620	3.08	-	440	12.9	22.2	▲
	ATW590Y1UNK	59.0	15265	52084	5090	3.00	-	460	12.9	22.2	
	ATW630Y1UNM*	63.4	16465	56179	5340	3.08	-	460	12.9	22.2	▲

备注：带▲的产品为正在开发的产品  
Remarks: "▲" are being developed

R410A定速空调压缩机

R410A AIR-CONDITIONER COMPRESSOR

系列 Series	代表机型 Typical Model	排量 Displ. (cc)	制冷量 Cooling Capacity (W) I (Btu/h)	功率 Power (W)	能效比 COP (W/W)	电容 Capacitor (μF/V)	压缩机高度 Compressor Height (mm)	排气管内径 Discharge Pipe ID (mm)	回气管内径 Suction Pipe ID (mm)	备注 Remark
--------------	-----------------------	----------------------	--	--------------------	---------------------	---------------------------	------------------------------------	------------------------------------	----------------------------------	--------------

R410A

1ϕ-60Hz-115V <span>测试条件: GX    Test Condition: GX</span>										
SK	ASK44E1VAJ	4.4	1480	5050	378	3.92	35/250	230	8.1	9.8
	ASK53E1VAZ	5.3	1825	6227	465	3.92	35/250	230	8.1	9.8
SN	ASN45E2VAJ3	4.5	1510	5152	360	4.20	35/250	238	8.1	9.8
	ASN52E2VAZ3	5.2	1745	5954	420	4.15	40/250	240	8.1	9.8
	ASN68E2VAZB1	6.8	2290	7813	555	4.12	50/250	250	8.1	9.8
	ASN71E1VBZ	7.1	2445	8342	596	4.10	45/250	245	8.1	9.8
	ASN76E11VDDA1	7.6	2555	8718	635	4.02	45/250	250	8.1	9.8
	ASN81E1VBZB1	8.0	2720	9281	660	4.12	50/250	250	8.1	9.8
	ASN83E1VBZ1	8.3	2845	9707	690	4.12	50/250	245	8.1	9.8
	ASN86E1VBZ	8.6	2990	10202	730	4.10	50/250	247	8.1	9.8
SM	ASN86E11UZDS1	8.6	2620	8939	880	2.98	50/250	250	6.53	9.8
	ASM100E11VEZ	9.9	3425	11686	800	4.28	70/250	290	8.1	12.9
	ASM103E12VEZ	10.3	3525	12027	835	4.22	70/250	290	8.1	12.9
	ASM106E2VEZ	10.6	3700	12624	865	4.28	70/250	297	8.1	12.9
	ASM113E1UDZ	11.3	3340	11396	1095	3.05	60/250	292	8.1	9.8
	ASM113E3UFZK	11.3	3450	11771	1105	3.12	70/250	270	8.1	12.9
	ASM113E3UBZK	11.3	3415	11652	1100	3.10	70/250	270	8.1	9.8
	ASM127E1VET	12.7	4485	15303	1048	4.28	70/250	290	8.1	12.9
	ASM130E1VET	13.0	4535	15473	1075	4.22	70/250	292	8.1	12.9

1ϕ-60Hz-127V <span>测试条件: GX    Test Condition: GX</span>										
SN	ASN86F1VBZ1	8.6	2985	10185	762	3.92	45/250	245	8.1	9.8

1ϕ-60Hz-127V <span>测试条件: ASH    Test Condition: ASH</span>										
SM	ASM113F1UDRC	11.3	3420	11669	1120	3.05	60/250	270	8.1	9.8

R22定速空调压缩机

R22 AIR-CONDITIONER COMPRESSOR

系列 Series	代表机型 Typical Model	排量 Displ. (cc)	制冷量 Cooling Capacity (W) I (Btu/h)	功率 Power (W)	能效比 COP (W/W)	电容 Capacitor (μF/V)	压缩机高度 Compressor Height (mm)	排气管内径 Discharge Pipe ID (mm)	回气管内径 Suction Pipe ID (mm)	备注 Remark
--------------	-----------------------	----------------------	--	--------------------	---------------------	---------------------------	------------------------------------	------------------------------------	----------------------------------	--------------

R22

1ϕ-60Hz-208~230V <span>测试条件: ASH    Test Condition:ASH</span>										
SM	HSM130N12UEZ	13.0	2750	9383	846	3.25	30/370	292	8.1	12.9
	HSM165N11UEZ	16.5	3500	11942	1060	3.30	40/370	292	8.1	12.9
	HSM170N2UFZ	16.9	3540	12078	1115	3.17	40/370	292	8.1	12.9
M2	PH210M2A-3FT	20.9	4610	15729	1365	3.38	45/370	292	8.2	12.9
	PH250M2A-3FTU2	24.8	5285	18032	1625	3.25	40/370	292	8.2	12.9
	PH260M2AS-3KUU1	26.1	5625	19193	1815	3.10	40/370	333	9.8	12.9
SG	HSG290N1UKU	29.0	6290	21461	1825	3.45	40/400	310	9.8	▲
	HSG300N1UKU	29.8	6465	22059	1875	3.45	40/400	310	9.8	▲
	HSG310N1UKU	30.9	6780	23133	1965	3.45	40/400	310	9.8	▲
	HSG330N1UMU	33.1	7260	24771	2105	3.45	40/400	310	9.8	▲
	HSG340N1UMU	34.1	7450	25419	2160	3.45	40/400	310	9.8	▲
	HSG360N1UKU	35.9	7790	26579	2280	3.42	40/400	324	9.8	▲
	HSG370N1UMU	37.0	8100	27637	2370	3.42	40/400	324	9.8	▲

测试条件: GX    Test Condition:GX										
SN	HSN102N1VDZ	10.2	2415	8240	575	4.20	15/370	255	8.1	9.8
SM	HSM145N2VDT	14.6	3480	11874	830	4.19	35/370	292	8.1	9.8

备注：带▲的产品为正在开发的产品  
Remarks: "▲" are being developed



R22定速空调压缩机

R22 AIR-CONDITIONER COMPRESSOR

系列 Series	代表机型 Typical Model	排量 Displ. (cc)	制冷量 Cooling Capacity (W)   (Btu/h)	功率 Power (W)	能效比 COP (W/W)	电容 Capacitor (μF/V)	压缩机高度 Compressor Height (mm)	排气管内径 Discharge Pipe ID (mm)	回气管内径 Suction Pipe ID (mm)	备注 Remark
--------------	-----------------------	----------------------	--	--------------------	---------------------	---------------------------	------------------------------------	------------------------------------	----------------------------------	--------------

R22

1ϕ-50Hz-220/240V

测试条件: ASH    Test Condition:ASH

SN	HSN82V11UDZ1	8.2	1440	4913	488	2.95	20/370	250	8.1	9.8	
	HSM135V1UDZ	13.3	2335	7967	708	3.30	25/370	292	8.1	9.8	
	HSM145V1UFZ	14.6	2568	8762	783	3.28	25/370	292	8.1	12.9	
	HSM150V5UFZ	15.1	2640	9008	800	3.30	25/370	292	8.1	12.9	
	HSM155V1UFZ	15.3	2665	9093	815	3.27	25/370	292	8.1	12.9	
	HSM160V5UFZ	15.8	2755	9400	840	3.28	25/370	292	8.1	12.9	
	HSM160V6UFZ	15.8	2770	9445	835	3.32	30/370	292	8.1	12.9	
	HSM165V1UFZ	16.4	2845	9707	870	3.27	30/370	292	8.1	12.9	
	HSM165V3UDZA	16.4	2855	9741	915	3.12	30/370	292	8.1	9.8	▲
	HSM170V1UFZ	16.9	2920	9963	885	3.30	30/370	292	8.1	12.9	
	HSM190V1UFT	19.2	3340	11396	1010	3.31	35/370	300	8.1	12.9	
	HSM195V1UFT	19.7	3400	11601	1045	3.25	35/370	300	8.1	12.9	
	HSM200V1UFT	20.1	3480	11874	1070	3.25	35/370	300	8.1	12.9	
	HSM200V3UDZ	20.1	3470	11840	1145	3.03	35/370	300	8.1	9.8	
	HSM205V1UFT	20.5	3510	11976	1090	3.22	35/370	300	8.1	12.9	
	HSM210V1UFT	20.9	3605	12300	1110	3.25	40/370	300	8.1	12.9	
	HSM215V3UFT	21.4	3710	12659	1195	3.10	35/370	300	8.1	12.9	
	HSM215V3UDZA	21.4	3700	12617	1215	3.05	35/370	300	8.1	9.8	▲
	HSM215V4UFTA	21.4	3700	12624	1140	3.25	40/370	300	8.1	12.9	
	HSM220V3UFT	22.3	3880	13239	1220	3.18	40/370	300	8.1	12.9	
M2	PH225M2A-4FT	22.4	3915	13358	1265	3.09	35/400	314	8.2	12.9	
	PH250M2C-4FT1	25.0	4310	14706	1370	3.15	35/370	292	8.2	12.9	
	PH270M2CS-4KU2	27.0	4745	16190	1490	3.18	35/370	333	9.8	12.9	
	PH280M2CS-4KU	28.1	4925	16804	1515	3.25	35/370	348	9.8	12.9	
	PH290M2A-4FT1	28.8	5090	17367	1650	3.08	35/370	311	9.8	12.9	
G2	PH310M2AS-4KTH	31.0	5565	18988	1750	3.18	40/400	335	8.2	12.9	
	PH420G2CS-4KU1	42.3	7420	25317	2390	3.10	50/400	354	9.8	12.9	
SF	PH440G2CS-4MU	43.5	7810	26648	2390	3.27	50/400	354	9.8	16.2	
	HSF300V1VKU	30.0	6059	20672	1824	3.32	50/400	330	9.8	12.9	
SG	HSF320V1UKU	31.9	5680	19380	1710	3.32	50/400	330	8.1	12.9	
	HSG300V1UKU	30.9	5350	18254	1595	3.35	40/400	310	9.8	12.9	▲
	HSG340V1UKU	34.1	6080	20745	1790	3.40	40/400	310	9.8	12.9	▲
SQ	HSG370V1UMU	37.0	6650	22690	1955	3.40	40/400	324	9.8	16.2	▲
	HSQ440V1TMV	43.6	7865	26835	2460	3.20	60/400	380	9.8	16.2	
TG	HTG340V1UMU	34.1	6020	20540	1870	3.22	60/400	355	9.8	16.2	

3ϕ-50Hz-380V

测试条件: ASH    Test Condition:ASH

X3	YH460X3CS-4MUC1	45.9	8000	27296	2580	3.10	-	396.5	9.8	16.2	
	YH480X3CS-4MUC1	47.9	8350	28490	2690	3.10	-	396.5	9.8	16.2	
TQ	HTQ440Y1UMP	43.8	7720	26341	2410	3.20	-	380	9.8	16.2	
TW	HTW715Y2UNY	71.5	13400	45721	4060	3.30	-	440	12.9	22.2	ARI
	HTW770Y2UNY	77.0	14500	49474	4300	3.37	-	440	12.9	22.2	ARI
	HTW835Y2UNY	83.5	15630	53330	4790	3.26	-	440	12.9	22.2	ARI

R22定速空调压缩机

R22 AIR-CONDITIONER COMPRESSOR

系列 Series	代表机型 Typical Model	排量 Displ. (cc)	制冷量 Cooling Capacity (W)   (Btu/h)	功率 Power (W)	能效比 COP (W/W)	电容 Capacitor (μF/V)	压缩机高度 Compressor Height (mm)	排气管内径 Discharge Pipe ID (mm)	回气管内径 Suction Pipe ID (mm)	备注 Remark
--------------	-----------------------	----------------------	--	--------------------	---------------------	---------------------------	------------------------------------	------------------------------------	----------------------------------	--------------

R22

1ϕ-50Hz-220V

测试条件: GX    Test Condition:GX

SM	HSM170V15VFZ	16.9	3245	11072	738	4.40	35/370	292	8.1	12.9	
	HSM170V15VDP	16.9	3315	11304	750	4.42	35/370	292	8.1	9.8	▲
	HSM215V1VFT	21.4	4160	14185	935	4.45	40/370	300	8.1	12.9	▲
	HSM220V1VFT	22.3	4365	14885	980	4.45	40/370	300	8.1	12.9	▲
M2	PH190M2A-4FTL1	18.9	3760	12829	845	4.45	35/370	292	8.2	12.9	
	PH200M2A-4FTL1	19.9	3960	13512	890	4.45	35/370	292	8.2	12.9	
	PH210M2A-4FTL1	20.9	4185	14279	935	4.48	35/370	292	8.2	12.9	
SF	HSF215V1VKT	21.7	4360	14877	947	4.60	35/370	300	8.1	12.9	
SG	HSG300V1VKU	30.0	6040	20608	1300	4.65	40/400	310	9.8	12.9	
	HSG310V1VKU	30.9	6230	21257	1340	4.65	40/400	310	9.8	12.9	▲
G2	PH290G2C-4KUL1	28.7	5760	19653	1280	4.50	55/400	310	9.8	12.9	
	PH300G2C-4KUL1	29.7	5970	20370	1320	4.52	55/400	310	9.8	12.9	
	PH310G2C-4KUL	30.8	6135	20933	1370	4.48	55/400	310	9.8	12.9	
	PH400G2CS-4MUL	39.8	8095	27620	1800	4.50	55/400	354	9.8	16.2	
M3	PH420M3CS-4MUL	42.0	8500	29002	1925	4.42	60/400	381	9.8	16.2	
	PH430M3CS-4MUL1	42.6	8655	29531	1985	4.36	65/400	381	9.8	16.2	
	PH450M3CS-4MUL1	45.1	9140	31186	2100	4.35	60/400	381	9.8	16.2	
SQ	HSQ440V1VMU	43.6	8920	30435	1960	4.55	60/400	381	9.8	16.2	
	HSQ450V1VMU	43.6	9015	30759	2050	4.40	60/400	381	9.8	16.2	▲

备注: 带▲的产品为正在开发的产品  
Remarks: "▲" are being developed



1.5HP 超高效定速压缩机

1.5HP HIGH EFFICIENCY FIX-SPEED COMPRESSOR

- 1、高效电磁钢板结合优化的磁路计算，确保超高效压缩机电机设计；
- 2、超高效泵体。

- 1. USE EFFICIENT ELECTROMAGNETIC STEEL SHEETS COMBINED WITH OPTIMIZED MAGNETIC CIRCUIT COMPUTATION, ACHIEVING ULTRA-EFFICIENT DESIGN OF COMPRESSOR MOTOR;
- 2. ULTRA-EFFICIENT MECHANICAL STRUCTURE.

R22定速空调压缩机

R22 AIR-CONDITIONER COMPRESSOR

系列 Series	代表机型 Typical Model	排量 Displ. (cc)	制冷量 Cooling Capacity (W)   (Btu/h)	功率 Power (W)	能效比 COP (W/W)	电容 Capacitor (μF/V)	压缩机高度 Compressor Height (mm)	排气管内径 Discharge Pipe ID (mm)	回气管内径 Suction Pipe ID (mm)	备注 Remark
--------------	-----------------------	----------------------	--	--------------------	---------------------	---------------------------	------------------------------------	------------------------------------	----------------------------------	--------------

R22

1ϕ-50Hz-230V

测试条件: GX Test Condition: GX

SM	HSM190S1VFT	19.2	3735	12744	853	4.38	35/370	300	8.1	12.9	
	HSM195S1VFT	19.7	3810	13000	870	4.38	35/370	300	8.1	12.9	
	HSM200S1VFT	20.1	3895	13290	895	4.35	35/370	300	8.1	12.9	
M2	PH190M2A-7FTL	18.9	3780	12897	855	4.42	40/370	292	8.2	12.9	
SF	HSF280S1VKPA	28.1	5590	19073	1205	4.64	45/370	320	9.8	12.9	
	HSF285S2VFP	28.6	5690	19414	1250	4.55	45/370	320	9.8	12.9	
	HSF290S1VKPA	29.0	5790	19755	1245	4.65	45/370	320	9.8	12.9	
SG	HSG265S1VKT	26.4	5360	18288	1165	4.60	40/400	310	9.8	12.9	
	HSG275S1VKT	27.5	5585	19056	1200	4.65	40/400	310	9.8	12.9	
	HSG280S1VKT	28.5	5695	19431	1225	4.65	40/370	310	9.8	12.9	
	HSG290S1VKU	29.0	5905	20148	1270	4.65	40/370	310	9.8	12.9	
	HSG340S1VMU	34.0	6915	23594	1510	4.58	45/400	310	9.8	16.2	
G2	PH300G2C-7KUL	29.8	5980	20404	1300	4.60	55/400	310	9.8	12.9	
	PH360G2C-7MUL	36.0	7255	24754	1585	4.58	55/400	324	9.8	16.2	

测试条件: ASH Test Condition:ASH

SM	HSM185S2UFT	18.7	3245	11072	1055	3.08	35/370	300	8.1	12.9	
	HSM205S1UFT	20.5	3540	12078	1105	3.20	40/370	300	8.1	12.9	
G2	PH360G2C-7MU	36.0	6425	21922	1935	3.32	60/400	324	9.8	16.2	
SG	HSG370S1UMU	37.0	6655	22707	1960	3.40	45/400	324	9.8	16.2	

宽电压机种 WIDE VOLTAG 1ϕ-50Hz-220V

测试条件: ASH Test Condition:ASH

M2	PH210M2A-4FTSH	20.9	3785	12914	1215	3.12	45/370	293	8.1	12.9	
	PH215M2A-4FTSH	21.4	3885	13256	1245	3.12	45/400	293	8.1	12.9	
G2	PH290G2C-4FTSH	28.7	5170	17640	1655	3.12	60/400	324	9.8	12.9	

T3空调压缩机

T3 AIR-CONDITIONER COMPRESSOR

系列 Series	代表机型 Typical Model	排量 Displ. (cc)	制冷量 Cooling Capacity (W)   (Btu/h)	功率 Power (W)	能效比 COP (W/W)	电容 Capacitor (μF/V)	压缩机高度 Compressor Height (mm)	排气管内径 Discharge Pipe ID (mm)	回气管内径 Suction Pipe ID (mm)	备注 Remark
--------------	-----------------------	----------------------	--	--------------------	---------------------	---------------------------	------------------------------------	------------------------------------	----------------------------------	--------------

R22

1ϕ-50Hz-220/240V

测试条件: ASH Test Condition: ASH

M2	PH200M2A-4FTS1	19.9	3555	12130	1095	3.25	35/370	292	8.2	12.9	
	PH310M2AS-4KTS1	31.0	5620	19175	1755	3.20	50/370	348	9.8	12.9	
SF	HSF210V1SFT	20.9	3680	12556	1115	3.30	35/370	314	8.1	12.9	
SG	HSG290V1TKT	29.0	5200	17742	1520	3.42	45/400	310	9.8	12.9	
	HSG310V1TKT	30.9	5540	18902	1630	3.40	45/400	324	9.8	12.9	
	HSG330V1TKT	33.1	5935	20250	1735	3.42	45/400	324	9.8	12.9	▲
	HSG340V1TKT	34.1	6115	20864	1800	3.40	45/400	310	9.8	12.9	▲
	HSG360V1TFT	35.9	6435	21956	1905	3.38	60/400	324	9.8	12.9	▲
G2	PH400G2CS-4KTS1	39.8	7080	24157	2250	3.15	60/400	354	9.8	12.9	
	PH420G2CS-4KTS1	42.3	7540	25726	2370	3.18	60/400	354	9.8	12.9	
	PH440G2CS-4KTS1	43.5	7685	26221	2500	3.07	60/400	354	9.8	12.9	

1ϕ-50Hz-230V

测试条件: ASH Test Condition: ASH

G2	PH290G2C-7KTS	28.7	5105	17418	1525	3.35	60/400	310	9.8	12.9	
	PH420G2CS-7KTS	42.3	7525	25675	2390	3.15	65/400	354	9.8	12.9	

1ϕ-60Hz-230V

测试条件: ASH Test Condition: ASH

M2	PH185M2A-3FTS1	18.5	4050	13819	1245	3.25	40/370	292	8.2	12.9	
	PH240M2A-3FTS1	24.0	5260	17947	1740	3.02	40/370	292	8.2	12.9	
	PH260M2AS-3KTS2	26.1	5680	19380	1765	3.22	40/400	333	9.8	12.9	
	PH280M2AS-3KTS1	27.9	6085	20762	2025	3.00	40/400	333	9.8	12.9	
G2	PH260G2C-3KTS3	26.1	5690	19414	1670	3.41	60/400	305	9.8	12.9	
SG	HSG300N1TKT	29.8	6410	21871	1860	3.45	45/400	310	9.8	12.9	
	HSG310N1TKT	30.9	6645	22673	1925	3.45	45/400	310	9.8	12.9	▲
	HSG330N1TKT	33.1	7120	24293	2080	3.42	60/400	310	9.8	12.9	▲
	HSG340N1TMT	34.0	7310	24942	2135	3.42	60/400	310	9.8	16.2	▲

R410A

1ϕ-50Hz-220/240V

测试条件: ASH Test Condition: ASH

SM	ASM140V1SFT	13.9	3500	11942	1200	2.92	40/370	290	8.1	12.9	▲
SF	ASF180V1SKT	18.0	4535	15473	1460	3.11	50/400	340	9.8	12.9	
	ASF190V1SFVB	19.1	4820	16446	1585	3.04	45/400	314	8.1	12.9	
SG	ASG180V1SKT	18.0	4540	15490	1455	3.12	55/400	310	9.8	12.9	
	ASG185V1SKT	18.6	4670	15934	1470	3.18	55/400	310	9.8	12.9	
	ASG205V1SKT	20.5	5155	17589	1620	3.18	55/400	310	9.8	12.9	
	ASG235V1SKT	23.5	5910	20165	1875	3.15	60/400	344	9.8	12.9	
	ASG250V1SKT	25.1	6310	21530	2005	3.15	60/400	344	9.8	12.9	
G2	PA185G2CS-4KTM1	18.6	4585	15644	1525	3.01	55/400	310	9.8	12.9	
	PA250G2CS-4KTM2	25.1	6285	21444	2060	3.05	60/400	344	9.8	12.9	
SQ	ASQ290V1SMP	29.0	7265	24788	2305	3.15	60/400	380	9.8	16.2	▲
	ASQ310V1SMP	30.9	7770	26511	2490	3.12	60/400	380	9.8	16.2	▲
TG	ATG310V1SMP	30.7	7795	26597	2600	3.00	65/400	380	9.8	16.2	▲
TQ	ATQ360V1SMP	36.6	9250	31561	3065	3.02	80/400	405	9.8	16.2	
	ATQ420V1SMT	41.9	10500	35826	3525	2.98	90/400	405	12.9	16.2	▲



T3空调压缩机
T3 AIR-CONDITIONER COMPRESSOR

Table with 12 columns: Series, Typical Model, Displ., Cooling Capacity, Power, COP, Capacitor, Compressor Height, Discharge Pipe ID, Suction Pipe ID, Remark.

R410A
1 φ-50Hz-230V
Table with 12 columns: Series, Typical Model, Displ., Cooling Capacity, Power, COP, Capacitor, Compressor Height, Discharge Pipe ID, Suction Pipe ID, Remark.

1 φ-60Hz-230V
Table with 12 columns: Series, Typical Model, Displ., Cooling Capacity, Power, COP, Capacitor, Compressor Height, Discharge Pipe ID, Suction Pipe ID, Remark.

3 φ-50Hz-380V
Table with 12 columns: Series, Typical Model, Displ., Cooling Capacity, Power, COP, Capacitor, Compressor Height, Discharge Pipe ID, Suction Pipe ID, Remark.

备注：带▲的产品为正在开发的产品
Remarks: "▲" are being developed

T3空调压缩机
T3 AIR-CONDITIONER COMPRESSOR

Table with 12 columns: Series, Typical Model, Displ., Cooling Capacity, Power, COP, Capacitor, Compressor Height, Discharge Pipe ID, Suction Pipe ID, Remark.

R410A
T3单缸变频 T3 DC Inverter Single Cylinder
Table with 12 columns: Series, Typical Model, Displ., Cooling Capacity, Power, COP, Capacitor, Compressor Height, Discharge Pipe ID, Suction Pipe ID, Remark.

T3双缸变频 T3 DC Inverter Twin Cylinder
Table with 12 columns: Series, Typical Model, Displ., Cooling Capacity, Power, COP, Capacitor, Compressor Height, Discharge Pipe ID, Suction Pipe ID, Remark.

备注：带▲的产品为正在开发的产品
Remarks: "▲" are being developed

高效、静音中东向T3专用频压缩机
T3 DC INVERTER COMPRESSOR FOR MIDDLE EAST

- 1、机械部和电机部结构优化及材料升级，满足中东极端高温环境，确保产品的可靠性；
  - 2、高频率转速运行，低频12rps稳定上油，高频120rps极速制冷。
- 1.STRUCTURAL OPTIMIZATION AND MATERIAL UPGRADE OF THE MECHANICAL PARTS, MEETING THE EXTREME HIGH TEMPERATURE ENVIRONMENTS IN MIDDLE EAST AND ENSURING THE 0 PRODUCT FAULT;
2. HIGH FREQUENCY OPERATION, STABLE LUBRICANT SUPPLY AT LOW FREQUENCY OF 12HZ, AND SWIFT REFRIGERATION AT HIGH FREQUENCY OF 120HZ.



除湿用压缩机

DEHUMIDIFIER COMPRESSOR

系列 Series	代表机型 Typical Model	排量 Displ. (cc)	制冷量 Cooling Capacity (W)   (Btu/h)	功率 Power (W)	能效比 COP (W/W)	电容 Capacitor (μF/V)	压缩机高度 Compressor Height (mm)	排气管内径 Discharge Pipe ID (mm)	回气管内径 Suction Pipe ID (mm)	备注 Remark
--------------	-----------------------	----------------------	--	--------------------	---------------------	---------------------------	------------------------------------	------------------------------------	----------------------------------	--------------

R410A

1 φ -60Hz-115V

测试条件: GX Test Condition:GX

SK	ASK32E11VZDX	3.2	1030	3514	290	3.55	25/370	210	6.53	9.8	▲
	ASK43E11VZDX	4.3	1380	4709	375	3.68	35/370	210	6.53	9.8	▲
	ASK56E11VZDX	5.6	1865	6363	488	3.82	40/370	235	6.53	9.8	▲
	ASK68E11VZZX	6.8	2330	7950	605	3.85	45/250	240	6.53	9.8	
SN	ASN84E12VBDB1	8.3	2820	9622	685	4.12	50/250	250	8.1	9.8	
	ASN86E11VBD1	8.6	2970	10134	725	4.10	50/250	248	8.1	9.8	

测试条件: ASH Test Condition: ASH

SK	ASK34E14UZDX	3.4	990	3378	380	2.61	25/250	210	6.53	9.8	
SN	ASN71E11UZDX1	7.1	2140	7302	708	3.02	45/250	242	8.1	9.8	
	ASN71E11UZDT1	7.1	2140	7302	708	3.02	45/250	242	6.53	9.8	

R410A

1 φ -50Hz-220V

测试条件: GX Test Condition: GX

SK	ASK32V11VZDX	3.2	825	2815	258	3.20	15/370	210	6.53	9.8	
	ASK40V13VZDX	4.0	1090	3719	319	3.42	15/370	220	6.53	9.8	
	ASK46V13VZDX	4.6	1272	4340	359	3.54	15/370	220	6.53	9.8	

测试条件: ASH Test Condition: ASH

SN	ASN76V13UZDX1	7.6	1910	6517	655	2.92	20/370	242	6.53	9.8	
	ASN86V1UZDA1	8.6	2190	7472	750	2.92	25/370	252	8.1	9.8	
	ASN89V1UZDA1	8.9	2270	7745	778	2.92	25/370	252	8.1	9.8	

R410A

1 φ -60Hz-230V

测试条件: ASH Test Condition: ASH

SK	ASK31N12UZZX	3.1	860	2934	355	2.42	15/370	220	6.53	9.8	
	ASK37N12UZZX	3.7	1045	3566	405	2.58	15/370	220	6.53	9.8	

R410A

单缸变频 DC Inverter Single Cylinder

测试条件: SEER60 Test Condition:SEER60

SK	ASK89D53UEDF	8.9	2670	9110	688	3.88	—	257	6.53	9.8	弯管
----	--------------	-----	------	------	-----	------	---	-----	------	-----	----

R134a

1 φ -50Hz-220V 1 φ -60Hz-115V

测试条件: ASH Test Condition: ASH

SK	JSK64V16UZH	6.4	735	2508	288	2.55	15/370	183	6.53	6.53	
----	-------------	-----	-----	------	-----	------	--------	-----	------	------	--

备注: 带▲的产品为正在开发的产品  
Remarks: "▲" are being developed

制冷量测试条件



REFRIGERATING CAPACITY TEST CONDITION

机种系列 Compressor Series	定速机种 Fixed-Frequency			直流变频 DC Inverter
测定电源 Test Power Source				专用变频器,60rps时 Inverter Driving at 60rps
测试条件 Test Condition	ARI	GX	ASH	SEER60
冷凝温度 Condensing Temp.℃	54.4	46.0	54.4	42.3
过冷液温度 Liquid Temp.℃	46.1	41.0	46.1	34.3
蒸发温度 Evaporating Temp.℃	7.2	10.0	7.2	2.7
吸气温度 Suction Temp.℃	18.3	18.0	35.0	12.8
环境温度 Ambient Temp.℃	35.0	35.0	35.0	35.0
排气温度 Discharge Temp.℃			85.0	
备注 Remarks				输入功率包含 变频器功率 Includ. Inverter Power
	● 对应高效产品 Forhigherefficiencyproducts ◆ 强制空冷 ForcedAirCooling ☆ ASH冷冻冷藏专用测试工况 ASHrefrigerationtestcondition ▲ 热泵热水专用机种测试工况 Testingconditionsforspecialheat- pumpwaterheatercompressor			





压缩机标准包装
COMPRESSOR STANDARD PACKAGE

<div>依据运输要求，分为出口包装和内销包装，分别见右图： We have export and domestic package types, see the right pictures</div> <div><div>20英尺集装箱=20箱 20-foot container=20Boxes</div><div><div><div><div>出口包装 Export Packing</div></div><div><div>内销包装 Domestic Packing</div></div></div></div></div>															
箱体尺寸 Package Dimensions		1	2	3	4	5	6	7	8	9	10	11	12	13	14
出口 (内销) (Domestic)	L(m)	1.144(1.100)	1.144(1.100)	1.144(1.100)	1.144(1.100)	1.144(1.100)	1.144(1.122)	1.144(1.122)	1.144(1.122)	1.144(1.122)	1.144(1.122)	1.144(1.122)	1.144(1.122)	1.144(1.122)	1.144(1.122)
	W(m)	1.108(1.100)	1.108(1.100)	1.108(1.100)	1.108(1.100)	1.108(1.100)	1.108(1.086)	1.108(1.086)	1.108(1.086)	1.108(1.086)	1.108(1.086)	1.108(1.086)	1.108(1.086)	1.108(1.086)	1.108(1.086)
	H(m)	0.794-1.052	0.758-0.798	0.947-1.034	0.762-0.85	0.834-0.854	0.977-1.031	0.834-0.852	0.748-0.838	0.746-0.796	0.8-0.848	0.748-0.852	0.76-0.988	0.736-1.05	0.83-0.977
压缩机重量(kg) Qty/Gr./Wt./Box	30-108 SK	120/737-863													
	76-150 SN		80/717-817												
	45-108 SN			120/929-1169											
	89-215 SM(φ 150)				80/700-1084										
	103-220 SM(φ 176)					60/642-822									
	55-108 G0C						120/995-1145								
	125-215 G1(φ 150)							80/839-1079							
	130-195 G1(φ 176)								60/757-823						
	82-180 X1(φ 150)									80/789-1047					
	108-180 X1(φ 176)										60/727-799				
	79-130 M1(φ 150)											80/695-1015			
	108-130 M1C												60/556-733		
	110-210 S1(φ 150)													80/751-847	
	130-340 X2/M2														60/846-1152
	251-530 X3														48/905-1270
	180-440 G2														
<div>注：重量一栏为包装机种的毛重区间，以上数据仅供参考。（单位：千克） Note: Gr. Wt.---- The range of Gross Weight is the weight when packing models, the above data could only be used as a reference; Unit:kg. 本资料中数据如有变更，恕不通知。 Data can be subject to change without notice.</div>															

压缩机标准附件
COMPRESSOR ACCESSORIES

标准附件 Accessories		内保护器定速机种 Internal OLP Fixed-frequency Model	外保护器定速机种 External OLP Fixed-frequency Model	对应变频机种 AC /DC Inverter Model	
				需感温器 Needing thermal sensor	不需感温器 No thermal sensor
端子罩 Terminal Cover					
					
					
端子垫片 Terminal Packing					
					
					
端子螺母 Terminal Nut					
端子螺母垫片 Terminal Nut Washer					
外置保护器 External OLP					
感温器 Thermal Sensor					
橡胶垫 Rubber Cushion (3 Purchase)					
					